



PF92333 Pedestal Sump Pump

Product Features

- Tough thermoplastic construction
- Non-corrosive plated steel drive shaft
- Clog resistant, stainless steel impeller
- Metal switch arm for strength & durability
- 1-1/4" NPT Discharge
- Fully adjustable automatic switch
- 10' Power supply cord
- Built-in thermal overload protection for safety
- Permanent split capacitor continuous duty motor
- 2.76 amps, 331 Watts
- 1800 RPM




PF92333

Motor Performance

- 1/3 HP 120 Volt AC (2.76 amps)

| Performance Chart | | | | | |
|-------------------|------|------|------|------|-----|
| Lift | 0' | 5' | 10' | 15' | 20' |
| GPM | 50 | 45 | 38 | 35 | 15 |
| GPH | 3000 | 2700 | 2280 | 2100 | 900 |

Product Specifications

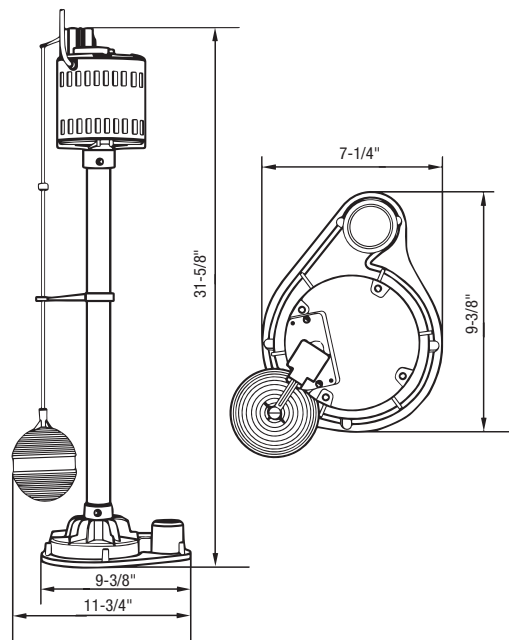

* All measurements are nominal. Please verify before actual installation.

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. This PROFLO sump pump carries a 3 year warranty when installed in residential applications. See owners manual for warranty details.

This PROFLO sump pump carries a 3 year limited warranty. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless it is agreed in writing to do otherwise.



PROFLO.COM