ΛFX

Decorative Nickel Cloud CN232/2U3/432

Features

Molded drop dish white acrylic diffuser with distinctive nickel trim ceiling mount fixture is available in three sizes, 12-1/8" x 49-3/4", 17-5/8"x 50" and 25-7/8" x 25-7/8". It can be used in various applications including corridors, kitchens and public spaces. This product offers a flush to ceiling frame and is retained to the fixture body with a clip on one end and screw on the other. The diffuser is captive in the frame. Fixture mounts to standard junction box (not included).

Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Decorative frame assembly is constructed of an extruded polymer with a brushed nickel Mylar finish. The entire frame attaches to the housing with a preinstalled bracket on one end and a #8 screw through the other end. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

Finish

Back plate is finished lighting grade white baked gloss enamel paint. Frame exterior is brushed nickel Mylar.

Diffuser

Acrylic diffuser is .080" thick smooth white.

Electrical

This unit can be ordered in the following options: with UL listed instant-start, electronic normal power factor ballast; 120V 60Hz AC (R8 suffix), 120-277 Universal 50/60Hz AC (MV suffix).

Lamping

For use with 2/32 or 4/32 watt T8 linear fluorescent lamps or 2/32 watt T8 U lamps with 6" spacing; supplied by others.


Certification

All fixtures are cULus listed for damp locations.


Options (consult factory)

120-277V HPF Dimming

Specifications and dimensions subject to change without notice.

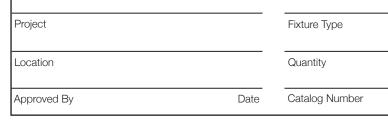



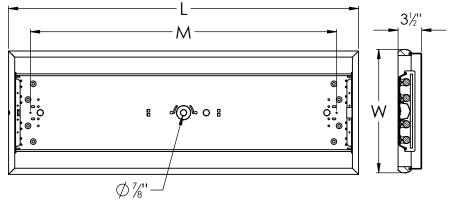

Ordering Information:

Model No.			Lamps		Dimens	ions	Mounting	
<u>Finish</u>	120V	120-277V	Qty	Lamp	Н	W	L	Μ
Satin Nickel	CN232R8	CN232MV	2	F32T8	3-1/2"	12-1/2"	50"	43-3/4"
Satin Nickel	CN2U3R8	CN2U3MV	2	FB32T8	3-1/2"	25-7/8"	25-7/8"	21"
Satin Nickel	CN432R8	CN432MV	4	F32T8	3-1/2"	17-5/8"	50"	43-3/4"