



Highline® Pressure Lite® Toilet K-3519

Features

- Vitreous china.
- Elongated bowl
- Equipped with Sloan FLUSHMATE®— Sloan® Valve Company.
- Polished chrome trip lever.
- Less seat and supply.
- 12" (305 mm) rough-in.
- 1.0 gpf (3.8 lpf).
- 2-1/4" (57 mm) glazed trapway.
- 11-1/2" (292 mm) x 9-1/2" (241 mm) water area.
- 30-1/8" (765 mm) x 21-1/4" (540 mm) x 31-1/4" (794 mm).

Recommended Accessories

K- 4650 Toilet Seat

4664

K- 7637 Angle Supply with Stop (single)

Components

Product includes:

K- 4304 Toilet Bowl

K- 4484 Toilet Tank

Additional included component/s: Tank cover, and Trip lever.



ADA

CSA B651

OBC

Codes/Standards

ASME A112.19.2/CSA B45.1

DOE - Energy Policy Act 1992

EPA WaterSense®

ADA

ICC/ANSI A117.1

CSA B651





OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|--|------|--------------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 47 | Almond |
|  | 7 | Black Black™ |


USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

3-27-2016 05:58

THE BOLD LOOK
OF **KOHLER®**

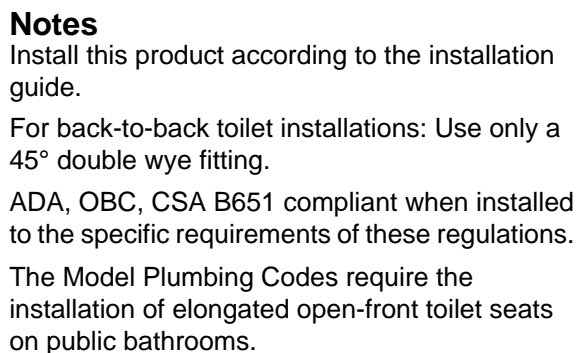

| | |
|-----------------------|------------------------------------|
| Toilet type: | Two-piece |
| Bowl shape: | Elongated front |
| Flush type: | Pressure Assisted |
| Trap passageway: | 2-1/4" (57 mm) |
| Water surface size: | 11-1/2" x 9-1/2" (292 mm x 241 mm) |
| Rim to water surface: | 5-3/4" (146 mm) |
| Rough-in: | 12" (305 mm) |
| Seat-mounting holes: | 5-1/2" (140 mm) |

Min static pressure: 35 psi (241.3 kPa)
Max static pressure: 80 psi (551.6 kPa)