

### Features

- Brass construction.
- Dual control wall-mounted.
- Stationary spout.
- Less drain.
- 11-1/4" (286 mm) spout reach.
- ADA compliant traditional lever handles.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)].

### Required Accessories

K- 410-K Wall-mount Valve

### Optional Accessories

K- 7107 Decorative Drain  
K- 7108 Decorative Drain  
K- 7114 Pop-Up Drain  
K- 7124 Pop-Up Clicker Drain  
K- 7127 Drain  
K- 7129 Drain



ADA

### Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF 61  
NSF 372  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
ADA  
ICC/ANSI A117.1  
All applicable US Federal and State material regulations


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	AF	Vibrant® French Gold
	PB	Vibrant® Polished Brass
	G	Brushed Chrome
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BX	Vibrant® Brazen Bronze
	CB	Polished Chrome with Vibrant® Polished Brass Accents

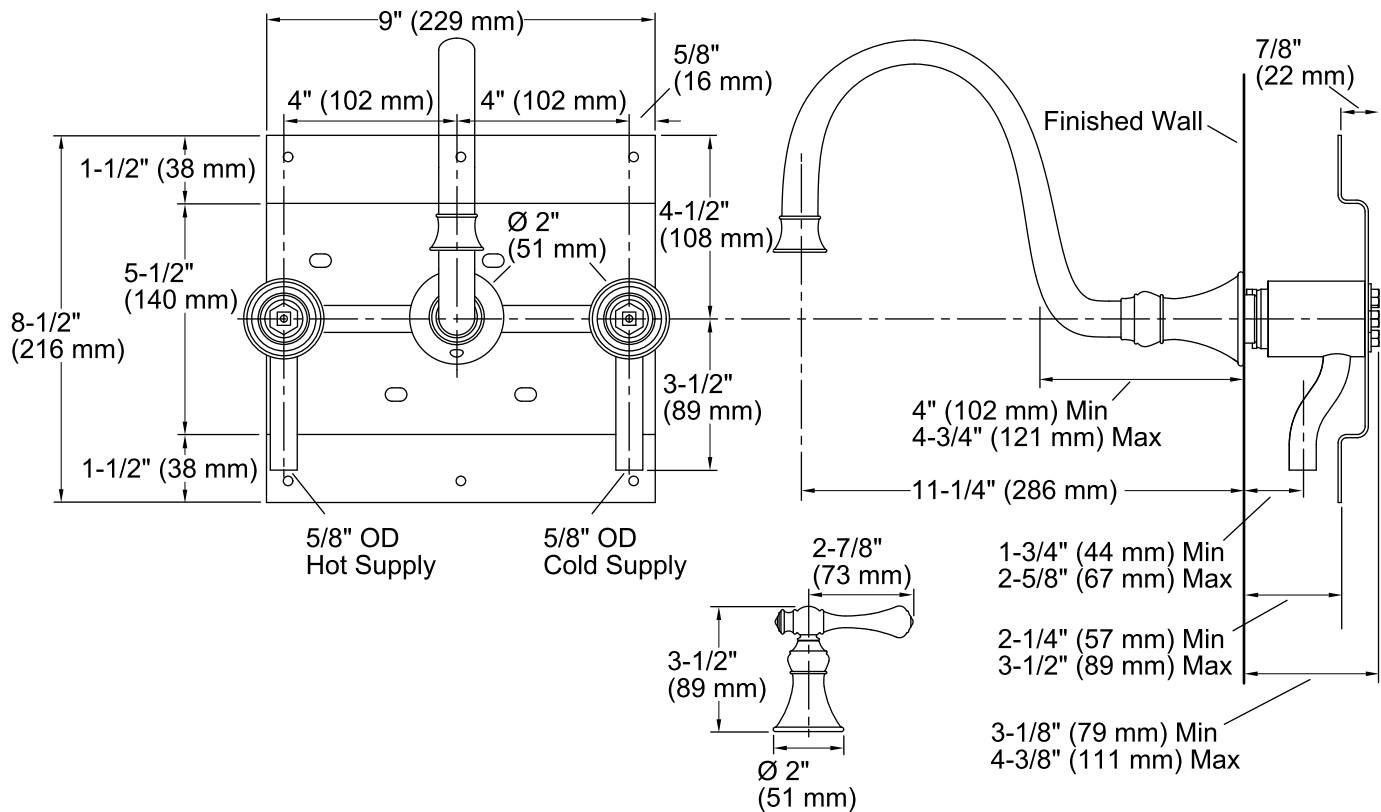

## Technical Information

All product dimensions are nominal.

Spout reach: 11-1/4" (286 mm)

## Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

## Notes

Install this product according to the installation guide.

Three 1-1/2" (38 mm) diameter cutout holes are required for the spout and handles.

A minimum of 1-1/2" (38 mm) to 6" (152 mm) clearance space must be maintained between bottom of spout and top of the fixture rim.

ADA compliant when installed to the specific requirements of these regulations.