



CO-200-RX-4
Tag: _____

Floor Cleanout with Ductile Iron Top

SPECIFICATION: Watts Drainage CO-200-RX-4 epoxy coated cast iron floor cleanout with 5" (127) round adjustable gasketed heavy duty ductile iron top, removable gas tight gasketed brass cleanout plug, and no hub (standard) outlet.

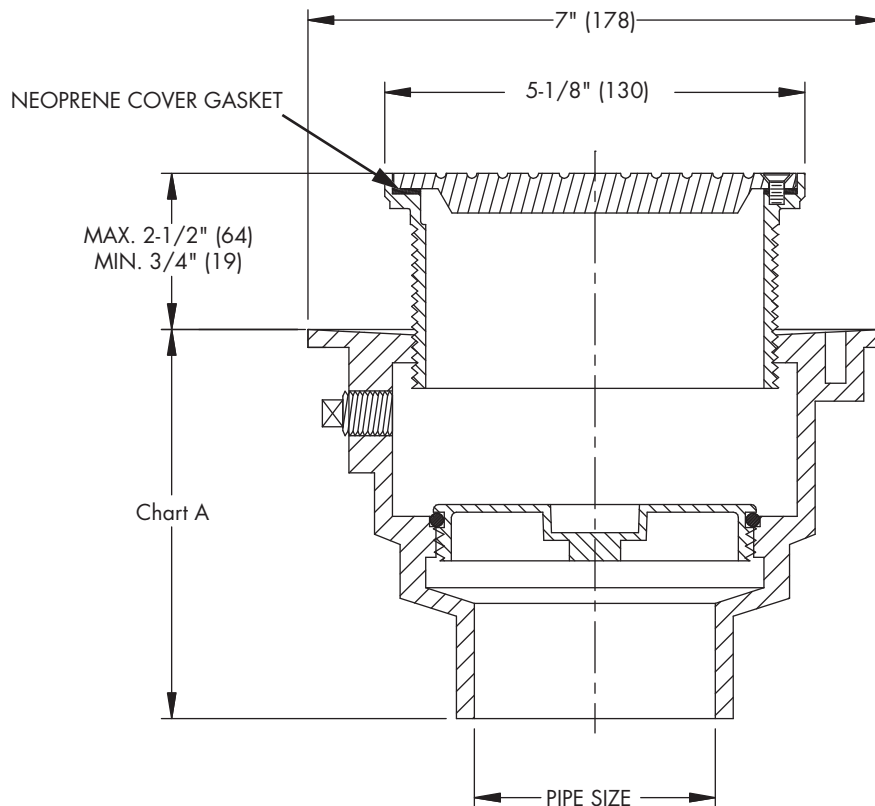


Chart A

	NH(MJ)	P	60/61
Pipe Size	No Hub	Push On	PVC/ABS
2"	4-1/2" (114)	5-1/2" (140)	4" (102)
3"	4-1/2" (114)	5-1/2" (140)	4" (102)
4"	4-3/4" (121)	5-1/2" (140)	4" (102)

Load
Rating

*XHD

* The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:
XHD - Safe Live Load 7500-10000 lbs.(3375-4500kg)
The above categories are given as a guide only.
Please consult factory.

Components



Pipe Sizing (Select One)

Suffix	Description	
2	2" (51) Pipe Size	☐
3	3" (76) Pipe Size	☐
4	4" (102) Pipe Size	☐

Outlet Type (Select One)

Suffix	Description	
NH	No Hub (MJ)	☐
P	Push On	☐
X	Inside Caulk	☐

Options (Select One or More)

Suffix	Description	
-C	Membrane Clamp	☐
-6	Vandal Proof	☐
-13	Galvanized Body	☐
-US	Buy American Compliant	☐

Optional Body Material

Suffix	Description	
-60	PVC Body w/Poly Plug	☐
-61	ABS Body w/Poly Plug	☐

Job Name _____ Contractor _____

Job Location _____ Contractor's P.O. No. _____

Engineer _____ Representative _____

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



Specification Drainage Products

USA: 100 Watts Road, Spindale, NC, 28160-2298; TEL: 828-288-2179 TOLL-FREE: 1-800-338-2581 www.watts.com