

F-2885-FP 2 1/2"-8"


NEW YORK CITY BOARD OF STANDARDS and APPROVAL

Approvals: U.L. Listed, F.M.,
N.Y.C. B.S.A. No. 278-90-SM



Iron Gate Valve
175 WOG †

OS & Y • Solid Wedge Disc
Bolted Bonnet • Flanged Ends

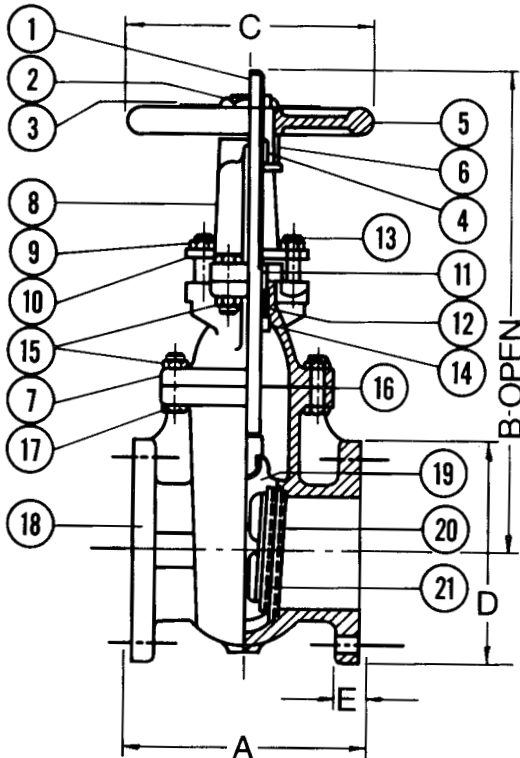

MATERIAL LIST

No.	PART	MATERIAL	SPECIFICATION
1	Stem	Silicon Brass	1 ASTM B98
2	Handwheel Nut	Ductile Iron	ASTM A636
3	Name Plate	Aluminum	
4	Yoke Bushing	Brass	ASTM B16
5	Handwheel	Cast Iron	ASTM A126, Class B
6 ²	Yoke Bushing Nut	Cast Iron	ASTM A126, Class B
7 ³	Bonnet	Cast Iron	ASTM A126, Class B
8 ³	Yoke	Cast Iron	ASTM A126, Class B
9	Gland Follower Nut	Steel	ASTM A563
10	Gland Follower	Ductile Iron	ASTM A536
11	Packing Gland	Brass	ASTM B16
12	Packing	Graphite	
13	Gland Follower Bolt	Steel	ASTM A307-B
14	Backseat Bushing	Brass	ASTM B16
15	Nut	Steel	ASTM A563
16	Body Gasket	Graphite	
17	Bolt	Steel	ASTM A 307-B
18	Body	Cast Iron	ASTM A126, Class B
19	Wedge	Cast Iron	ASTM A126, Class B
20	Seat Ring	Cast Bronze	ASTM B62
21	Wedge Face Ring	Cast Bronze	ASTM B62

¹ 8" is Brass ASTM B-16

² Sizes 2 1/2" to 6" inch only.

³ Sizes 2 1/2" and 3" made with yoke integral with bonnet.
Sizes 4" through 8" made with separate yoke bolted to bonnet.

DIMENSIONS - INCHES/MILLIMETERS

Units	Size	A	B	C	D	E	C _v
Inches mm	2 1/2	7.50 191	16.00 406	7.00 178	7.00 178	0.69 17	335
Inches mm	3	8.00 203	18.50 470	7.50 191	7.50 191	0.75 19	510
Inches mm	4	9.00 229	22.25 565	8.00 203	9.00 229	0.94 24	945
Inches mm	6	10.50 267	30.50 775	11.75 298	11.00 279	1.00 25	2250
Inches mm	8	11.50 292	38.38 975	13.50 343	13.50 343	1.13 29	4150

INNOVATION IN EVERY VALVE

The information presented on this sheet is correct at time of publication. Milwaukee Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to www.milwaukeevalve.com. ⚠ State of California Prop 65
WARNING: Cancer and Reproductive Harm. For more information visit www.p65warnings.ca.gov.



MILWAUKEE VALVE