

PF92010




# Vertical Float Switch

## Product Features

- For use with sump & utility pumps
- 10ft cord with piggyback plug
- 120 Volts AC
- Max pump running current: 10 amps
- Includes stainless steel mounting bracket and clamp
- Adjustable pumping range of .75 to 6.5 inches
- Flexible 18 gauge cable, 2 conductor (UL, CSA) SJTOW, SJTW
- Injection molded acetal plastic lift rod guide
- Neoprene float stop
- Switch and float housing made from high impact, corrosion resistant, PVC for use in non-potable water temperatures up to 125°F
- Overall dimensions: 12" L x 5" W x 3" D
- Switch housing dimensions: 2" H x 2.8" Diameter
- Float dimensions: 2.5" H x 2.7" Diameter



PF92010

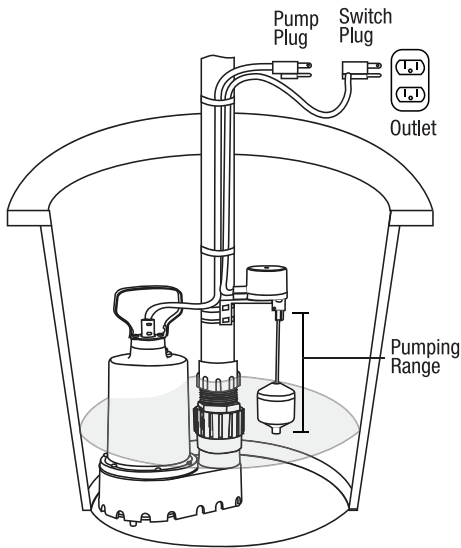

\* All measurements are nominal. Please verify before actual installation.

## Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. This PROFLO float switch carries a 1 year warranty when installed in residential applications. See owners manual for warranty details.

This PROFLO float switch carries a year limited warranty. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless it is agreed in writing to do otherwise.

Distributed Exclusively by Ferguson and Wolseley Canada  
© 2017 Ferguson Enterprises, Inc.



342876 06/17