



UPS 80-80/4, 3 ph, 208-230 V, 60 Hz

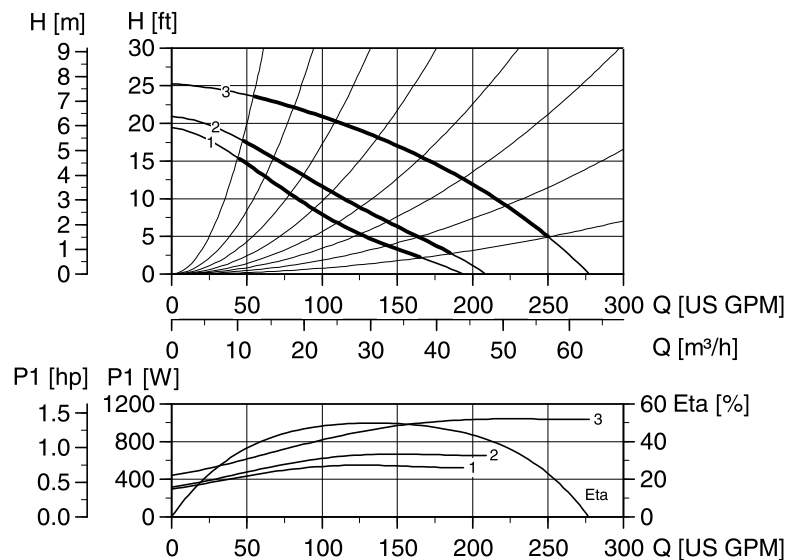

Flow range:	30 - 260 gpm
Head range:	1 - 25 ft
Motor:	4-pole 1.50 Hp
Max. liquid temp (Open):	+140 °F
Max. liquid temp.:	+248 °F
Min. liquid temp.:	+32 °F
Max. system pressure:	145 psi
Net wt:	89.7 lbs (40.7 kg)
Gross wt.:	102.1 lbs (46.3 kg)
Shipping volume:	2.90 ft ³ (0.082 m ³)
Net wt. bronze:	102.3 lbs (46.4 kg)
Gross wt. bronze:	114.6 lbs (52.0 kg)
Shipping volume bronze:	2.90 ft ³ (0.082 m ³)

Note: ETA is calculated as wire-to-water efficiency.

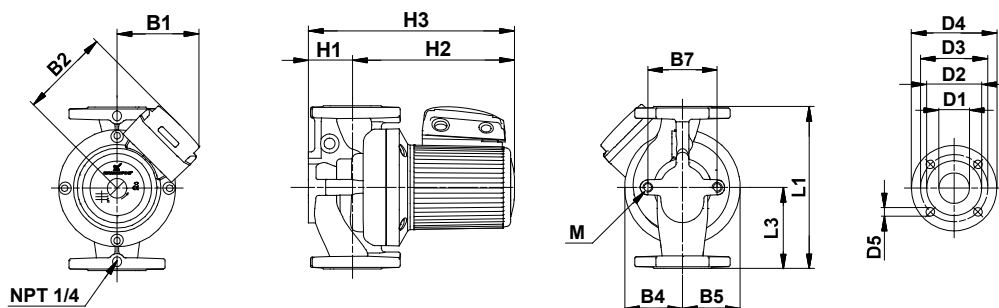

Dimensions

Model	L1	L3	B1	B2	B4	B5	B7	H1	H2	H3	D1	D2	D3	D4	D5	D6	D7	M
	[in]	19.00	9.50	5.75	6.68	4.94	3.94	6.31	3.81	11.25	15.15	3.19	5.00	6.00	7.56	0.75	—	—
	[mm]	483	241	146	170	125	100	160	97	286	385	81	127	152	192	19	—	—

Product numbers

Model type	Product number		Voltage [V]
	Cast Iron	Bronze	
UPS 80-80/4 (3 ph)	96402908	96402913	208-230

Connections

Flange size	Flange type
3" ANSI 125# R.F.	GF80

Electrical data

Speed	Max amps [A]	P Max [Watts]	Start amps [A]
	230V		230V
3	3.60	1050	11.80
2	2.08	660	6.82
1	1.72	550	5.64