



UPS 32-40/4, 3 ph, 208-230 V, 460 V, 575 V★, 60 Hz

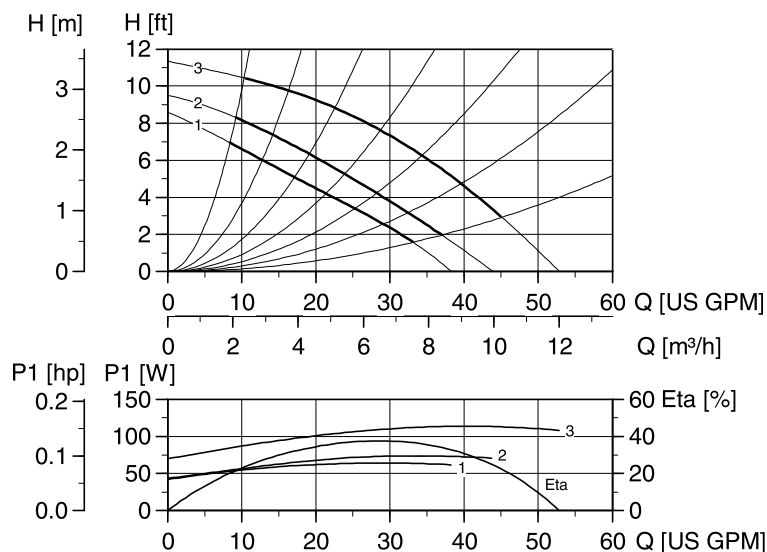

Flow range:	9 - 52 gpm
Head range:	1 - 11 ft
Motor:	4-pole 0.33 Hp
Max. liquid temp (Open):	+140 °F
Max. liquid temp.:	+248 °F
Min. liquid temp.:	+32 °F
Max. system pressure:	145 psi
Net wt:	35.9 lbs (16.3 kg)
Gross wt.:	43.4 lbs (19.7 kg)
Shipping volume:	1.70 ft³ (0.048 m³)
Net wt. bronze:	39.2 lbs (17.8 kg)
Gross wt. bronze:	46.7 lbs (21.2 kg)
Shipping volume bronze:	1.70 ft³ (0.048 m³)

Note: ETA is calculated as wire-to-water efficiency.

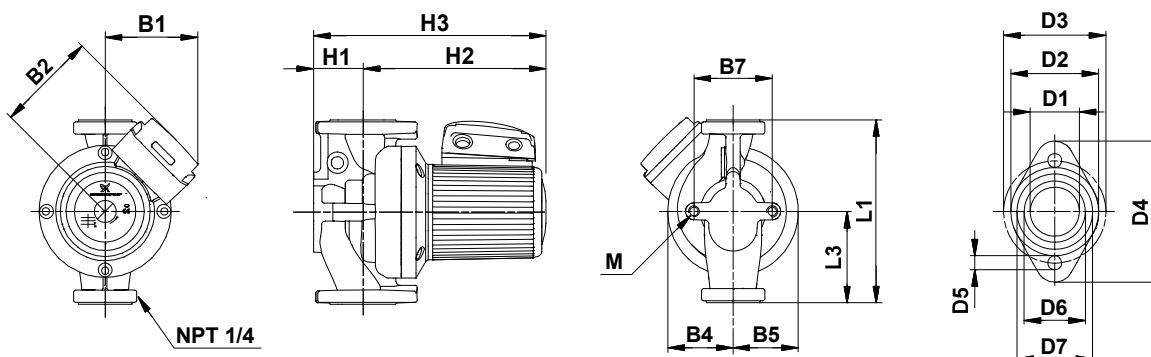

Dimensions

Model		L1	L3	B1	B2	B4	B5	B7	H1	H2	H3	D1	D2	D3	D4	D5	D6	D7	M
UPS 32-40/4	[in]	11.00	5.50	5.31	5.56	3.00	3.00	3.19	2.69	9.50	12.24	1.44	2.56	3.14	4.63	0.50	1.81	2.25	
	[mm]	279	140	135	141	76	76	81	68	241	311	37	65	80	117	13	46	57	M12

Product numbers

Model type	Product number		Voltage [V]
	Cast Iron	Bronze	
UPS 32-40/4 (3 ph)	96402696	96402701	208-230
	96402697	96402702	460
	96402698	96402703	575★

Connections

Flange size	Flange type
1.25" non ANSI 2 bolt w/ (2) 0.5" dia. holes	GF 15/26

Electrical data

Speed	Max amps [A]			P Max [Watts]	Start amps [A]		
	208-230V	460V	575V★		208-230V	460V	575V★
3	0.56	0.28	0.22	115	1.60	0.82	0.66
2	0.26	0.13	0.10	75	0.74	0.38	0.30
1	0.24	▲	▲	65	0.69	▲	▲

▲ All 3-phase, 460V and 575V pumps are 2-speed only.
★ Canada only.