



UPS 50-40/4, 1 ph, 115 V, 230 V, 60 Hz

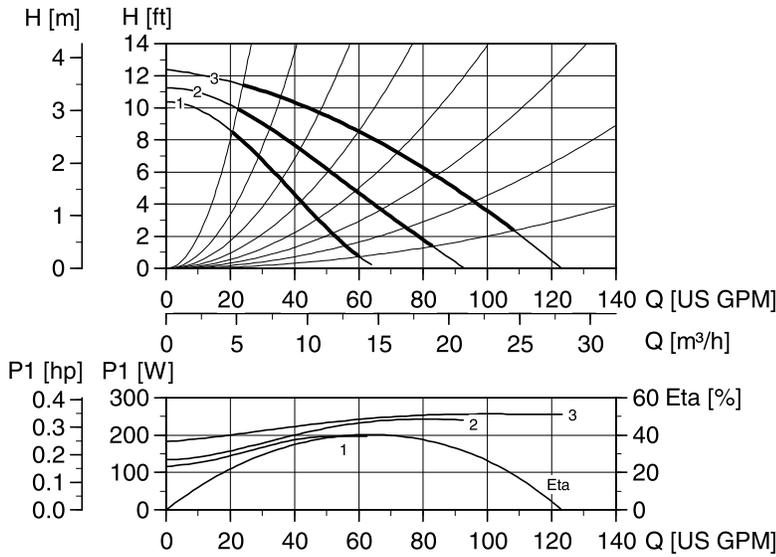

TM00 9518 0307

- Flow range: 20 - 125 gpm
- Head range: 1 - 12 ft
- Motor: 4-pole 0.33 Hp
- Max. liquid temp (Open): +140 °F
- Max. liquid temp.: +248 °F
- Min. liquid temp.: +32 °F
- Max. system pressure: 145 psi
- Net wt: 43.7 lbs (19.8 kg)
- Gross wt.: 51.8 lbs (23.5 kg)
- Shipping volume: 2.90 ft³ (0.082 m³)
- Net wt. bronze: 53.6 lbs (24.3 kg)
- Gross wt. bronze: 61.7 lbs (28.0 kg)
- Shipping volume bronze: 2.90 ft³ (0.082 m³)

Note: ETA is calculated as wire-to-water efficiency.

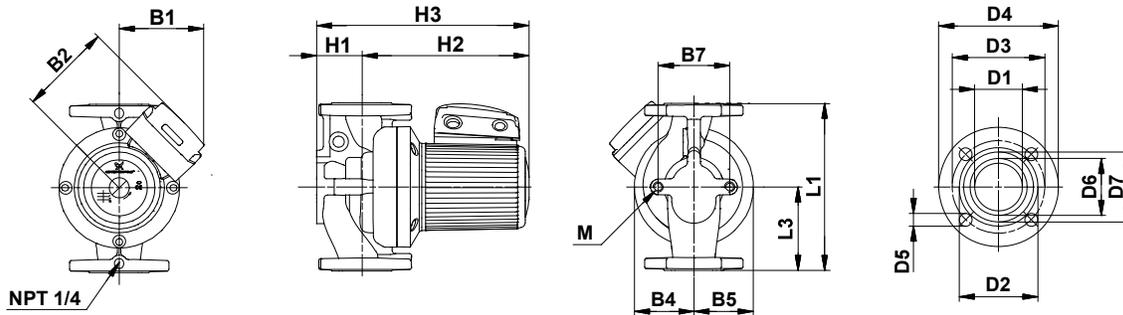

TM02 0730 5100

Dimensions

Model	L1	L3	B1	B2	B4	B5	B7	H1	H2	H3	D1	D2	D3	D4	D5	D6	D7	M
UPS 50-40/4	[in]	14.00	7.00	5.31	5.56	3.56	3.00	4.75	3.25	10.13	13.08	2.13	3.44	4.05	5.25	0.55	2.50	3.06
	[mm]	356	178	135	141	90	76	121	83	257	332	54	87	103	133	14	64	78

Product numbers

Model type	Product number		Voltage [V]
	Cast Iron	Bronze	
UPS 50-40/4 (1 ph)	96402814	96402819	115
	96402815	96402820	230

Connections

Flange size	Flange type
2" non ANSI 4 bolt w/ (4) 0.56" dia. holes	GF 50

Electrical data

Speed	Max amps [A]		P Max [Watts]	Start amps [A]	
	115V	230V		115V	230V
3	2.66	1.32	285	5.20	2.60
2	2.60	1.30	244	5.08	2.56
1	2.20	1.10	204	4.30	2.17