



UPS 50-40/4, 3 ph, 208-230 V, 460 V, 575 V★, 60 Hz

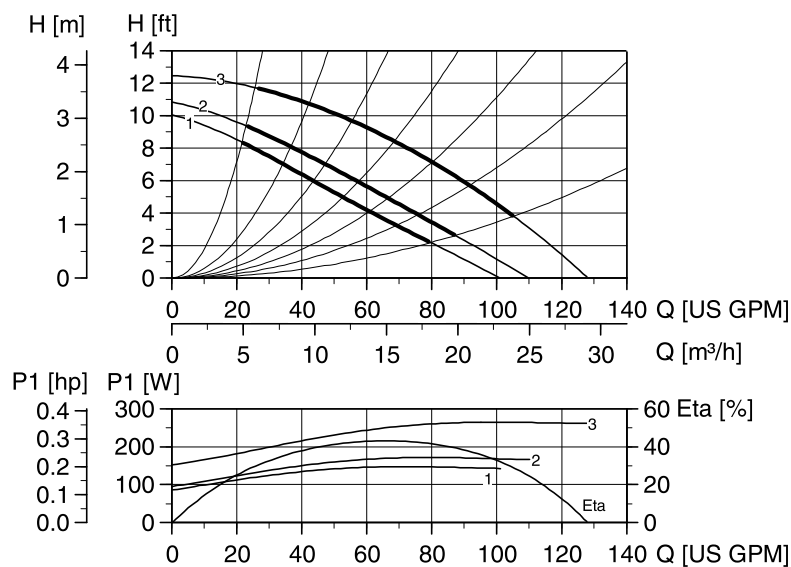

TM00 9501 0307

Note: ETA is calculated as wire-to-water efficiency.

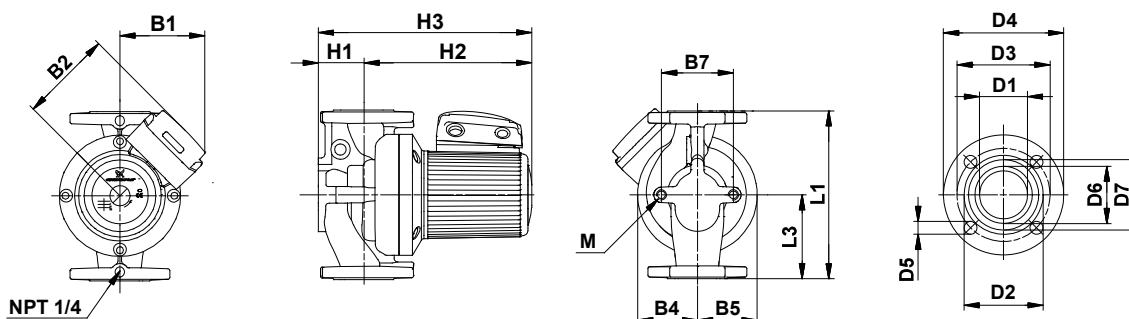

TM02 0730 5100

Dimensions

Model		L1	L3	B1	B2	B4	B5	B7	H1	H2	H3	D1	D2	D3	D4	D5	D6	D7	M
UPS 50-40/4	[in]	14.00	7.00	5.31	5.56	3.56	3.00	4.75	3.25	10.13	13.08	2.13	3.44	4.05	5.25	0.55	2.50	3.06	
	[mm]	356	178	135	141	90	76	121	83	257	332	54	87	103	133	14	64	78	M12

Product numbers

Model type	Product number		Voltage [V]
	Cast Iron	Bronze	
UPS 50-40/4 (3 ph)	96402816	96402821	208-230
	96402817	96402822	460
	96402818	96402823	575★

Connections

Flange size	Flange type
1" non ANSI 4 bolt w/ (4) 0.56" dia. holes	GF 50

Electrical data

Speed	Max amps [A]			P Max [Watts]	Start amps [A]		
	208-230V	460V	575V★		208-230V	460V	575V★
3	1.40	0.70	0.56	270	4.60	2.30	1.84
2	0.66	0.33	0.26	170	2.17	1.08	0.86
1	0.54	▲	▲	150	1.77	▲	▲

▲ All 3-phase, 460V and 575V pumps are 2-speed only.
★ Canada only.