

Anti-Seep Collars

Keep your pipe from being washed out.

- ◆ The Anti-Seep Collar works with any smoothwall pipe or corrugated plastic tubing.
- ◆ 1/16" gum rubber.
- ◆ Easy to install.
- ◆ Tan floating stock has superior resilience, elongation, and tear strength.
- ◆ Resistant to water, most salts, mild acids, and many other chemicals.
- ◆ Wood frame.
- ◆ Economical to buy.


Anti-Seep Flanges— 1/16" Gum Rubber with Wood Frame

ASC02	2' x 2'
ASC03	3' x 3'
ASC04	4' x 4'
ASC05	5' x 5'
ASC06	6' x 6'



Recommended Anti-Seep Collar

Pipe Size	Item#
3"	ASC02
4", 5", 6", 8", 10", 12"	ASC03
15", 18", 24"	ASC04
30", 36"	ASC05
42", 48", 60"	ASC06

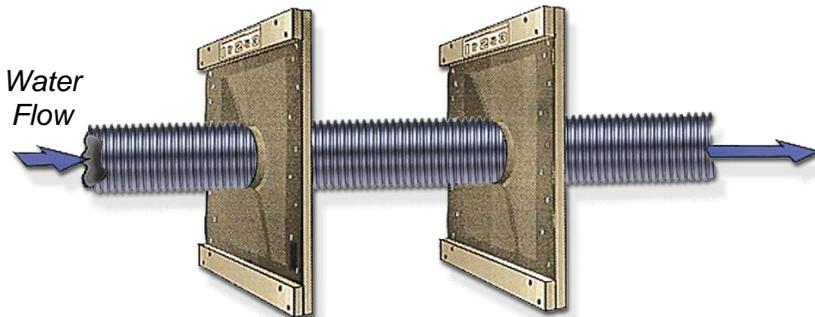

Directions for Using The Anti-Seep Collar

1. Unroll Anti-Seep Collar and align boards to form a square. Attach metal brackets to corner of the boards with screws provided. Attach rubber to frame with nails provided.
2. ***IMPORTANT—Cut a round hole** in the center of rubber that is smaller than pipe size (approx. 33% smaller). This will allow rubber to stretch over pipe when Anti-Seep Collar is installed on pipe. This will provide a tight seal between pipe and Anti-Seep Collar.
***Cutting an "X" or slit will cause the rubber to tear.**
3. Slip pipe through Anti-Seep Collar, inspect seal between pipe and Anti-Seep Collar, carefully backfill, and compact with suitable soil.

CAUTION: Excessive compaction or downward pressure on wooden frame will cause rubber to stretch and distort resulting in loss of seal between rubber and pipe.

Physical Properties:

Tensile: 3000
 Elongation: 600
 Temperature: -20 F to 140 F
 Smooth Finish

Specifications:

ASTM D2000
 SAE J200
 1AA 430

Instructions come with each collar.