



SYMMONS

Location:

Temptrol® Commercial



C-96-500-B30-V-X, C-96-500-B30-V-TRM & C96500B30TRMTC

Shower/Hand Shower System & Trim

Specification Submittal

Model Numbers	Feature Highlights
<input type="checkbox"/> C-96-500-B30-V-X Shower/Hand Shower System with Temptrol Pressure Balancing Tub/Shower Valve and Symmons Dual Outlet Diverter Valve <input type="checkbox"/> C-96-500-B30-V-TRM Shower/Hand Shower Trim, Temptrol Pressure Balancing Tub/Shower Valve and Symmons Dual Outlet Diverter valve ordered separately <input type="checkbox"/> C96500B30TRMTC Shower/Hand Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap	<ul style="list-style-type: none"> • Temptrol Commercial Shower/Hand Shower System or Trim • Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with C-96-500-B30-V-X) • Requires Symmons Dual Outlet Diverter Valve (included with C-96-500-B30-V-X) • Integral service stops allow water shutoff at valve for service (included with C-96-500-B30-V-X) • Adjustable stop screw to limit hand turn (included with C-96-500-B30-V-X) • Metal lever handles • Dual checks for backflow protection • 30" slide bar for hand shower • 60" flexible metal hose • 1 mode showerhead • 1 mode hand shower • 2.0 gpm (7.6 L/min) flow restrictor • Tub spout not included • Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish • Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n C96500B30TRMTC)
Options/ Modifications	Compliance
<input type="checkbox"/> 1.5 1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> Delete Suffix X Less integral service stops <input type="checkbox"/> VP Vandal resistant escutcheon screws in place of standard screws <input type="checkbox"/> 72 72" hose in place of 60" hose <input type="checkbox"/> 295 Institutional Showerhead #4-295 <input type="checkbox"/> X-CHKS Integral check stops - for use in installations where a positive shutoff device is used downstream of mixing valve <input type="checkbox"/> 135 4-135 Showerhead <input type="checkbox"/> L1 Less showerhead (head only) <input type="checkbox"/> L2 Less hand shower (wand only) <input type="checkbox"/> L3 Less showerhead & hand shower wand <input type="checkbox"/> L5 Less hand shower system (less bar/ cradle, hose, wand and elbow) <input type="checkbox"/> L7 Less handle <input type="checkbox"/> LP Loop handle <input type="checkbox"/> NS Non-shared diverter valve <input type="checkbox"/> B48 48 inch slide bar in place of 30 inch bar Note: Append appropriate -suffix to model number.	<p>- ASME A112.18.1/CSA B125.1</p> 
	Warranty
	<p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 

Architectural/ Engineering Specification


Symmons Temptrol and Commercial Shower and Hand Shower System or Trim _____ Includes Temptrol Commercial Shower/Hand Shower System or Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with C-96-500-B30-V-X), Requires Symmons Dual Outlet Diverter Valve (included with C-96-500-B30-V-X), Integral service stops allow water shutoff at valve for service (included with C-96-500-B30-V-X), Adjustable stop screw to limit hand turn (included with C-96-500-B30-V-X), Metal lever handles, Dual checks for backflow protection, 30" slide bar for hand shower, 60" flexible metal hose, 1 mode showerhead, 1 mode hand shower, 2.0 gpm (7.6 L/min) flow restrictor, Tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n C96500B30TRMTC). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "Delete Suffix X - Less integral service stops", "VP - Vandal resistant escutcheon screws in place of standard screws", "72 - 72" hose in place of 60" hose", "295 - Institutional Showerhead #4-295", "X-CHKS - Integral check stops - for use in installations where a positive shutoff device is used downstream of mixing valve", "135 - 4-135 Showerhead", "L1 - Less showerhead (head only)", "L2 - Less hand shower (wand only)", "L3 - Less showerhead & hand shower wand", "L5 - Less hand shower system (less bar/ cradle, hose, wand and elbow)", "L7 - Less handle", "LP - Loop handle", "NS - Non-shared diverter valve", "B48 - 48 inch slide bar in place of 30 inch bar".



SYMMONS® Temptrol® Commercial

C-96-500-B30-V-X, C-96-500-B30-V-TRM & C96500B30TRMTC

Dimensions

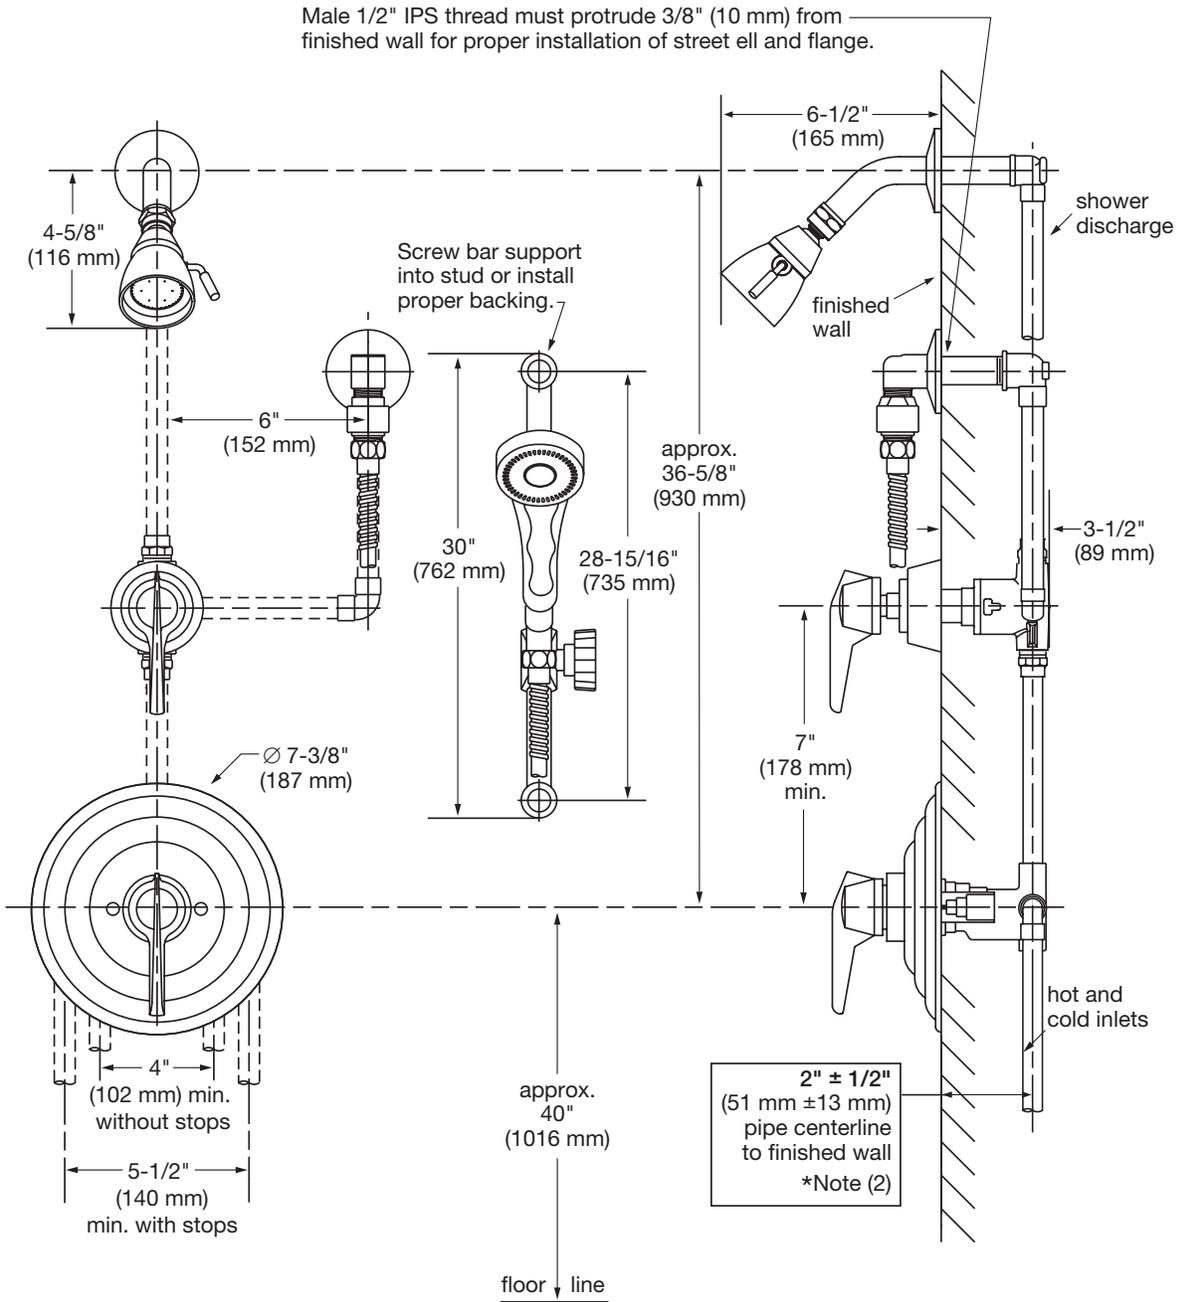

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.