



Shower Valve Thermostatic Mixing Valves

- Durable construction from brass and stainless steel
- Reliable wax-filled thermostat
- Responds to changes of incoming temperature
- ASSE 1016, Type T listed
- Check stops on inlets
- Adjustable set point within temperature range
- Easy installation and serviceability
- Dirt and lime resistant
- Factory assembled and tested
- Standard NPT plumbing

Specification

Thermostatic water mixing valve shall consist of a piston control mechanism with positive shut-off of hot water when cold water supply is lost. Construction shall be bronze body and cap with replaceable corrosion resistant components, including stainless steel piston and liner. Valve shall be certified to ASSE 1016, Type T. Thermostatic valve shall be Bradley Model S59-2005.

Valve Specifications

Maximum Operating Pressure

125 PSI (860 kPa)

Maximum Inlet Temperature

180° F (82° C)

Temperature Range*

Std. Cold to 110° F (43° C)

Set Point

110° F (43° C)

Flow Capacities – GPM (L/Min)

Model	Min Flow	Pressure Drop – PSI (Bar)						
		5 (0.5)	10 (1.0)	15 (1.5)	20 (2.0)	30 (2.5)	45 (3.0)	60 (4.0)
S 5 9 - 2 0 0 5 Suffix TMV	0.5 (2.0)	1.5 (6.0)	2.0 (8.0)	2.25 (10.0)	2.5 (11.5)	3.0 (13.0)	4.0 (14.5)	4.5 (16.5)

* Temperature range is based on a hot water inlet of at least 130° F (54° C).
Exact temperature range may vary slightly.

Product Compliance

Listed by IAPMO R&T to


- ASSE 1016-2017/ASME A112.1016-2017/CSA B125.16-17
- Uniform Plumbing Code (UPC)
- National Plumbing Code of Canada
- International Plumbing Code (IPC)

Listed by ASSE International to

- ASSE 1016



NAVIGATOR


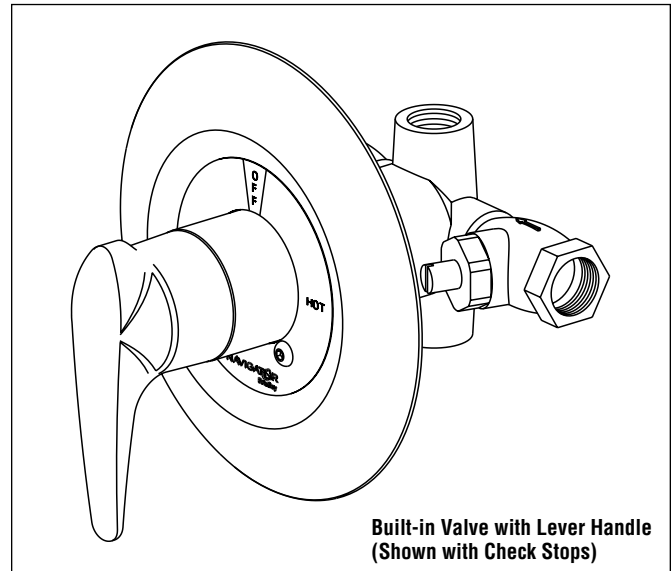


**Built-in Valve with Lever Handle
(Shown with Check Stops)**

Dimensions

(mm)

4½" (114) Diameter Wall Opening Required

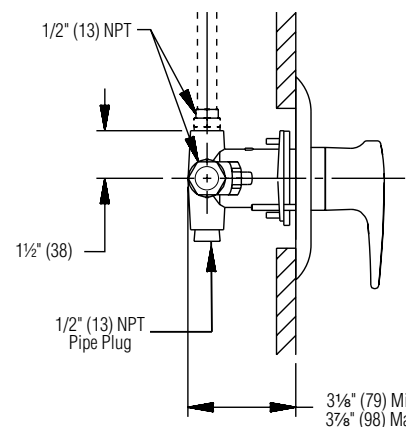

3½" (79) Min.

3¾" (98) Max.

Engineer's Approval _____

Page 1 of 1

1/20/2021

[View Latest Version](#)

This information is subject to change without notice.

Bradley_TMV_PointOfUse_S59-2005

© 2021 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com