

DWV PIPE HANGER

» 510 SERIES

SPECIFICATION

Sioux Chief's 510 series DWV Pipe hanger shall be used where necessary to secure Schedule 40 DWV piping in accordance with all local and national codes. Hanger shall be of galvanized steel material to resist rust. Vinyl-coated option shall be available for use on plastic pipe to isolate and prevent direct contact with metal hanger. Hanger shall have a 12" stem length to the top of the pipe loop. Hanger stem shall have alternating hole sizes.

INSTALLATION

Secure hanger stem to joist with nail or screw. Wrap loop around pipe. Tighten locking screw once pipe is installed to secure pipe in place. Be sure to follow code requirements on proper pipe slope.

MATERIALS

Hanger: galvanized steel

Vinyl: Plastisol

Screw: #12-11 x 1-3/8" combo self-tapping with bunt point

MAXIMUM LOAD RATING

150 lbs.

DIMENSIONS

Gauge:

DWV Pipe Size	1-1/2"	2"	3"	4"
Galvanized	18	18	16	16
Vinyl-Dipped	18	18	16	16

Width:

DWV Pipe Size	1-1/2"	2"	3"	4"
Galvanized	3/4"	3/4"	3/4"	3/4"
Vinyl-Dipped	1"	1"	1"	1"

A: stem length	12"	12"	12"	12"
B: large hole	0.275"	0.275"	0.275"	0.275"
C: small hole	0.188"	0.188"	0.188"	0.188"
D: centerline	0.86"	0.86"	0.86"	0.86"


ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG



510-9PK



510-9VPK

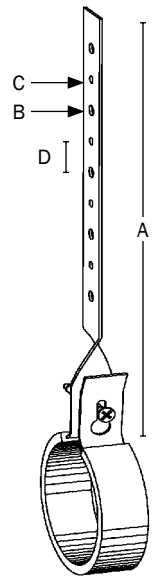

MADE IN USA

Create Item Number

510-AB

e.g. 510-8VPK: 3" vinyl-coated DWV pipe hanger

DWV PIPE SIZE A

6 = 1 1/2"

7 = 2"

8 = 3"

9 = 4"

FINISH B

PK = galvanized steel

VPK = vinyl-coated galvanized