


Hose Bibbs

125 lb. CWP to 100°F

Maximum Temperature 180°F

QUARTER TURN HOSE BIBBS MATERIALS LIST


PART	SPECIFICATION
Screw	Steel
I.D. Tag	Aluminum
Handle	Zinc
Stem	Brass ASTM B 16 UNS C36000
O-Ring	Nitrile
Seat	PTFE
Ball	Brass ASTM B 16 UNS C36000
Adapter	Brass ASTM B 283 UNS C37700
Body	Brass ASTM B 283 UNS C37700

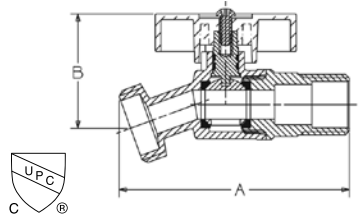

QT54X

DESCRIPTION	Nom. Size	DIMENSIONS		APPROX. NET WT.
		A	B	
NO-KINK HOSE BIBB Male or Cup to Hose	1/2	3.15"	1.54"	.40 lb
	3/4	3.15"	1.54"	.42 lb


IAPMO Listed to cUPC®

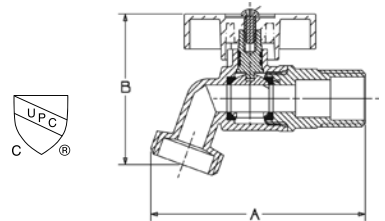

QT56X

DESCRIPTION	Nom. Size	DIMENSIONS		APPROX. NET WT.
		A	B	
HOSE BIBB Cup or Male to Hose Male Thread to Hose	1/2	3.15"	2.17"	.40 lb
	3/4	3.15"	2.14"	.42 lb


IAPMO Listed to cUPC®

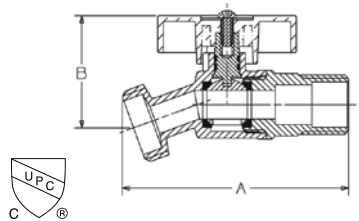

QT55X

DESCRIPTION	Nom. Size	DIMENSIONS		APPROX. NET WT.
		A	B	
NO-KINK HOSE BIBB FIP to Hose	1/2	2.87"	1.54"	.40 lb
	3/4	3.15"	1.54"	.45 lb

IAPMO Listed to cUPC®

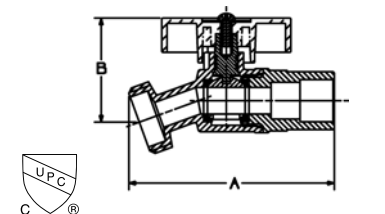

QT57X

DESCRIPTION	Nom. Size	DIMENSIONS		APPROX. NET WT.
		A	B	
NO-KINK HOSE BIBB 1/2 Cup or 3/4 Ftg. to Hose	1/2" or 3/4"	3.11"	1.54"	.42 lb

IAPMO Listed to cUPC®

NOT FOR USE WITH POTABLE DRINKING WATER APPLICATIONS AFTER JANUARY 3, 2014.