MOEN

Buy it for looks. Buy it for life.®

DESCRIPTION

- Metal construction with chrome, LifeShine[®] brushed nickel or oil rubbed bronze finish
- For installations from 8" (203mm) to 10" (254mm) centers
- Designed to be installed on decks up to 2-1/8" (54mm)
- The tub fill spout is a slip fit design and the supplies are 1/2" type K, copper tubing

OPERATION

- Lever style handles
- Can be installed with any Moen Deck Mounted Roman Tub Trim Kit
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

FLOW

- 1248 cartridge
- Designed to deliver 18 gpm at 40 psi (68 L/min).


CARTRIDGE

• Nonmetallic and stainless steel materials

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1,
- ICC A117.1 and all applicable requirements referenced therein. **WARRANTY**
- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations






BRANTFORD™ Garden Tub Trim Only

Models: T4943, T4943BN, T4943ORB

Valve: 4999, 64999, 4997, 64997

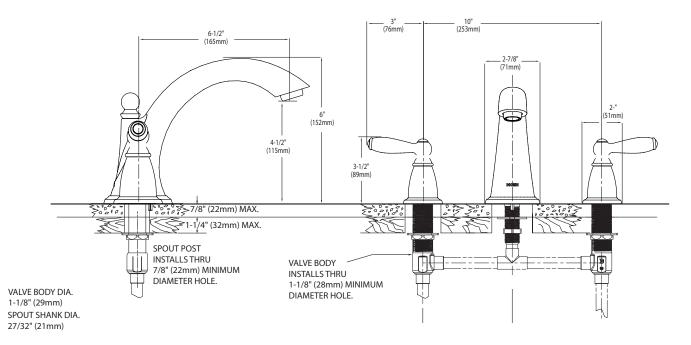

NOTE: THE INSTALLATION SHOWN IS FOR TILE DECKS, THIS VALVE WILL ALSO FIT STEEL, CAST IRON OR PLASTIC DECKS

CRITICAL DIMENSIONS

(DO NOT SCALE)