

Specifications

Buy it for looks. Buy it for life.®

DESCRIPTION

- Metal construction with chrome plated, LifeShine® brushed nickel, oil rubbed bronze or antique bronze finishes
- Designed to be installed through 2, 1-1/4" and 1, 1" min. dia holes 8" on center
- 1/2" copper connections
- Adaptable for non-8" centers

OPERATION

- Maximum handle rotation angle is 90° to full on for either handle
- Rotate hot side counterclockwise to open and clockwise to close
- Rotate cold side clockwise to open and counterclockwise to close

Flow

Aerator is limited to 2.2 gpm max (8.3 L/min)

CARTRIDGE

• 1224 cartridge design nonmetallic/nonferrous and stainless steel material

STANDARDS

When trim kit is added to M-Pact valve, the product is:

- Third party certified to ASME A112.18.1, ICC A117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act


WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- · 5 year warranty if used in commercial installations



Kingsley™ Two-Handle Wall Mount Faucet

Models: T6107, T6107BN, T6107ORB, T6107AZ

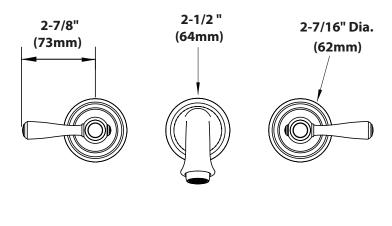





CRITICAL DIMENSIONS

MAX WALL THICKNESS 1-3/4" (45mm)

(DO NOT SCALE)