

HAND CARRY-OIL-LUBE COMPRESSORS



4 Gallon, 125 Max PSI, Stacked Tank Compressor



4 Gallon, 125 Max PSI, 4.0 scfm, Stacked Tank Compressor



4 Gallon, 125 Max PSI, Wheeled Dolly-Style Air Compressor with Panel

SPECIFICATIONS	D55151	D55153	D55154
Tank/Max PSI	4 Gallon / 125 PSI Max	4 Gallon / 125 PSI Max	4 Gallon / 125 PSI Max
SCFM@90 PSI	3.4 scfm	4.0 scfm	4.0 scfm
Pump Type	Direct Drive Oil-Lube	Direct Drive Oil-Lube	Direct Drive Oil-Lube
Amp Draw/Voltage	14A, 120V	14A, 120V	14A, 120V
Motor Type	Induction	Induction	Induction
HP	1.1 Continuous HP	1.1 Continuous HP	1.1 Continuous HP
Noise Level	83.0 dBA	83.0 dBA	83.0 dBA
Tool Length	18.5"	18.5"	22" -
Tool Width	15.5"	15.5"	18.5"
Tool Height	14.75"	14.75"	23"
Tool Weight	53 lbs	56 lbs	87 lbs
Includes	DeWALT compressor oil	DeWALT compressor oil	DeWALT compressor oil

WHEELED PORTABLE - OIL-FREE COMPRESSORS



4.5 Gallon, 200 Max PSI, Jobsite Compressor



15 Gallon, 200 Max PSI, Horizontal Workshop Compressor



15 Gallon, 200 Max PSI, Vertical Workshop Compressor

SPECIFICATIONS	D55146	D55167	D55168
Tank/Max PSI	4.5 Gallon / 200 PSI Max	15 Gallon / 200 PSI Max	15 Gallon / 200 PSI Max
SCFM@90 PSI	5.0 scfm	5.0 scfm	5.0 scfm
Pump Type	Belt Drive Oil-Free	Belt Drive Oil-Free	Belt Drive Oil-Free
Amp Draw/Voltage	15A, 120V	15A, 120V	15A, 120V
Motor Type	Universal	Universal	Universal
HP	1.6 Continuous HP	1.6 Continuous HP	1.6 Continuous HP
Noise Level	78.5 dBA	78.5 dBA	78.5 dBA
Tool Length	33.5"	39.6"	24.5"
Tool Width	23"	16.5"	22"
Tool Height	15"	30"	44.75"
Tool Weight	83 lbs	83 lbs	92 lbs

AIR DISTRIBUTION




QUADRAPORT[®] Air Line Splitter with Regulator & 1/4" Couplers



QUADRAPORT[®] Air Line Splitter with Regulator & 3/8" Couplers

SPECIFICATIONS	D55040	D55041
Inlet Fitting Size	3/8" Industrial Series	3/8" Industrial Series
Coupler Size	1/4" Industrial Series	3/8" Industrial Series
Tool Length	12.5"	12.5"
Tool Width	7"	7"
Tool Height	4"	4"
Tool Weight	4 lbs	4 lbs
Includes	1/4" Industrial Series Fitting	-

AIR COMPRESSOR REGULATED: Regulator fully open allows all 4 ports to operate at air compressor PSI setting

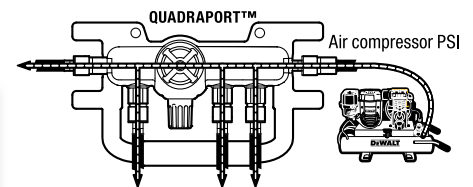

AIR COMPRESSOR AND QUADRAPORT[™] REGULATED: Regulator adjustment allows for 2 different pressure settings off one air compressor

