
TAG:	

Side Mount Faucet

Architect/Engineering Specifications:

Deck mounted single lever remote on/off control base faucet with polished chrome plated brass body, polished chrome plated brass deck mount swivel gooseneck, 2.2 GPM vandal resistant aerator, ceramic cartridge with adjustable temperature limit stop, single lever handle and 16" flexible stainless steel supply hoses with 3/8" compression connections, 4' sidespray with hose guide. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

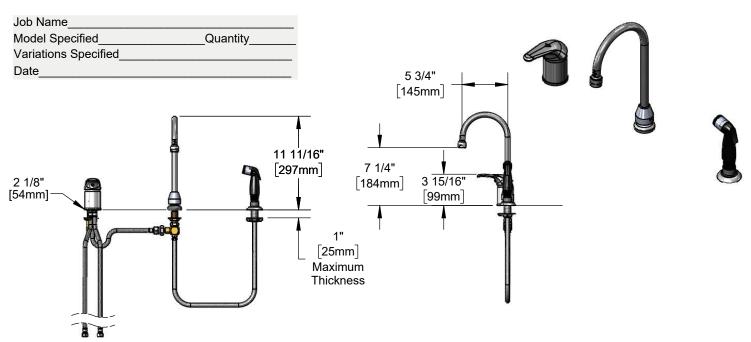

Features & Benefits:

- Deck mounted single lever remote on/off control base faucet w/ polished chrome plated brass body
- Polished chrome plated brass deck mount swivel gooseneck
- 2.2 GPM vandal resistant aerator, Series 6 (B-0199-06)
- Ceramic cartridge w/ adjustable temperature limit stop
- Single lever handle w/ color coded index
- 16" flexible stainless steel supply hoses w/ 3/8" O.D. compression connections
- · 4' sidespray with hose guide
- Material: Polished chrome plated brass body, gooseneck & handle and stainless steel supply hoses

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Ceramic Cartridge: Two Year (Limited)

Performance Data:

Pressure: 20 - 125 psi
Temperature: 40 °F - 140 °F
Flow Rate: 2.2 GPM @ 60 psi







Optional Outlets (Series 1 / VR Series 6)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Optional Handles
0.35	N/A	□ B-0199-01-N035	N/A	□ B-0199-06-N035	□ 6" Long Handle
0.5	N/A	□ B-0199-01-N05	N/A	□ B-0199-06-N05	
1.0	□ B-0199-01-F10	N/A	□ B-0199-06-F10	N/A	
1.5	□ B-0199-01-WS	□ B-0199-29	□ B-0199-06-WS	□ B-0199-29VR	
2.2	□ B-0199-01	□ B-0199-21	Standard	□ B-0199-21-VRF	







T&S BRASS AND BRONZE WORKS, INC.

