



5HR-242-09

Open Epoxy Coated Steel Hose Reel

Architect/Engineering Specifications:

Open epoxy coated steel hose reel, black front trigger spray valve, 3/8' x 50' hose, ratcheting system, multi-fit bracket, adjustable hose bumper and 3/8' NPT female inlet.

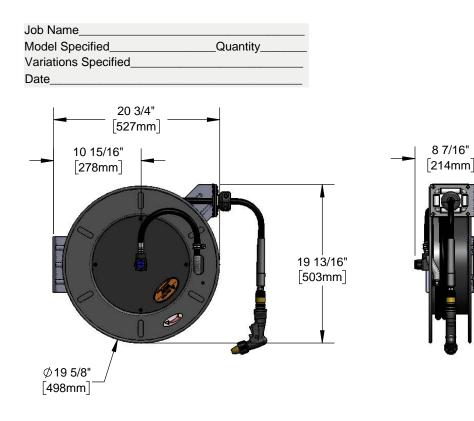



- Open epoxy coated hose reel
- Black front trigger water gun
- 3/8" x 50' hose
- Ratcheting system holds the length of hose untill a slight • tug to retract automatically
- 3/8" NPT female inlet
- Adjustable hose bumper
- Multi-fit bracket for wall, ceiling or under counter mounting
- Material: Epoxy coated steel open reel, wall bracket and brass & thermoplastic spray valve

Product Compliance:

8 7/16"

- EPAct 2005 Non-Compliant (PRSV)
- NSF 61 Exempt (Non-Potable) •

Warranty: One Year (Limited)

Hose: One Year (Limited)

Performance Data:

- Pressure: 20 125 psi
- Temperature: 40 °F 140 °F
- Flow Rate: 2.89 GPM @ 60 psi





