

Aluminum Spray Unit


Architect/Engineering Specifications:

4" deck mount mixing faucet, compression cartridges with spring checks, lever handles, vacuum breaker, 9 ft coiled hose with angled aluminum spray valve and 1/2" NPT female inlets. Certified to ASME A112.18.1/CSA B125.1.

Job Name	
Model Specified	Quantity
Variations Specified	
Date	





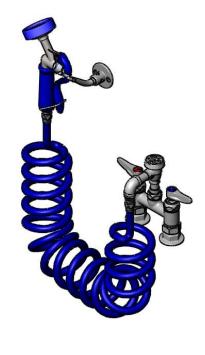

Features & Benefits:

- 4" deck mount mixing faucet w/ chrome plated brass body
- Quarter-turn Eterna compression cartridges w/ spring checks to prevent cross flow of water
- Lever handles w/ color coded indexes
- EasyInstall riser with vacuum breaker
- 9 ft coiled hose w/ angled aluminum spray valve
- 1/2" NPT female Inlets
- Materials: Chrome plated body & spout, chrome plated metal handles, polyurethane hose and aluminum spray valve

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Exempt (Non-Potable)
- ASSE 1001 (VB)





Warranty: One Year (Limited)

Performance Data:

Pressure: 20 - 125 psi Temperature: 40°F - 140°F Flow Rate: 4.12 GPM @ 60 psi

Optional Handles

- □ 4" Wrist Action
- □ Lever (Standard)
- □ 4-Arm

Optional Pre-Rinse Spray Valves

- □ B-0107 (1.42 GPM)
- □ B-0107-C (0.65 GPM)
 □ B-0107-J (1.07 GPM)
- □ B-0108 (1.48 GPM) □ B-0108-C (0.65 GPM)

Optional Cartridges With Checks

- □ Quarter-Turn Cerama w/ Check Valve
- □ Quarter-Turn Eterna w/ Spring Check (Standard)







