
TAC.	
IAG:	


SAFETLINK Water Appliance Connector

Architect/Engineering Specifications:

72" coated water connector hose (blue) with 1/2" NPT male outlet, 1/2" NPT female inlet, vacuum breaker and quick-disconnect. Certified to ASME A112.18.1 / CSA B125.1, NSF 61- Section 9 and NSF 372.

Job Name	
Model Specified	Quantity
Variations Specified	<u> </u>
Date	

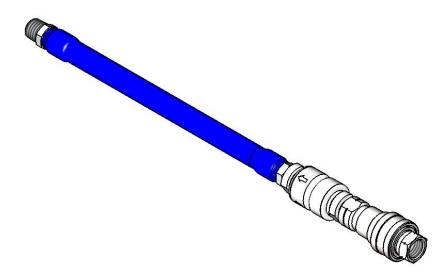

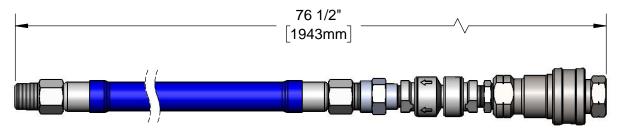





Features & Benefits:

- 72" coated water connector hose (blue)
- 1/2" NPT male welded fitting ends
- 3/8" NPT vacuum breaker
- 1/2" NPT female quick disconnect
- 1/2" NPT male outlet
- 1/2" NPT female inlet
- Extruded coating
- · Stainless steel braided hose
- Material: Extruded coated stainless steel braids

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- CSA B64.8 (VB)

Warranty: Five Year (Limited)

Performance Data:

Pressure: 20 - 125 psi
Temperature: 40°F - 175°F
Flow Rate: 9.31 GPM @ 60 psi







