




Architect/Engineering Specifications:

1.42 GPM angled spray valve with 72" overall length flexible stainless steel hose, heat resistant handle, vacuum breaker and 1/2" NPT male adapter. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372, ASSE 1001 & EPAAct 2005 compliant.

Job Name	_____
Model Specified	_____ Quantity _____
Variations Specified	_____
Date	_____

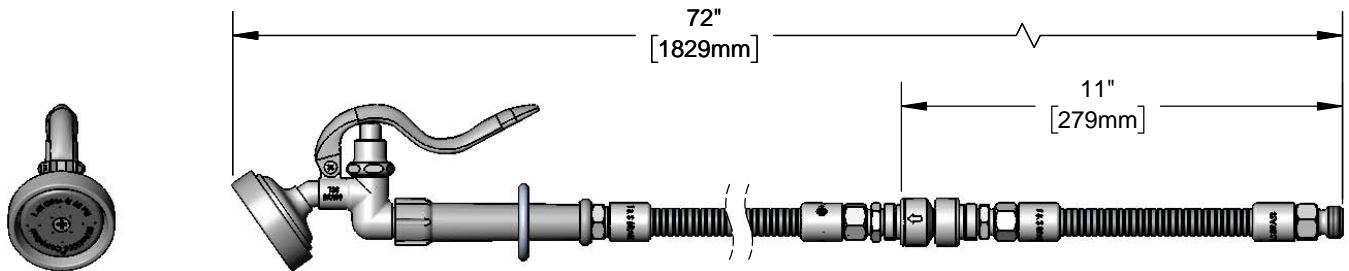

Features & Benefits:

- 1.42 GPM angled spray valve
- 72" overall length flexible stainless steel hose w/ heat resistant handle and hold down ring
- Vacuum breaker
- 1/2" NPT male inlet adapter
- Material: Polished chrome plated brass body and stainless steel hose

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- EPAAct 2005 (PRSV)
- ASSE 1001 (VB)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40°F - 140°F
- Flow Rate: 1.42 GPM @ 60 psi

