


510T 1/4"-2"

Bronze Check Valve
150 SWP - 300 WOG †
Horizontal Swing • Threaded Ends
Bronze Seat • TFE Disc
Conforms to: MSS SP-80

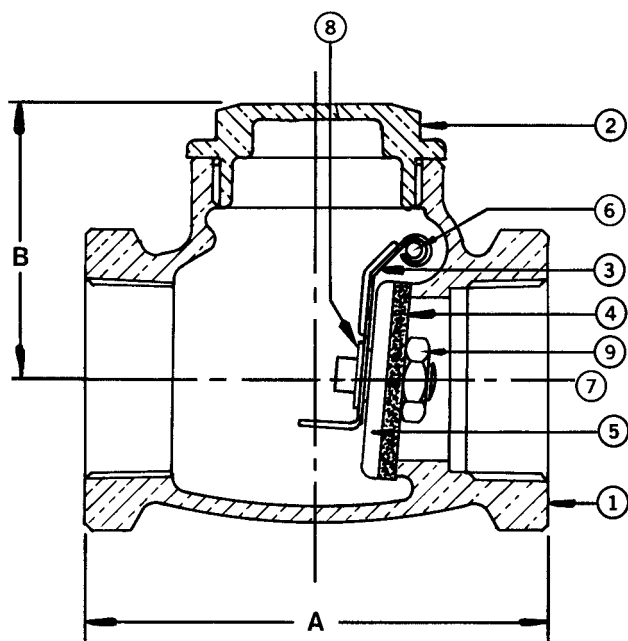

Note: Not intended for use in potable water.

| MATERIAL LIST | | | |
|---------------|------------------|-----------|--------------------------------|
| No. | PART | MATERIAL | SPECIFICATION |
| 1 | Body | Bronze | ASTM B62 |
| 2 | Cap | Bronze | ASTM B62 |
| 3 | Lever | Brass | Commercial |
| 4 | Disc | TFE | |
| 5 | Disc Holder | Brass | ASTM B16 1/4" to 3/4" Incl. |
| | | Bronze | ASTM B62 1" to 2" Incl. |
| 6 | Pin | St. Steel | Commercial |
| 7 | Plug (not shown) | Brass | ASTM B16 |
| 8 | Retaining Ring | St. Steel | Commercial |
| 9 | Disc Nut | Brass | Commercial |

| DIMENSIONS - INCHES/MILLIMETERS | | | | |
|---------------------------------|-------|-------------|-------------|----------------|
| Units | Size | A | B | C _v |
| Inches mm | 1/4 | 2.13 54 | 1.44 37 | 3.3 |
| Inches mm | 3/8 | 2.13 54 | 1.44 37 | 6.0 |
| Inches mm | 1/2 | 2.31 59 | 1.44 37 | 10.0 |
| Inches mm | 3/4 | 2.63 67 | 1.69 43 | 18.0 |
| Inches mm | 1 | 3.25 83 | 2.00 51 | 31.0 |
| Inches mm | 1 1/4 | 3.56 91 | 2.13 54 | 54.0 |
| Inches mm | 1 1/2 | 4.00 102 | 2.38 60 | 76.0 |
| Inches mm | 2 | 4.75 130 | 2.81 208 | 131.0 |

† Non-Shock

INNOVATION IN EVERY VALVE

The information presented on this sheet is correct at time of publication. Milwaukee Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to www.milwaukeevalve.com. ⚠ State of California Prop 65
WARNING: Cancer and Reproductive Harm. For more information visit www.p65warnings.ca.gov.



MILWAUKEE VALVE