

# CLOSET FLANGE

## 886 SERIES

### SPECIFICATION

Sioux Chief 886 series closet flange shall be used where necessary in drainage systems. Flange shall have a full-swivel, corrosion-resistant, stainless steel ring with holes for securing to floor and slots for attachment of closet bolts. Flange shall have a 4" Sch. 40 hub connection which conforms to ASTM D2665 (PVC) or D2661 (ABS).

### MATERIALS

**Flange Body:** ABS, PVC

**Swivel Ring:** 430 Stainless steel

### INSTALLATION

Always fasten flange to floor. Solvent weld ABS/PVC pipe into hub of flange according to glue manufacturer's instructions. Use screws in both holes on each side of closet bolt slots


### DIMENSIONS

<b>A:</b> Connection	4" Sch. 40 hub
<b>B:</b> Overall Height	2"
<b>C:</b> Flange diameter	7"
<b>D:</b> Flange opening dia.	4½"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



886-4PM

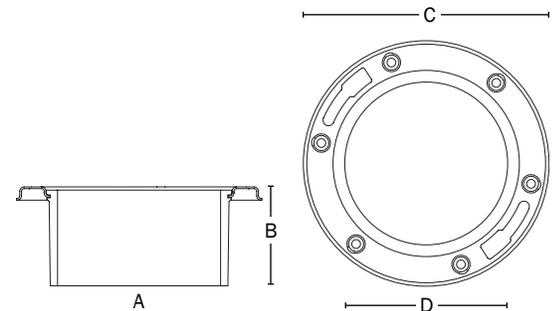

### Create Item Number

#### 886-A

e.g. **886-4PM:** 4" PVC Sch. 40 hub closet flange with stainless steel swivel ring

#### CONNECTION TYPE A

**4AM** = ABS flange

**4PM** = PVC flange