

GAS OUTLET BOX

696 series

Ox Box™

Item # Submitted	_____
Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 696 series Ox Box gas outlet box shall be used where necessary in plumbing and gas supply systems for residential or commercial units. Box shall allow for mounting with supply line from top or bottom, on-stud or between studs. Unit shall be available with yellow handle. Valve shall be available with or without brass shank. Metal support bracket shall install into top track of box for between stud configuration. Outlet shall be 1/2" or 3/4". Valve shall be 1/4-turn operation.

MATERIALS

outlet box: ABS
frame: ABS
bracket: galvanized steel
valve body: cast brass
valve handle: powder-coated yellow zinc
screw: chrome steel
shank: zinc
adapter*: brass
plug: steel
components: Teflon teats and chrome-plated brass ball

* Available in 1/2" and 3/4".



696-1020GF

VALVE RATING

max working pressure: 1/2 PSIG
max testing pressure: 10 PSI

GAS/GAS MIXES


natural gas
propane

CERTIFICATIONS/APPROVALS

ANSI Z21.15
CSA

DIMENSIONS

A: frame width	5 3/4"
B: frame height	7 1/4"
C: frame opening width	3 5/8"
D: frame opening height	5 1/8"
E: rough-in box inner width	4"
F: rough-in box overall depth	3 1/2"
G: rough-in box inner height	5 1/2"
H: supply connection	(see 'A' and 'B' below)
I: outlet connection	(see 'A' below)
J: bracket length	18"
K: bracket width	5 5/8"
bracket thickness	18 gauge

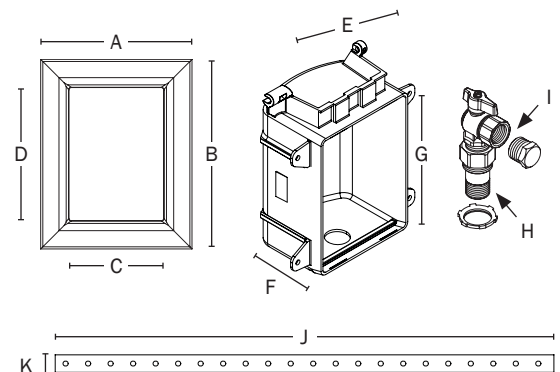

Create Item Number

696-10 A B GF

e.g. 696-1020GF = Gas Ox Box with 1/2" inlet and outlet

A VALVE CONNECTION

- ☐ 2 1/2" outlet x 1/2" inlet
☐ 3 3/4" outlet x 3/4" inlet

B ADAPTER

- ☐ 0 none
☐ 1 female x male NPT adapter