



ELECTROFUSION COUPLING **PE2406/PE2708** **CTS/IPS**


- Pin Type: 4.7R (4.7 Pin with Resistor)
- *Approval: ASTM D2513/F1055
- Approval: ASTM D2513
- Approval: ASTM F1055
- Approval: CSA B137.4.1

Note: Operating pressure is 200 psi for PE4710 couplings in allowable applications.

* Industrial Non-Compliant ASTM Fittings

** For use with Bar-Code Processor Only

Please call for more information on availability, pricing, other sizes and dimensions.

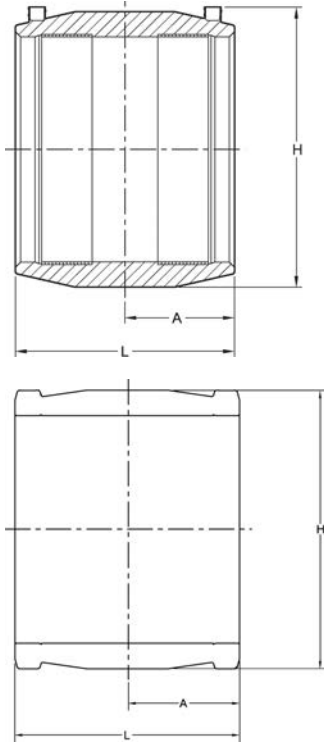

<...>	Size (inch)	GFPC Part No.	GF weight Part No.	(lb)	H (inch)	L (inch)	A (inch)	Box Qty
	1/2 CTS	5760001	360 000 884	0.110	2.01	3.15	1.57	50
*	3/4 CTS	5757042	360 000 888	0.110	2.15	2.98	1.42	40
	1 CTS	5760005	360 000 892	0.198	2.52	3.46	1.73	25
*	1-1/4 CTS	10001613	360 000 896	0.154	2.56	3.30	1.57	30
	1/2 IPS	5757001	360 000 886	0.132	2.15	2.98	1.42	40
	3/4 IPS	5760004	360 000 890	0.154	2.48	3.46	1.73	25
	1 IPS	5760006	360 000 894	0.132	2.63	3.46	1.73	25
	1-1/4 IPS	5760008	360 000 898	0.220	3.04	3.86	1.93	50
	1-1/2 IPS	5760010	360 000 900	0.419	3.36	4.33	2.07	35
	2 IPS	5760012	360 000 921	0.419	3.78	4.72	2.36	25
	3 IPS	5757007	360 000 934	1.146	5.18	5.59	2.72	36
	4 IPS	5757008	360 000 937	1.565	6.51	6.14	3.00	10
	6 IPS	5757009	360 000 941	4.365	8.70	8.35	4.10	8
*	6 IPS	10001682	360 000 940	4.145	8.70	8.35	4.10	8
	8 IPS	5757010	360 000 945	8.422	11.20	9.48	4.70	4