



PACKAGE HEAT PUMP UNITS

FORM NO. P11-773 REV. 4
Supersedes Form No. P11-773 Rev. 3

Featuring Industry Standard R-410A Refrigerant

R-410A

RJNL- 13 SEER HIGH EFFICIENCY SERIES
NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

RJNL- 11 EER HIGH EFFICIENCY SERIES
NOMINAL SIZES 6 TONS [21.1 kW]



RJPL- 14 SEER HIGH EFFICIENCY SERIES
NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]



*Unit shown with
optional louver
panels installed.



(14 SEER MODELS ONLY)



480 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION

Single Power Supply For Both Unit and Heater Kit								Separate Power Supply For Both Unit and Heater Kit				
Model No. RJNL-	RXJJ- Heater Kit Nominal kW	Rated Heater kW @ 480 V	Heater KBTU/Hr @ 480 V	Heater Amp. @ 480 V	Unit Min. Ckt. Ampacity @ 480 V	Over Current Protective Device Size		Heater Kit Min. Ckt. Ampacity	Heater Kit Max. Fuse Size	Heat Pump Min. Ckt. Ampacity @ 480 V	Heat Pump Over Current Protective Device Size	
						Min./Max. @ 480 V	Min./Max. @ 480 V				Min./Max. @ 480 V	Min./Max. @ 480 V
A036DK	No Heat	—	—	—	11	15	15	—	—	11	15	15
	A06D+	5.6	19.10	6.7	19	20	20	9	15	—	—	—
	A10D+	9.6	32.75	11.6	25	25	25	15	15	—	—	—
	*A11D+	9.6	32.75	11.6	25	25	25	15	15	—	—	—
	A12D+	11.2	38.21	13.5	28	30	30	17	20	—	—	—
	A15D+	14.4	49.13	17.3	32	35	35	22	25	—	—	—
	A20D+	19.2	65.51	23.1	40	40	40	30	30	—	—	—
	*A21D+	19.2	65.51	23.1	40	40	40	29	30	—	—	—
A042DK	No Heat	—	—	—	11	15	15	—	—	11	15	15
	A06D+	5.6	19.10	6.7	19	20	20	9	15	—	—	—
	A10D+	9.6	32.75	11.6	25	25	25	15	15	—	—	—
	*A11D+	9.6	32.75	11.6	25	25	25	15	15	—	—	—
	A12D+	11.2	38.21	13.5	28	30	30	17	20	—	—	—
	A15D+	14.4	49.13	17.3	33	35	35	22	25	—	—	—
	A20D+	19.2	65.51	23.1	40	40	40	30	30	—	—	—
	*A21D+	19.2	65.51	23.1	40	40	40	29	30	—	—	—
A048DK	No Heat	—	—	—	11	15	15	—	—	11	15	15
	A06D+	5.6	19.10	6.7	20	20	20	9	15	—	—	—
	A10D+	9.6	32.75	11.6	26	30	30	15	15	—	—	—
	*A11D+	9.6	32.75	11.6	26	30	30	15	15	—	—	—
	A12D+	11.2	38.21	13.5	28	30	30	17	20	—	—	—
	A15D+	14.4	49.13	17.3	33	35	35	22	25	—	—	—
	A20D+	19.2	65.51	23.1	40	40	40	30	30	—	—	—
	*A21D+	19.2	65.51	23.1	40	40	40	29	30	—	—	—
A060DK	No Heat	—	—	—	13	15	20	—	—	13	15	20
	A06D+	5.6	19.10	6.7	22	25	25	9	15	—	—	—
	A10D+	9.6	32.75	11.6	28	30	30	15	15	—	—	—
	*A11D+	9.6	32.75	11.6	28	30	30	15	15	—	—	—
	A12D+	11.2	38.21	13.5	30	30	30	17	20	—	—	—
	A15D+	14.4	49.13	17.4	35	35	35	22	25	—	—	—
	A20D+	19.2	65.51	23.3	43	45	45	30	30	—	—	—
	*A21D+	19.2	65.51	23.3	43	45	45	30	30	—	—	—

+ Field Installed Only

* = For Canadian Use Only. Uses "P" Fuses for Inductive Circuit.

Roofcurb Adapters

Old Models

MEDIUM CABINET (3 TON [11 kW])

(-)SNC, (-)SND, (-)SNE
(-)RGE, (-)RGF, (-)RGG
(-)PNC, (-)PND

LARGE CABINET


(3-3.5 TON [11-12 kW])

(-)RGE, (-)RGF, (-)RGG,
(-)RGH (3 TON [11 kW])

EXTRA LARGE CABINET

(3.5-5 TON [12-18 kW])

(-)SNC, (-)SND, (-)SNE
(-)RGE, (-)RGF,
(-)RGG (4-5 TON [14-18 kW])
(-)PNC, (-)PND, (-)RGH
(3.5, 4 TON [12-14 kW])

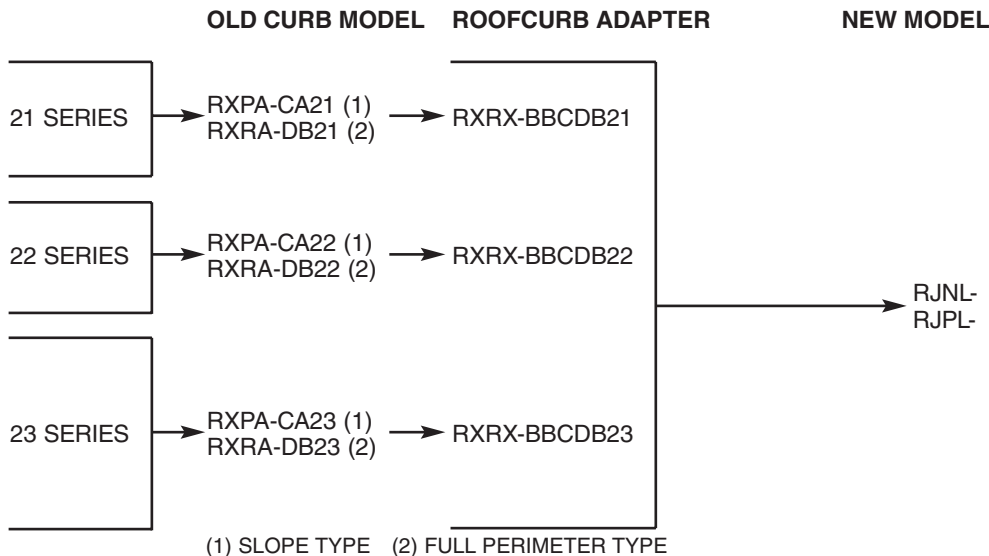

Field Installed Resistance Heater Kits

Electric Heater Kits are designed for field installation using either single-point power wiring or dual circuit wiring. Low voltage plugs are provided to allow for quick connection to the unit. Removing a block-off panel on the unit allows the heater elements to be inserted into the supply air down stream from the indoor coil and supply air blower.

[] Designates Metric Conversions

Model Number Identifier:

