

# Installation Instructions

## » Tub Spout Elbow - FIP Swivel Connection

Before installation, consult local and jurisdictional plumbing codes.  
Always install per local codes, using proper plumbing methods.  
Always test all connections before use.


Properly position tub spout elbow and hold copper fitting in place while tightening the brass swivel nut to tub/shower valve. Hand tighten nut. Using a wrench, tighten an additional 1/4-turn or until snug.

**Caution:** Do not swivel or move the tub ell after tightening is complete. Doing so may damage the gasket

**Caution:** Do not over-tighten nut. Doing so may damage the gasket

**Caution:** Do not use pipe thread sealant or pipe tape on threads. Doing so may interfere with a proper gasket-seal connection.

**Caution:** Failure to follow the instructions above will void the Warranty. See [www.siouxchief.com](http://www.siouxchief.com) for Warranty information

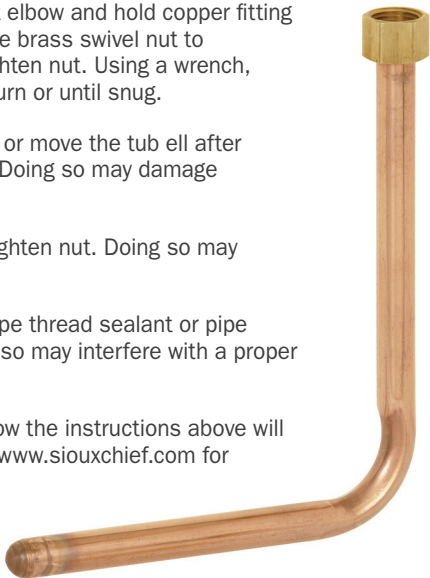

⚠ **WARNING:** Cancer and Reproductive Harm. [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**Sioux Chief**

P: 1.800.821.3944 | F: 1.800.758.5950 | [www.siouxchief.com](http://www.siouxchief.com)

10-20