


ROUND SPIN-IN TAKEOFF — DX70, 71, 72, 73, 74, 75




Spin-In
No Damper

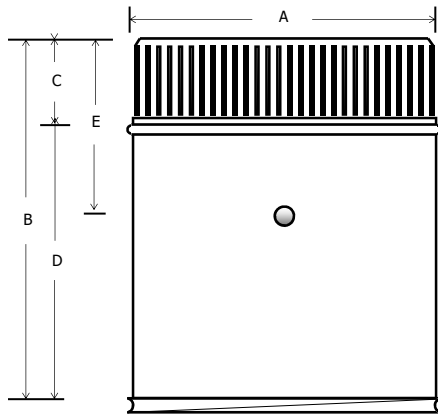

Spin-In
Damper & Scoop



Optional Damper
Extension Kit
1-1/2" or 2" H



Commercial Damper
Extension: 2" H with 9
position locking dial,
18GA construction and
3/8" Rodded Damper

| A | B | C | D | E | GA |
|----|--------|------|--------|------|--------|
| 4 | 5.75 | 1.75 | 4 | 3.5 | 28, 26 |
| 5 | 5.75 | 1.75 | 4 | 3.5 | 28, 26 |
| 6 | 5.75 | 1.75 | 4 | 3.5 | 28, 26 |
| 7 | 5.75 | 1.75 | 4 | 3.5 | 28, 26 |
| 8 | 5.75 | 1.75 | 4 | 3.5 | 28, 26 |
| 9 | 10.125 | 1.75 | 8.375 | 4.5 | 26 |
| 10 | 10.125 | 1.75 | 8.375 | 5.0 | 26 |
| 12 | 12.125 | 1.75 | 10.375 | 6.0 | 26 |
| 14 | 12.125 | 1.75 | 10.375 | 7.0 | 26 |
| 16 | 12.125 | 1.75 | 10.375 | 8.0 | 26 |
| 18 | 12.125 | 1.75 | 10.375 | 9.0 | 26, 24 |
| 20 | 12.125 | 1.75 | 10.375 | 10.0 | 26, 24 |
| 22 | 12.125 | 1.75 | 10.375 | 11.0 | 26, 24 |
| 24 | 12.125 | 1.75 | 10.375 | 12.0 | 26, 24 |

Galvanized G40 Steel. G90 Available. Reg Damper w/one or two hardware

Part Number Designations

DX70xx Where:

XX = Diameter (04-24)

E = Damper Extension 1-1/2" or 2" H

CE = Commerical Dmpr Ext w/ 3/8" Rodded Damper and locking dial

Options:

Standard 28/26GA; 24GA and 22GA available

DX71xx = Spin-In w/Damper

DX73xx = Spin-In w/90 scoop

DX71Exx = Spin-In w/Damper Ext

DX74xx = Spin-In w/45 scp & Dmpr

DX71CExx = Spin_in w/Comm Dmpr Ext

DX75xx = Spin-In w/90 Scp & Dmpr

DX72xx = Spin-in w/45 scoop

PROJECT: _____ COMPANY: _____ DATE : _____

LOCATION: _____ SUBMITTED BY: _____