


MOTORIZED DAMPER



THE PREFERRED DAMPER FOR ZONE CONTROL OR FRESH AIR INTAKE.

- ◆ High Torque Motor for reliable operations time after time. (24V or 120V)
- ◆ Return Spring Assembly provides the strongest return under load.
- ◆ Adjustable flow control standard on all models (N/A with endswitch).
- ◆ Positive closure provides extremely tight seal.
- ◆ Floating Motor mount assures proper alignment of motor, shaft and damper to prevent binding thereby giving greater life expectancy.
- ◆ Combined clutch/coupler reduces number of moving parts.
- ◆ Endswitch available on request.

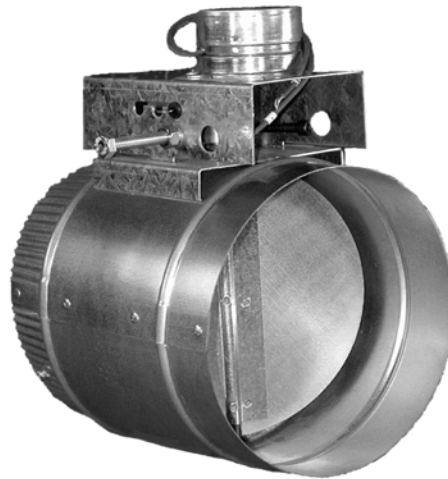

FRESH AIR MANUFACTURING CO.

Technologies in Ventilation


649 N. Ralstin St., Meridian, ID 83642 * (208)884-8931 * 800-234-1903 * FAX: (208)884-8943

MOTORIZED DAMPER



OPTIONS:

- ◆ 24V or 120V models available
- ◆ Normally open or normally closed
- ◆ With or without End Switch

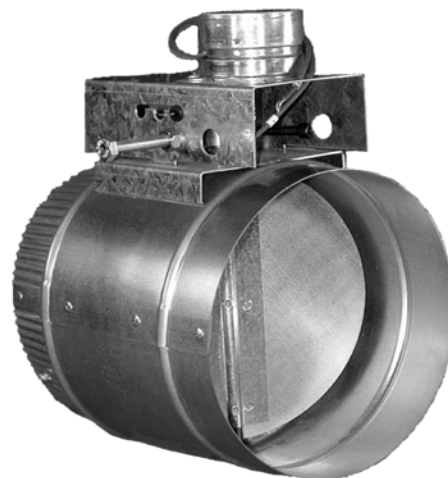

SPRING RETURN DAMPER		
SIZE	NORMAL OPEN	NORMAL CLOSED
4"	ADO 4	ADC 4
5"	ADO 5	ADC 5
6"	ADO 6	ADC 6
7"	ADO 7	ADC 7
8"	ADO 8	ADC 8
10"	ADO 10	ADC 10
12"	ADO 12	ADC 12
14"	ADO 14	ADC 14
16"	ADO 16	ADC 16
18"	ADO 18	ADC 18

SPRING RETURN DAMPER SPEC'S									
DIAM-ETER	4"	5"	6"	7"	8"	10"	12"	14"	16"
Max. Height (with motor)	7"	8"	9"	10"	11"	13"	15"	17"	19"
Max. Motor Height	3"								
Max. Length	6"	6"	6"	7"	8"	10"	12"	14"	16"



FRESH AIR MANUFACTURING CO.
Technologies in Ventilation