


Connector Plus™ Flexible Duct Connector

Residential Quality 2"-3"-2" 28G

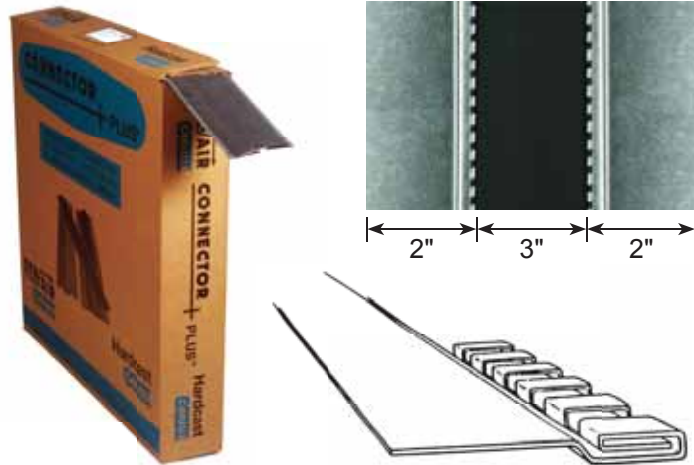

Double Fold Offset Seam

Connector Plus Residential Quality Flexible Duct Connector is the premium manufactured flexible duct connector for residential applications. It utilizes a narrower section of 28G G-90 galvanized steel for easy bending, is available in a variety of special fabrics and excels in isolating vibrations produced by air handling units, fans, blowers and other residential HVAC equipment. For handler convenience, the continuous 100' rolls readily dispense from a bench-high carton.

AVAILABLE IN THE FOLLOWING FABRICS

- NEOPRENE
- VINYLFLEX

PART #	PRODUCT DESCRIPTION	QTY.	FABRIC REFERENCE
307889	CONN RSDL NEO CLS BLK 2-3-2 28G (RCPN-8-100)	100 ft./box	NEOPRENE
307892	CONN RSDL NEO OPN BLK 2-3-2 28G (RCPN-08-100)	100 ft./box	NEOPRENE
307899	CONN RSDL VNLFLX CLS BLK 2-3-2 28G (RCPN-B8-100)	100 ft./box	VINYLFLEX
307904	CONN RSDL VNLFLX OPN BLK 2-3-2 28G (RCPN-OB8-100)	100 ft./box	VINYLFLEX
307902	CONN RSDL VNLFLX FLT BLK 2-3-2 28G (RCPN-FB8-100)	100 ft./box	VINYLFLEX

FEATURES AND BENEFITS

- Made with G-90 galvanized steel (thicker galvanized coated steel for extended product life)
- Double Fold Offset Seams™ are carefully pressure controlled during manufacturing
- The Offset Seam acts as a structural stabilizer, adding rigidity while eliminating the need for added 90 degree used in some shops
- Offset Seams protect fabrics during folding/rolling, adds structural stiffness, yet cuts and works easily and is precisely perforated
- Offers superior holding power and tear resistance
- 2" – 3" – 2" configuration
- Provides the correct fabric and metal gauge for every application

SPECIFICATION/STANDARDS COMPLIANCE

Property	Method	Results
Surface Burning Characteristics of Building Materials	ASTM-E84	Pass
	Los Angeles Approval RR# 8434	Pass