

# Wastewater

## CS-SS



### Applications

- Little Giant CS-SS Series Water Removal Systems are ideal for use in low lying areas needing drainage and residential crawl spaces


### Pump Features

- 1/3 hp permanent split capacitor (PSC) motor with thermal overload protection
- Made of cast iron housing with protective epoxy coating for corrosion resistance
- 1-1/2" FNPT discharge
- Handles liquid and solid waste materials up to 1/2" diameter
- Integral snap action float switch for automatic operation
  - "On" level: 7"-10"
  - "Off" level: 2"-5"
- 1-1/4" x 24' sump pump discharge hose kit (adapters and hose clamps included)

### Basin Features

- 18" x 22" perforated basin, light weight and made of corrosion resistant polypropylene
- Structural foam cover with slip fit flanges
- 1-1/2" MNPT x 1-1/4" barbed check valve

## Engineering Data

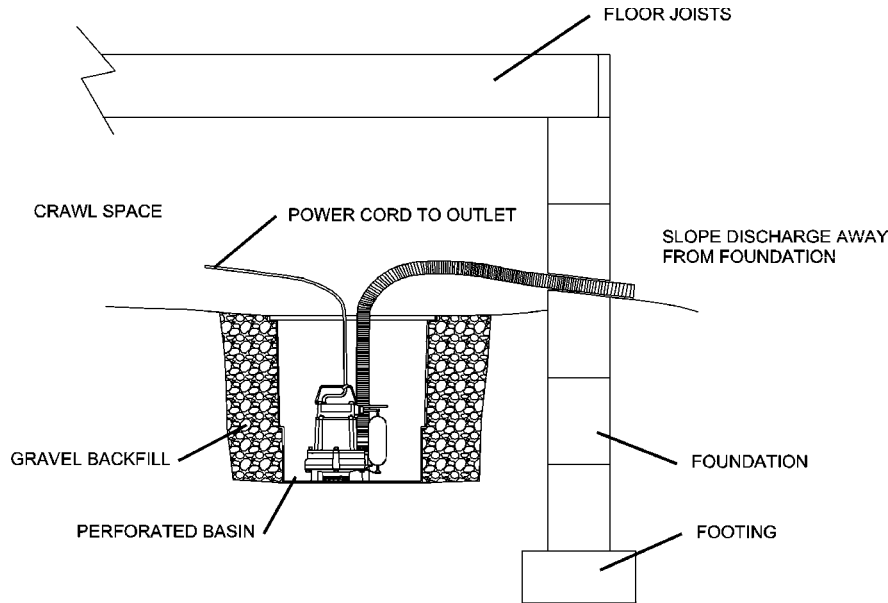

## Specifications


Item No.	Model No.	HP	Volts	Hz	Running Amps	Watts	Performance (GPM @ Head)			Cord	Shutoff (ft)	Weight (lbs)	Dimensions
							5'	10'	15'				
14940655	CS-SS	1/3	115	60	10	750	50	42	27	20'	22	41	18" dia. x 22" tall

cCSA listed pump

## Construction

Cover	Polycarbonate
Motor housing	Epoxy-coated cast iron
Impeller material	Nylon
Impeller Type	Vortex
Volute	Epoxy-coated cast iron/polypropylene
Power Cord	SJTW
Mechanical Shaft Seal	Nitrile with carbon and ceramic faces
Fasteners	Stainless steel
Shaft	Cold roll steel
Bearings	Upper and lower sintered sleeve bearings

## Performance Data

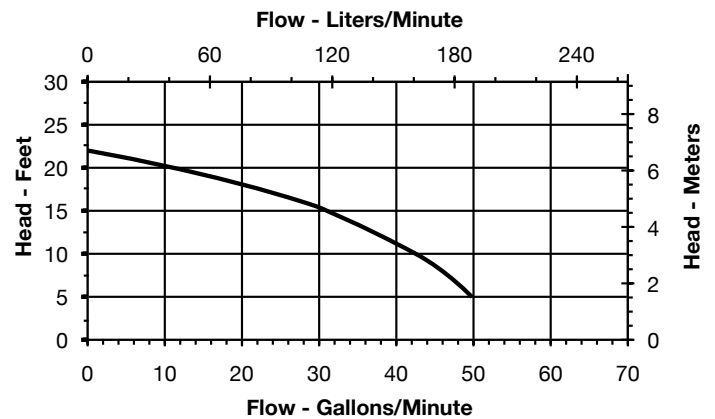

## Basin Construction

Basin	Polypropylene
Cover	Structural foam



P.O. Box 12010  
Oklahoma City, OK 73157-2010  
Phone: 1.800.701.7894  
Fax: 1.800.678.7867  
www.LittleGiantPump.com

