HARCO PVC IPS GASKETED FITTINGS

DESIGN DATA

S


Applicable Standards:

Materials:	ASTM D-1
Joints:	ASTM D-3
Gaskets:	ASTM F-4
Wall Thickness:	SDR-21
NSF 14 Certification	
Vacuum Qualification:	22"-Hg for
	method of

ASTM D-1784, NSF 14 ASTM D-3139 ASTM F-477 ASDR-21 22°-Ha for 4 bours with no loss pe

22"-Hg for 4 hours with no loss per method of ASTM D-3139

GASKET x FLANGE ADAPTER

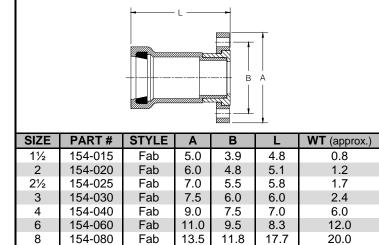

NOTES:

- All lay lengths & weights are approximate and are subject to change without notice
- Fabricated fitting configurations may vary

STYLE LEGEND:

- M One piece molded
- Fab Fabricated using SCH-40 PVC fittings with Harco Spigot adapters (or pipe) solvent welded together (See pressure rating warning on this page)


Fab Style: These fittings use SCH-40 PVC fittings. SCH-40 PVC fittings do not have a long term pressure rating. See section 6.3.2 of ASTM D2466-97. Use of these fittings in pressure systems is at user's risk.


The use of anything but properly designed and installed thrust blocks will reduce the life of plastic fittings. Thrust blocks must be poured concrete only and sized for the soil conditions. Joint restraint products are available.

WARNING: Cyclical pressure surges (WATER HAMMER) can reduce the life of PVC fittings. Where such conditions may exist, HARCO DEEP BELL DUCTILE IRON FITTINGS for IPS size PVC pipe should be considered. HARCO DEEP BELL DUCTILE IRON FITTINGS are available in sizes 1½" through 12".

SIZE	PART #	STYLE	A	L	WT (approx.)	
11⁄2	132-015	Fab	2.7	5.7	0.5	
2	132-020	Fab	3.3	6.1	0.7	
21⁄2	132-025	Fab	3.8	7.3	1.2	
3	132-030	Fab	4.5	7.5	1.5	
4	132-040	Fab	5.8	9.4	2.6	
5	132-050	Fab	7.0	10.5	5.0	
6	132-060	Fab	8.1	12.1	6.0	

GASKET x FEMALE NPT ADAPTER

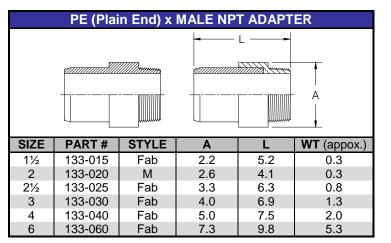

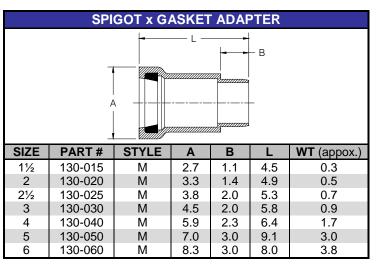



THE HARRINGTON CORPORATION

P.O. BOX 10335 • LYNCHBURG, VIRGINIA 24506 • 3721 COHEN PLACE • LYNCHBURG, VIRGINIA 24501 PHONE: (434) 845-7094 • FAX: (434) 845-8562 • E-MAIL: sales@harcofittings.com • WEB: www.harcofittings.com