For Residential and Commercial Applications							
Job Name	Engineer / Architect						
Job Location	Wholesaler						
Submittal Date	Contractor						

WB00/ WB10 7/8" OD Copper Water Heater Connectors – Female Iron Pipe x Female Iron Pipe

Use: For use in exposed locations only to connect water heaters and other water connected devices to the water supply

Design Features:

- Superior galvanic corrosion resistance. Patented internal dielectric sleeve effectively isolates dissimilar metals within the waterway to prevent galvanic corrosion
- No dielectric union needed with installation. Dielectric is built-in to the design of the connector
- Less torque to seal against the pliable rubber washer, especially on rough nipple surfaces
- Longer connector nuts allow a greater number of thread-to-thread contacts and a better seal
- 100% Compliant (WB00 only)

Operating Specifications:

Temperature:40° - 180° F (NSF61 maximum 82° C)Pressure:water pressures up to 125 PSI maximum

CONNECTOR MATERIAL SPECIFICATIONS						
Tubing	Copper					
Dielectric Sleeve	Polypropylene					
Nut	Brass					
End Fitting	Brass					
Washer	Rubber					

Part Listing:


WB00-12N	7/8" OD X 12" connector with 3/4" FIP x 3/4" FIP end fittings
WB00-15N	7/8" OD X 15" connector with 3/4" FIP x 3/4" FIP end fittings
WB00-18N	7/8" OD X 18" connector with 3/4" FIP x 3/4" FIP end fittings
WB00-24N	7/8" OD X 24" connector with 3/4" FIP x 3/4" FIP end fittings
WB00-30N	7/8" OD X 30" connector with 3/4" FIP x 3/4" FIP end fittings
WB00-36N	7/8" OD X 36" connector with 3/4" FIP x 3/4" FIP end fittings
WB10-18N	7/8" OD X 18" connector with 1" FIP x 3/4" FIP end fittings

This specification and all information contained herein is the confidential and exclusive property of Brass-Craft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.





WB00/ WB10 7/8" OD Copper Water Heater Connectors – Female Iron Pipe x Female Iron Pipe

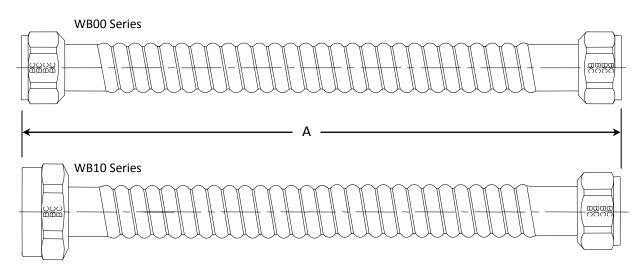

PART DIMENSIONS (Inches)										
Connector Length – Nut by Nut (±.31)										
Model	Dim.	12″	15″	18″	24″	30″	36″			
WB00	Α	12.31	15.31	18.31	24.31	30.31	36.31			
WB10	Α			18.31						

Listings & Certifications (WB00 Series only):

- IAPMO listed to ASME A112.18.6 and CSA B125 (File # 0452)
- CSA listed to CSA B125 (File # 204593)
- Compliant product CSA listed to Low Lead Content Certification Program – Plumbing Products Class 6853-01



This specification and all information contained herein is the confidential and exclusive property of Brass-Craft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.

