


LOTION DISPENSER

Installation, Operation and Maintenance Instructions

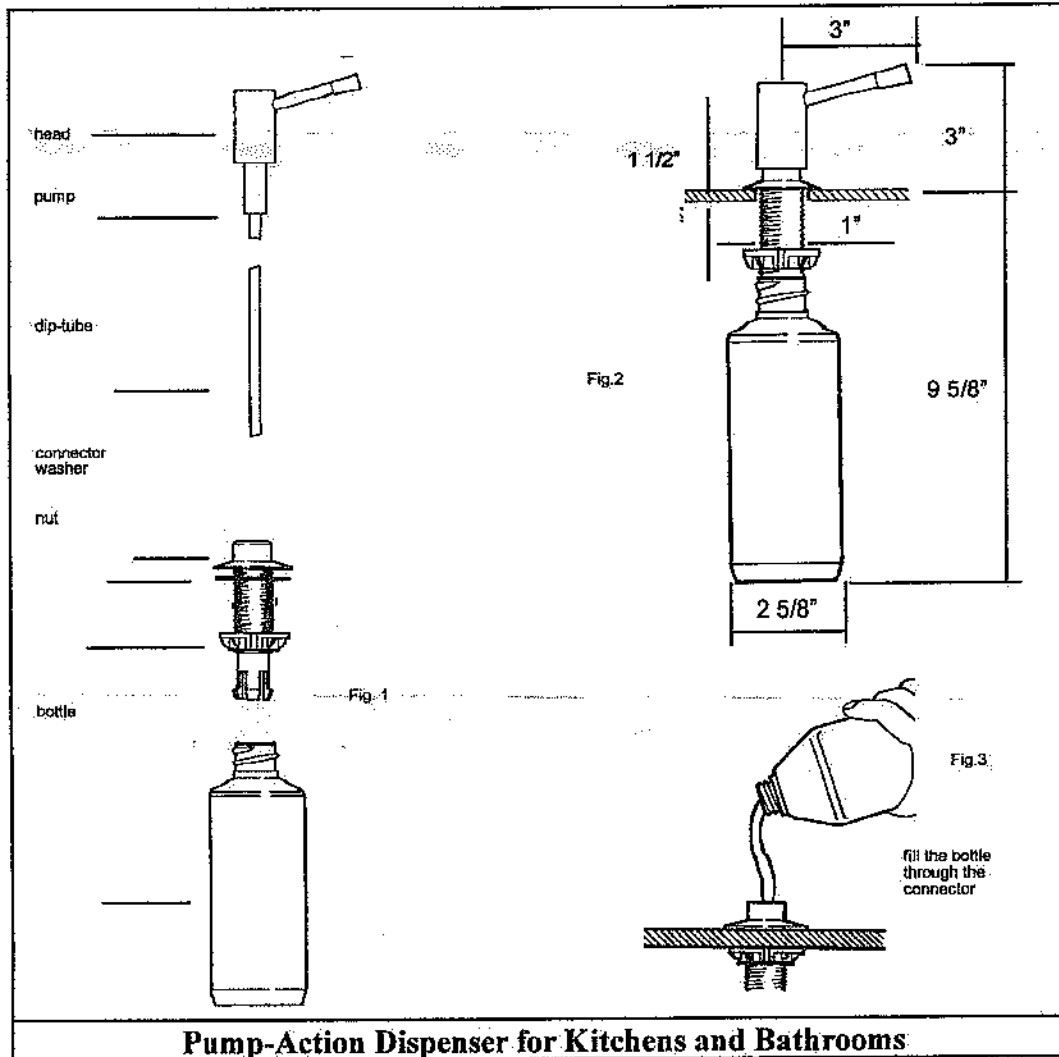

A. INSTALLATION

1. Prepare a 1"-1 3/8" diameter hole in the sink or countertop. The center of the hole should not be more than 4 3/4" from the bowl edge.
2. Pass the connector down through the hole from above with the washer immediately above the work surface. Screw the nut onto the connector beneath the work surface and tighten - hand pressure should be sufficient.
3. Push the bottle onto the lower end of the connector firmly until the bottle clicks into position on the four (4) plastic lugs.
4. The pump unit will already be assembled within the head. Push the dip-tube into the lower end of the pump unit as far as it will go.
5. Fill the bottle through the connector as shown in Fig.3 (the bottle holds 17 ounces and should not be overfilled), then place the assembled head, pump unit and dip-tube into the connector.

B. OPERATION

1. A single full downward movement will expel liquid at a 45° angle to the work surface. (Several strokes may be needed when first using to prime the pump assembly)
2. Drip free operation is ensured if a brisk downward movement is applied and then immediately released. The automatic reverse action of the pump will draw back into the spout any liquid not fully ejected.

C. MAINTENANCE

If the dispenser is not used for a period of time, especially in cold conditions, the liquid in the pump may solidify. Remove the head and pump unit and then operate while hot water is allowed to run down the tube. After the mechanism is clear, replace.