V1-**DL & V3-**DL Speedi Plumb® Vinyl Toilet Connectors -Compression Inlet

Use: For use in potable water distribution systems in accessible locations only

Design Features:

- **No kink hose.** The specially engineered reinforced PVC hose provides unique flexibility to prevent kinking and crimping
- Greater strength and durability with a tighter weave and two-layer bonded construction, outperforms conventional vinyl connectors
- Longer wing nuts ease installation for speedier connections
- **Rubber washers** provide a large pliable sealing surface and ensures a long lasting water tight connection
- 8-sided pneumatic crimp provides greater dependability for reliable nut-to-hose connections

Operating Specifications:

Temperature:	40°- 140° F, intermittent to 180° F
Pressure:	125 PSI maximum


 Tubing Diameter:
 0.300" I.D. (0.500" O.D.)

MATERIAL SPECIFICATIONS		
Hose PVC with polyester braid reinforcement		
Barbs	Compliant brass	
Ferrules	Zinc plated 1008 steel	
Nuts	Polypropylene	
Washers	Rrubber	
Compression Ring & Nut	C36000 brass	

Part Listing:

V1-9DL F	3/8" compression x 7/8" ballcock x 9" length
V1-12DL F	3/8" compression x 7/8" ballcock x 12" length
V1-16DL F	3/8" compression x 7/8" ballcock x 16" length
V1-20DL F	3/8" compression x 7/8" ballcock x 20" length
V3-9DL F	1/2" compression x 7/8" ballcock x 9" length
V3-12DL F	1/2" compression x 7/8" ballcock x 12" length
V3-20DL F	1/2" compression x 7/8" ballcock x 20" length


This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

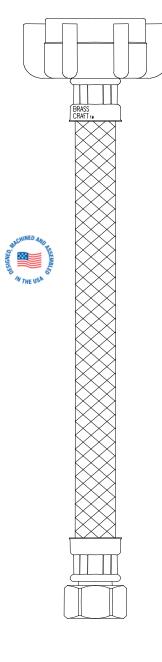



400.118 V1 & V3-DL SP Vinyl Toilet Connector - Compression Inlet REV 01/11

V1-**DL & V3-**DL Speedi Plumb[®] Vinyl Toilet Connectors -Compression Inlet

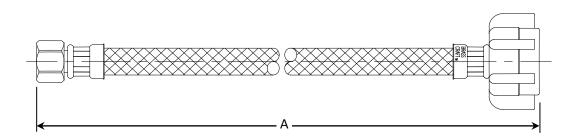

PART DIMENSIONS (Inches)		
Model	DIM. A	
V1-9DL	9.0 / 10.0	
V1-12DL	12.0 / 13.0	
V1-16DL	16.0 / 17.0	

PART DIMENSIONS (Inches)	
Model	DIM. A
V1-20DL	20.0 / 21.0
V3-9DL	9.0 / 10.0
V3-12DL	12.0 / 13.0

PART DIMENSIONS (Inches)		
Model	DIM. A	
V3-20DL	20.0 / 21.0	

Listings & Certifications:

- IAPMO listed to ASME A112.18.6-2003 (File # 0452)
- CSA listed to ASME A112.18.6-2003 / CSA B125 (File # 204593)



