

JENN-AIR® Side by Side Built-In Refrigerator

PRODUCT MODEL NUMBERS

JS42CXDBD JS48CXDBD
JS42CXDUD JS48CXDUD
JS42CXFXD JS48CXFXD
JS42PPDUD JS48PPDUD
JS42PPFXD JS48PPFXD
JS42SEDUD JS48SEDUD
JS42SEFXD JS48SEFXD


Electrical: A 115 Volt, 60 Hz., AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water Supply: A cold water supply with water pressure of between 30 and 120 psi (207 - 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 - 414 kPa).

Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F.

CABINET OPENING DIMENSIONS

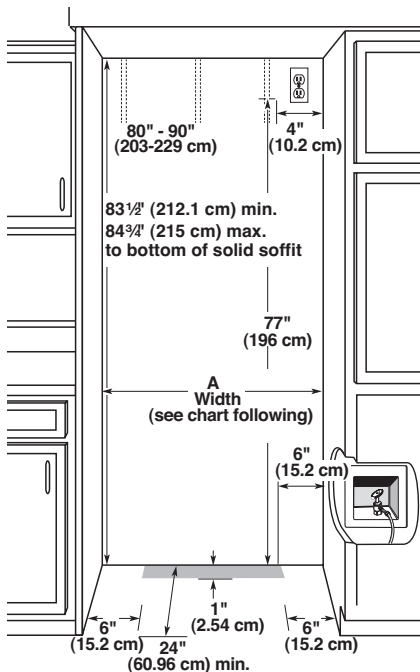


Model	Width A (as shown above)
42	41 ¹ / ₂ " (105.4 cm) to 41 ³ / ₄ " (106.1 cm)
48	47 ¹ / ₂ " (120.7 cm) to 47 ³ / ₄ " (121.3 cm)

NOTE: Flooring under refrigerator must be at same level as the room. Face of cabinetry must be plumb.

OVERALL DIMENSIONS


SIDE VIEW

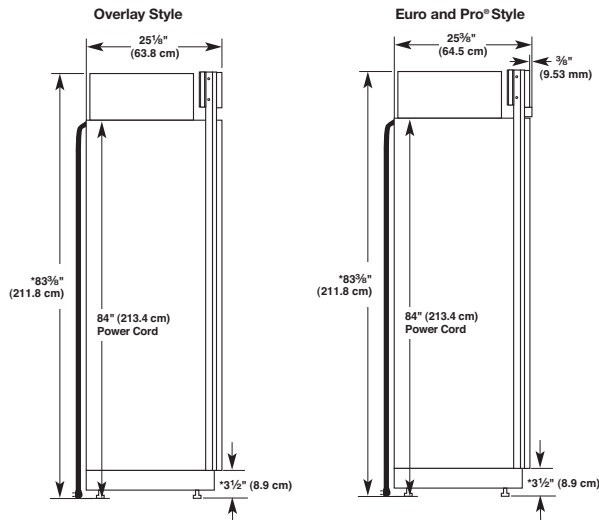

- The depth from the front of the top grille to the back of the refrigerator cabinet is 25-3/8" (64.5 cm) for Euro and Pro styles. The Overlay style depth is 25-1/8" (63.8 cm) without custom panels.
- Height dimensions are shown with the leveling legs extended to 1/8" (3 mm) below the rollers.
- The power cord is 84" (213 cm) long.
- The water line attached to the back of the refrigerator is 5' (1.5 m) long.

* When leveling legs are fully extended to 1-1/4" (3.2 cm) below rollers, add 1-1/8" (2.9 cm) to the height dimensions.


TOP VIEW

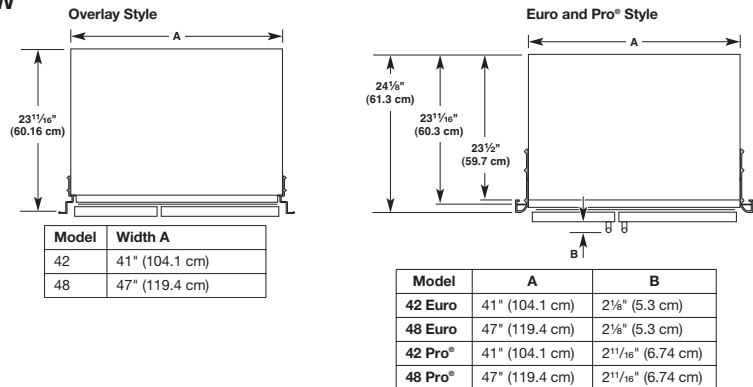

Model	Width A
42	41" (104.1 cm)
48	47" (119.4 cm)


Model	A	B
42 Euro	41" (104.1 cm)	2 ¹ / ₈ " (5.3 cm)
48 Euro	47" (119.4 cm)	2 ¹ / ₈ " (5.3 cm)
42 Pro®	41" (104.1 cm)	2 ¹¹ / ₁₆ " (6.74 cm)
48 Pro®	47" (119.4 cm)	2 ¹¹ / ₁₆ " (6.74 cm)

FRONT VIEW

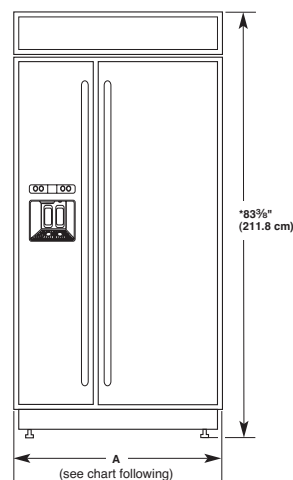


Model	Width A (Trim edge to trim edge)
42	42 ¹ / ₄ " (107.3 cm)
48	48 ¹ / ₄ " (122.6 cm)

DOOR SWING DIMENSIONS

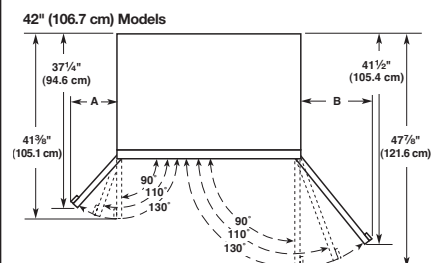

Model	A	B
Pro®	10 ³ / ₄ " (27.11 cm)	14 ¹ / ₄ " (36.11 cm)
Euro	10 ¹ / ₄ " (25.87 cm)	13 ³ / ₄ " (34.88 cm)

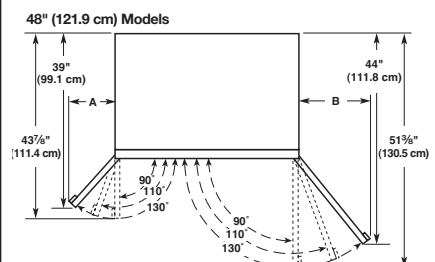

Model	A	B
Pro®	12 ³ / ₁₆ " (30.84 cm)	16 ¹ / ₄ " (41.16 cm)
Euro	11 ⁵ / ₈ " (29.43 cm)	15 ¹ / ₁₆ " (39.75 cm)