



Screwdrivers, Nut Drivers and Accessories

Offering a variety of tip types, hex sizes, shaft lengths, and handle designs, Klein has the screwdrivers and nut drivers professionals demand to get the job done with comfort and ease.


For Professionals...
Since 1857™

Introduction

Klein screwdrivers give professionals extra-quality features that have made the Klein name famous for hand tools – features that assure greater convenience, comfort and efficiency in use, plus exceptional strength and durability.

All Klein drivers are made of the highest quality tempered steel, carefully heat-treated for maximum strength. Shafts have integral flanges that provide an extra-strong, torque-proof anchor in the handle. Strong, durable black tips are forged and precision ground with square edges to fit screw openings securely. They resist slippage and provide positive turning action.

Cushion-Grip screwdrivers feature super-comfortable, sure-grip handles on top-quality blades for the professional. All Klein screwdrivers meet or exceed applicable ANSI and MIL specifications.

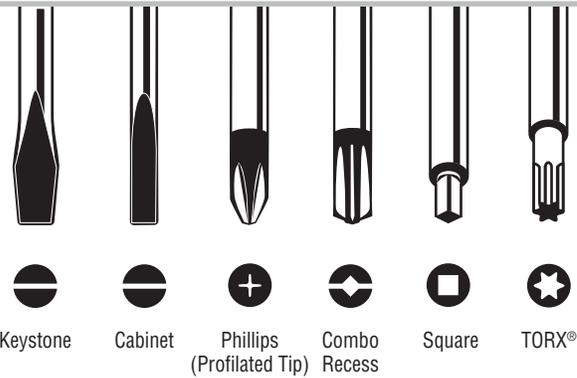

Using Screwdrivers and Nut Drivers

The size of the screw or nut and the type of opening it has determines which driver to use. Here are a few tips on how to use a driver that can be of benefit, because screwdrivers are the most often misused and abused hand tools of all.

1. Never use a driver to do another tool's job.

Using a driver as a pry bar, scraper, or a chisel can ruin the tool, spoil the work and cause injury.

2. Never push a driver beyond its capacity.

Make a pilot hole for the screw for easier driving. Use square-shank drivers for heavy work.

3. Never expose a driver to excessive heat.

Direct flame can draw the temper from the metal, weakening and possibly warping it, making it unsafe and inefficient to use.

4. Never use a driver at an angle to the screw.

Always keep the shank perpendicular to the screw head. Driving at an angle or using a point that is too small can spoil the screw or slip and damage the work.

5. Never depend on a driver's handle or covered blade to insulate you from electricity.

Plastic and Cushion-Grip handles are intended only to provide a firm, comfortable grip. Insulated blades are intended only as a protective measure against shorting out components. Only use insulated tools that are marked with the official international 1000-volt rating symbol if there is any chance that the tool will make contact with an energized source.

6. Discard damaged or worn drivers.

TORX® is a registered trademark of Acument Intellectual Properties, LLC.

Cushion-Grip Screwdrivers

Cushion-Grip handle allows for greater torque and comfort

Integral flanges inside handle provide solid, twist-resistant blade anchor

Special heat-treated shank


Precision-machined tip for exact fit

Premium chrome-plated shank for smooth feel and corrosion resistance

Meets or exceeds applicable ASME / ANSI specifications

Tip-Ident® quickly identifies the type of screwdriver and tip orientation





Cushion-Grip Screwdriver Sets

8-Piece Screwdriver Set



Additional Features:

- Includes two cabinet-tip, two keystone-tip, four Phillips-tip styles

Cat. No.	Set Contains	Weight
85078		1.7 lbs. (0.77 kg)

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length
600-4*	Keystone	1/4" (6.4 mm)	Square	4" (101.6 mm)	8-11/32" (211.9 mm)
602-6*	Keystone	5/16" (7.9 mm)	Round	6" (152.4 mm)	10-15/16" (277.8 mm)
600-1	Cabinet	5/16" (7.9 mm)	Round	1-1/2" (38.1 mm)	3-7/16" (87.3 mm)
601-3	Cabinet	3/16" (4.8 mm)	Round	3" (76.2 mm)	6-3/4" (171.5 mm)
603-3	Phillips	#1	Round	3" (76.2 mm)	6-3/4" (171.5 mm)
603-1	Phillips	#2	Round	1-1/2" (38.1 mm)	3-7/16" (87.3 mm)
603-4	Phillips	#2	Round	4" (101.6 mm)	8-1/4" (209.6 mm)
603-6	Phillips	#3	Round	6" (152.4 mm)	11" (279.4 mm)

* Heavy-duty models



85078

7-Piece Screwdriver Set



Additional Features:

- Includes three cabinet-tip, two Phillips-tip and two keystone-tip styles

Cat. No.	Set Contains	Weight
85076		1.5 lbs. (0.68 kg)

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length
600-4*	Keystone	1/4" (6.4 mm)	Square	4" (101.6 mm)	8-11/32" (211.9 mm)
602-6*	Keystone	5/16" (7.9 mm)	Round	6" (152.4 mm)	10-15/16" (277.8 mm)
601-3	Cabinet	3/16" (4.8 mm)	Round	3" (76.2 mm)	6-3/4" (171.5 mm)
601-6	Cabinet	3/16" (4.8 mm)	Round	6" (152.4 mm)	9-3/4" (247.7 mm)
605-4*	Cabinet	1/4" (6.4 mm)	Round	4" (101.6 mm)	8-11/32" (211.9 mm)
603-3	Phillips	#1	Round	3" (76.2 mm)	6-3/4" (171.5 mm)
603-4	Phillips	#2	Round	4" (101.6 mm)	8-1/4" (209.6 mm)

* Heavy-duty models



85076

7-Piece Multiple-Application Screwdriver Set



Additional Features:

- Specialty set for a wide variety of applications
- Includes two cabinet-tip, one Phillips-tip, two keystone-tip, one rotary and one screw-holding screwdriver

Cat. No.	Set Contains	Weight
85077		1.7 lbs. (0.77 kg)

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length
600-4*	Keystone	1/4" (6.4 mm)	Square	4" (101.6 mm)	8-11/32" (211.9 mm)
602-6*	Keystone	5/16" (7.9 mm)	Round	6" (152.4 mm)	10-15/16" (277.8 mm)
601-6	Cabinet	3/16" (4.8 mm)	Round	6" (152.4 mm)	9-3/4" (247.7 mm)
605-6*	Cabinet	1/4" (6.4 mm)	Round	6" (152.4 mm)	10-11/32" (262.7 mm)
670-6	Cabinet	3/16" (4.8 mm)	Round Rapi-Drive®	6" (152.4 mm)	9-3/4" (247.7 mm)
K36	Slotted	1/4" (6.4 mm)	Round	6" (152.4 mm)	9-3/4" (247.7 mm)
603-4	Phillips	#2	Round	4" (101.6 mm)	8-1/4" (209.6 mm)

* Heavy-duty models



85077



Cushion-Grip Screwdriver Sets

6-Piece Screwdriver Set



Additional Features:

- Includes one cabinet-tip, two keystone-tip and three Phillips-tip styles

Cat. No.	Set Contains	Weight
85074		1.5 lbs. (0.68 kg)

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length
600-4*	Keystone	1/4" (6.4 mm)	Square	4" (101.6 mm)	8-11/32" (211.9 mm)
600-6*	Keystone	5/16" (7.9 mm)	Square	6" (152.4 mm)	10-15/16" (277.8 mm)
601-3	Cabinet	3/16" (4.8 mm)	Round	3" (76.2 mm)	6-3/4" (171.5 mm)
603-3	Phillips	#1	Round	3" (76.2 mm)	6-3/4" (171.5 mm)
603-4	Phillips	#2	Round	4" (101.6 mm)	8-1/4" (209.6 mm)
603-6	Phillips	#3	Round	6" (152.4 mm)	11" (279.4 mm)

* Heavy-duty models



85074

5-Piece Screwdriver Set



Additional Features:

- Includes two cabinet-tip, two keystone-tip and one Phillips-tip styles

Cat. No.	Set Contains	Weight
85075		1.3 lbs. (0.59 kg)

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length
602-6*	Keystone	5/16" (7.9 mm)	Round	6" (152.4 mm)	10-15/16" (277.8 mm)
600-4*	Keystone	1/4" (6.4 mm)	Square	4" (101.6 mm)	8-11/32" (211.9 mm)
601-6	Cabinet	3/16" (4.8 mm)	Round	6" (152.4 mm)	9-3/4" (247.7 mm)
605-6*	Cabinet	1/4" (6.4 mm)	Round	6" (152.4 mm)	10-11/32" (262.7 mm)
603-4	Phillips	#2	Round	4" (101.6 mm)	8-1/4" (209.6 mm)

* Heavy-duty models



85075

4-Piece Screwdriver Set



Additional Features:

- Includes one each: Phillips-tip, keystone-tip, square and cabinet-tip styles

Cat. No.	Set Contains	Weight
85105		1.5 lbs. (0.68 kg)

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length
600-6	Keystone	5/16" (7.9 mm)	Square	6" (152.4 mm)	10-15/16" (277.8 mm)
600-4*	Keystone	1/4" (6.4 mm)	Square	4" (101.6 mm)	8-11/32" (211.9 mm)
601-6	Cabinet	3/16" (4.8 mm)	Round	6" (152.4 mm)	9-3/4" (247.7 mm)
603-4	Phillips	#2	Round	4" (101.6 mm)	8-1/4" (209.6 mm)

* Heavy-duty model



85105

4-Piece Miniature Screwdriver Set



Additional Features:

- Precision tips for exact fit and rigorous applications


Cat. No.	Set Contains	Weight
85484		2.2 oz. (62 g)

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length
604-3	Phillips	#0	Round	3" (76.2 mm)	5-3/4" (146.1 mm)
606-2	Keystone	1/16" (1.59 mm)	Round	2" (50.8 mm)	4-3/4" (120.7 mm)
607-3	Cabinet	3/32" (2.4 mm)	Round	3" (76.2 mm)	5-3/4" (146.1 mm)
608-3	Cabinet	1/8" (3.2 mm)	Round	3" (76.2 mm)	5-3/4" (146.1 mm)



85484





Cushion-Grip Screwdriver Sets

5-Piece Electronics Screwdriver Set



Additional Features:

- Rotating cap for optimum and precise control when working on small equipment
- Includes professional custom carrying case

Cat. No.	Set Contains	Weight
85614		12.8 oz. (363 g)

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length
614-2	Cabinet	1/16" (1.59 mm)	Round	2" (50.8 mm)	5-1/2" (139.7 mm)
614-3	Cabinet	3/32" (2.4 mm)	Round	3" (76.2 mm)	6-1/2" (165.1 mm)
614-4	Cabinet	1/8" (3.2 mm)	Round	4" (101.6 mm)	7-1/2" (190.5 mm)
614-6	Cabinet	1/8" (3.2 mm)	Round	6" (152.4 mm)	9-1/2" (241.3 mm)
613-3	Phillips	#0	Round	3" (76.2 mm)	6-1/2" (165.1 mm)



85614

5-Piece TORX® Screwdriver Set



Additional Features:

- TORX® drive systems transmit more torque to the work and reduce slippage, saving fasteners

Cat. No.	Set Contains	Weight
19555		1.2 lbs. (0.54 kg)

Cat. No.	Tip Size	Color Code	Shank Type	Shank Length	Overall Length
19542	T15	Yellow	Round	4" (101.6 mm)	8-5/16" (211.1 mm)
19543	T20	Green	Round	4" (101.6 mm)	8-5/16" (211.1 mm)
19544	T25	Blue	Round	4" (101.6 mm)	8-5/16" (211.1 mm)
19545	T27	Brown	Round	4" (101.6 mm)	8-5/16" (211.1 mm)
19546	T30	Red	Round	4" (101.6 mm)	8-5/16" (211.1 mm)

TORX® is a registered trademark of Acument Intellectual Properties, LLC.



19555

4-Piece Square-Recess Screwdriver Set



Additional Features:

- Works on most combination head receptacle, switch and panel screws

Cat. No.	Set Contains	Weight
85664		1.5 lbs. (0.68 kg)

Cat. No.	Tip Type	Tip Size	Shank Type	Color Code	Shank Length	Overall Length
660	Square-Recess	#0	Round	Yellow	4" (101.6 mm)	7-3/4" (196.9 mm)
661	Square-Recess	#1	Round	Green	4" (101.6 mm)	7-3/4" (196.9 mm)
662	Square-Recess	#2	Round	Red	4" (101.6 mm)	8-1/4" (209.6 mm)
663	Square-Recess	#3	Round	Black	4" (101.6 mm)	8-1/4" (209.6 mm)



85664

2-Piece Combo-Tip Screwdriver Set



Additional Features:

- #1 and #2 combination tips are precision machined for combination head screws

Cat. No.	Set Contains	Weight
32378		1.5 lbs. (0.68 kg)

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length
7314	Combo	#1	Round	4" (101.6 mm)	8-11/32" (211.9 mm)
7324	Combo	#2	Round	4" (101.6 mm)	8-11/32" (211.9 mm)



32378



Cushion-Grip Screwdriver Sets

2-Piece 10" Long Blade Screwdriver Set

Additional Features:

- Phillips-tip is precision-machined to provide a more consistent geometric symmetry than conventional Phillips-tip screwdrivers
- Precision-ground narrow cabinet-tip permits blade access where space is limited
- Ideal for hard-to-reach places where added length is necessary



85072



Cat. No.	Set Contains	Weight
85072		11.2 oz. (318 g)

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length
603-10	Phillips	#2	Round	10" (254.0 mm)	14-5/16" (363.5 mm)
605-10	Cabinet	1/4" (6.4 mm)	Round	10" (254.0 mm)	14-11/32" (364.3 mm)

2-Piece Demolition Screwdriver Set

Additional Features:

- Engineered, manufactured and tested for prying, chiseling and punching
- Plated metal strike cap to protect handle from hammer blows
- Heat treated metal shaft runs complete length of handle to metal strike cap to transfer metal strike force



603-4DD



Cat. No.	Set Contains	Weight
32008		11.2 oz. (318 g)

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length
602-4DD	Phillips	#2	Round	4" (101.6 mm)	9" (228.6 mm)
6034DD	Cabinet	1/4" (6 mm)	Round	7" (177.8 mm)	9" (228.6 mm)

2-Piece Stubby Screwdriver Set

Additional Features:

- For work in close quarters



85071



Cat. No.	Set Contains	Weight
85071		4.8 oz. (136 g)

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length
600-1	Cabinet	5/16" (7.9 mm)	Round	1-1/2" (38.1 mm)	3-7/16" (87.3 mm)
603-1	Phillips	#2	Round	1-1/2" (38.1 mm)	3-7/16" (87.3 mm)

Adjustable Length Screwdriver Set

Additional Features:

- Removable shank adjusts within 4" to 8" (102-208 mm) range for numerous length combinations
- Blades feature two tips for multiple screwdrivers in one tool
- Proprietary system securely holds blade - as durable as a traditional Klein fixed blade screwdriver
- Press down to extend or lengthen the shank
- Push up to retract or shorten the shank
- Components sold separately



32751




US Patent: 6,561,523

Cat. No.	Description	Tip Size	Shank Length	Overall Length	Weight
32751	Adjustable Screwdriver, #2 Ph, 1/4" SI	#2 Phillips and 1/4" (6.4 mm) Slotted	4" to 8" (101.6 to 203.2 mm)	13-3/8" (339.7 mm)	6.4 oz. (181 g)
32708	Adjustable Screwdriver, Sq #1, #2	#1 Square and #2 Square	4" to 8" (101.6 to 203.2 mm)	13-3/8" (339.7 mm)	6.4 oz. (181 g)
32709	Adj. Length Blade, Sq #1, #2	#1 Square and #2 Square	7-3/4" (196.9 mm)	9" (228.6 mm)	1.6 oz. (45 g)
32713	Adj. Length Blade, #1 PH, 3/16" Slotted	#1 Phillips and 3/16" (4.8 mm) Slotted	7-3/4" (196.9 mm)	9" (228.6 mm)	1.6 oz. (45 g)
32618	Adj. Length Blade, #2, 1/4" Slotted	#2 Phillips, 1/4" (6.4 mm) Slotted	4" to 8" (101.6 to 203.2 mm)	9-1/8" (231.8 mm)	4.0 oz. (113 g)
32619	Adjustable Length Screwdriver Handle	—	—	5-3/8" (136.5 mm)	3.2 oz. (91 g)

Cat. No.	Description	Includes	Weight
32715	Adjustable Length Replacement Blade Set	Cat. Nos. 32713, 32618, 32709	1.6 oz. (45 g)





Cushion-Grip Screwdrivers

Cushion-Grip Screwdrivers



601-6

Additional Features:

- Narrow cabinet-tip permits blade access where space is limited
- Precision machined combo-tip designed for combination head screws
- Precision machined Phillips tip provides a more consistent geometric symmetry than conventional Phillips screwdrivers to accurately fit and torque without slippage

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length	Weight
600-1	Cabinet	5/16" (7.9 mm)	Round	1-1/2" (38.1 mm)	3-7/16" (87.3 mm)	1.6 oz. (45 g)
601-4	Cabinet	3/16" (4.8 mm)	Round	4" (101.6 mm)	7-3/4" (196.9 mm)	2.4 oz. (68 g)
601-6	Cabinet	3/16" (4.8 mm)	Round	6" (152.4 mm)	9-3/4" (247.7 mm)	2.4 oz. (68 g)
601-8	Cabinet	3/16" (4.8 mm)	Round	8" (203.2 mm)	11-3/4" (298.5 mm)	3.2 oz. (91 g)
601-10	Cabinet	3/16" (4.8 mm)	Round	10" (254.0 mm)	13-3/4" (349.3 mm)	3.2 oz. (91 g)
605-4*	Cabinet	1/4" (6.4 mm)	Round	4" (101.6 mm)	8-11/32" (211.9 mm)	4.0 oz. (113 g)
605-6*	Cabinet	1/4" (6.4 mm)	Round	6" (152.4 mm)	10-11/32" (262.7 mm)	4.8 oz. (136 g)
605-8*	Cabinet	1/4" (6.4 mm)	Round	8" (203.2 mm)	12-11/32" (313.5 mm)	4.8 oz. (136 g)
605-10*	Cabinet	1/4" (6.4 mm)	Round	10" (254.0 mm)	14-11/32" (364.3 mm)	5.6 oz. (159 g)
7314	Combo	#1	Round	4" (101.6 mm)	8-11/32" (211.9 mm)	4.8 oz. (136 g)
7324	Combo	#2	Round	4" (101.6 mm)	8-11/32" (211.9 mm)	4.8 oz. (136 g)
603-1	Phillips	#2	Round	1-1/2" (38.1 mm)	3-7/16" (87.3 mm)	1.6 oz. (45 g)
603-3	Phillips	#1	Round	3" (76.2 mm)	6-3/4" (171.5 mm)	2.4 oz. (68 g)
603-4	Phillips	#2	Round	4" (101.6 mm)	8-1/4" (209.6 mm)	4.0 oz. (113 g)
603-6	Phillips	#3	Round	6" (152.4 mm)	11" (279.4 mm)	5.6 oz. (159 g)
603-7	Phillips	#2	Round	7" (177.8 mm)	11-5/16" (287.3 mm)	4.8 oz. (136 g)
603-10	Phillips	#2	Round	10" (254.0 mm)	14-5/16" (363.5 mm)	5.6 oz. (159 g)

* Heavy-duty models

Keystone-Tip Screwdrivers - Heavy-Duty



600-4

Additional Features:

- Heavy-duty square shank and hex bolster allows wrench-assisted turning
- Bolster reinforces shank for hard use



602-6

Cat. No.	Tip Size	Shank Type	Shank Length	Overall Length	Weight
Bolster					
600-4	1/4" (6.4 mm)	Square	4" (101.6 mm)	8-11/32" (211.9 mm)	4.0 oz. (113 g)
600-6	5/16" (7.9 mm)	Square	6" (152.4 mm)	10-15/16" (277.8 mm)	6.4 oz. (181 g)
600-8	3/8" (9.52 mm)	Square	8" (203.2 mm)	13-7/16" (341.3 mm)	10.4 oz. (295 g)
600-12	1/2" (12.7 mm)	Square	12" (304.8 mm)	17-7/16" (443.0 mm)	12.8 oz. (363 g)
Hex Bolster					
602-3	7/32" (5.6 mm)	Round	3" (76.2 mm)	6-3/4" (171.5 mm)	2.4 oz. (68 g)
602-4	1/4" (6.4 mm)	Round	4" (101.6 mm)	8-11/32" (211.9 mm)	4.0 oz. (113 g)
602-6	5/16" (7.9 mm)	Round	6" (152.4 mm)	10-15/16" (277.8 mm)	5.6 oz. (159 g)
602-8	3/8" (9.52 mm)	Round	8" (203.2 mm)	13-7/16" (341.3 mm)	8.8 oz. (249 g)
602-10	3/8" (9.52 mm)	Round	10" (254.0 mm)	15-7/16" (392.1 mm)	9.6 oz. (272 g)
602-12	3/8" (9.52 mm)	Round	12" (304.8 mm)	17-7/16" (443.0 mm)	10.4 oz. (295 g)



Cushion-Grip Screwdrivers

Color-Coded Cushion-Grip Screwdrivers



660

Additional Features:

- Color-coded handle ends for quick and easy identification
- Chrome plated shank for corrosion resistance
- TORX® tip drive cuts slippage, saves fasteners and transmits more torque to the work

Cat. No.	Tip Type	Tip Size	Shank Type	Color Code	Shank Length	Overall Length	Weight
660	Square-Recess	#0	Round	Yellow	4" (101.6 mm)	7-3/4" (196.9 mm)	3.2 oz. (91 g)
661	Square-Recess	#1	Round	Green	4" (101.6 mm)	7-3/4" (196.9 mm)	3.2 oz. (91 g)
662	Square-Recess	#2	Round	Red	4" (101.6 mm)	8-1/4" (209.6 mm)	4.8 oz. (136 g)
663	Square-Recess	#3	Round	Black	4" (101.6 mm)	8-1/4" (209.6 mm)	4.8 oz. (136 g)
665	Square-Recess	#1	Round	Green	8" (203.2 mm)	11-3/4" (298.5 mm)	4.8 oz. (136 g)
666	Square-Recess	#2	Round	Red	8" (203.2 mm)	12-1/4" (311.2 mm)	6.4 oz. (181 g)
667	Square-Recess	#3	Round	Black	8" (203.2 mm)	12-1/4" (311.2 mm)	6.4 oz. (181 g)
668	Square-Recess	#1	Round	Green	1-1/2" (38.1 mm)	3-7/16" (87.3 mm)	2.4 oz. (68 g)
669	Square-Recess	#0	Round	Yellow	4" (101.6 mm)	3-7/16" (87.3 mm)	2.4 oz. (68 g)
19542	TORX®	T15	Round	Yellow	4" (101.6 mm)	8-5/16" (211.1 mm)	3.2 oz. (91 g)
19543	TORX®	T20	Round	Green	4" (101.6 mm)	8-5/16" (211.1 mm)	4.0 oz. (113 g)
19544	TORX®	T25	Round	Blue	4" (101.6 mm)	8-5/16" (211.1 mm)	4.0 oz. (113 g)
19545	TORX®	T27	Round	Brown	4" (101.6 mm)	8-5/16" (211.1 mm)	4.0 oz. (113 g)
19546	TORX®	T30	Round	Red	4" (101.6 mm)	8-5/16" (211.1 mm)	4.0 oz. (113 g)

Electronics Screwdrivers



614-6

Additional Features:

- Rotating cap for optimum and precise control

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length	Weight
613-3	Phillips	#0	Round	3" (76.2 mm)	6-1/2" (165.1 mm)	0.8 oz. (23 g)
614-2	Cabinet	1/16" (1.59 mm)	Round	2" (50.8 mm)	5-1/2" (139.7 mm)	0.8 oz. (23 g)
614-3	Cabinet	3/32" (2.4 mm)	Round	3" (76.2 mm)	6-1/2" (165.1 mm)	0.8 oz. (23 g)
614-4	Cabinet	1/8" (3.2 mm)	Round	4" (101.6 mm)	7-1/2" (190.5 mm)	0.8 oz. (23 g)
614-6	Cabinet	1/8" (3.2 mm)	Round	6" (152.4 mm)	9-1/2" (241.3 mm)	0.8 oz. (23 g)

Miniature Screwdrivers




608-6

Additional Features:

- Precision tips for exact fit and rigorous applications

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length	Weight
604-3	Phillips	#0	Round	3" (76.2 mm)	5-3/4" (146.1 mm)	0.6 oz. (17 g)
606-2	Keystone	1/16" (1.59 mm)	Round	2" (50.8 mm)	4-3/4" (120.7 mm)	0.5 oz. (14 g)
607-2	Cabinet	3/32" (2.4 mm)	Round	2" (50.8 mm)	4-3/4" (120.7 mm)	0.5 oz. (14 g)
607-3	Cabinet	3/32" (2.4 mm)	Round	3" (76.2 mm)	5-3/4" (146.1 mm)	0.6 oz. (17 g)
607-4	Cabinet	3/32" (2.4 mm)	Round	4" (101.6 mm)	6-3/4" (171.5 mm)	0.6 oz. (17 g)
608-2	Cabinet	1/8" (3.2 mm)	Round	2" (50.8 mm)	4-3/4" (120.7 mm)	0.5 oz. (14 g)
608-3	Cabinet	1/8" (3.2 mm)	Round	3" (76.2 mm)	5-3/4" (146.1 mm)	0.6 oz. (17 g)
608-4	Cabinet	1/8" (3.2 mm)	Round	4" (101.6 mm)	6-3/4" (171.5 mm)	0.8 oz. (23 g)
608-6	Cabinet	1/8" (3.2 mm)	Round	6" (152.4 mm)	8-3/4" (222.3 mm)	0.8 oz. (23 g)
608-8	Cabinet	1/8" (3.2 mm)	Round	8" (203.2 mm)	10-3/4" (273.1 mm)	0.8 oz. (23 g)
608-10	Cabinet	1/8" (3.2 mm)	Round	10" (254.0 mm)	12-3/4" (323.9 mm)	0.8 oz. (23 g)





Cushion-Grip Screwdrivers

Coated Screwdrivers



Additional Features:

- Plastic coated for circuit protection only. NOT INSULATED
- Special plastic coating resists cutting, cracking and chipping
- Thin coating permits use in confined areas



620-4

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length	Weight
620-3	Cabinet	3/16" (4.8 mm)	Round	3" (76.2 mm)	6-3/4" (171.5 mm)	2.4 oz. (68 g)
621-6	Cabinet	3/16" (4.8 mm)	Round	6" (152.4 mm)	9-3/4" (247.7 mm)	3.2 oz. (91 g)
621-8	Cabinet	3/16" (4.8 mm)	Round	8" (203.2 mm)	11-3/4" (298.5 mm)	3.2 oz. (91 g)
620-4*	Cabinet	1/4" (6.4 mm)	Round	4" (101.6 mm)	8-11/32" (211.9 mm)	3.2 oz. (91 g)
620-6*	Cabinet	5/16" (7.9 mm)	Round	6" (152.4 mm)	10-15/16" (277.8 mm)	6.4 oz. (181 g)
620-8*	Cabinet	3/8" (9.52 mm)	Round	8" (203.2 mm)	13-7/16" (341.3 mm)	9.6 oz. (272 g)

* Heavy-duty models

Demolition Screwdrivers



Additional Features:

- Engineered, manufactured and tested for prying, chiseling and punching
- Plated metal strike cap to protect handle from hammer blows
- Heat treated metal shaft runs complete length of handle to metal strike cap to transfer metal strike force



602-7DD

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length	Weight
602-4DD	Phillips	#2	Round	4" (101.6 mm)	9" (228.6 mm)	5.9 oz. (168 g)
602-7DD	Keystone	5/16" (7.9 mm)	Round	7" (177.8 mm)	12-3/8" (314.3 mm)	9.0 oz. (255 g)
6034DD	Cabinet	1/4" (6.4 mm)	Round	7" (177.8 mm)	9" (228.6 mm)	5.9 oz. (168 g)


Rapi-Drive™ Cushion-Grip Screwdrivers

Rapi-Drive™ Screwdrivers



Additional Features:

- Crank-action handle spins screws fast with one hand
- Saves time and effort, especially on long-threaded screws in switch plates, light fixtures, etc.

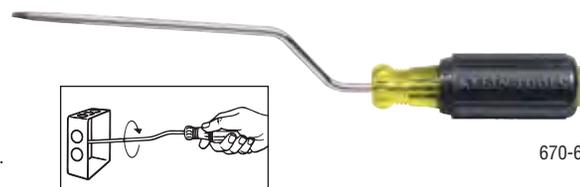

670-6

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length	Weight
670-3	Cabinet	3/16" (4.8 mm)	Round Rapi-Drive®	4" (101.6 mm)	7-3/4" (196.9 mm)	2.4 oz. (68 g)
670-6	Cabinet	3/16" (4.8 mm)	Round Rapi-Drive®	6" (152.4 mm)	9-3/4" (247.7 mm)	3.2 oz. (91 g)
671-6	Cabinet	1/4" (6.4 mm)	Round Rapi-Drive®	6" (152.4 mm)	9-3/4" (247.7 mm)	3.2 oz. (91 g)
682-6	Phillips	#2	Round Rapi-Drive®	6" (152.4 mm)	9-3/4" (247.7 mm)	4.0 oz. (113 g)
681-6	Phillips	#1	Round Rapi-Drive®	6" (152 mm)	9-3/4" (248 mm)	0.20 lbs. (0.1 kg)
691-6	Square	#1	Round Rapi-Drive®	6" (152 mm)	9-3/4" (248 mm)	0.35 lbs. (0.2 kg)

2-in-1 Rapi-Drive™



Additional Features:

- Interchangeable bit holder allows quick switching between tip styles and works with other standard size bits
- Crank-action handle allows you to spin screws fast with one hand
- Blast finish bit provides firm grip on fasteners to reduce cam out



67100

Cat. No.	Tip Type	Shank Length	Shank Type	Overall Length	Weight
67100	3/16" (4.8 mm) Slotted, #2 Phillips	6" (152.4 mm)	Round Rapi-Drive®	9-3/4" (247.7 mm)	4.2 oz. (119 g)



Specialty Cushion-Grip Screwdrivers

2-in-1 Hex Head Screwdriver



65064

- 1/4" and 5/16" six-point hex nut driver
- Powerful magnets for maximum fastener retention
- Solid build quality; feels like a conventional nut driver
- Color coded bands for easy identification
- Wrench-assist to help remove stubborn fasteners

Cat. No.	Tip Type	Tip Size	Shank Length	Overall Length	Weight
65064 NEW!	Hex	1/4" x 5/16" (6.4 x 7.9 mm)	3-5/8" (92.1 mm)	8" (203.2 mm)	7.2 oz. (204 g)

Screw-Holding Screwdrivers



32215

- Starts and drives screws with one hand when working in hard-to-reach spaces

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length	Weight
32215	Cabinet	1/4" (6.4 mm)	Round	7" (177.8 mm)	11-1/4" (285.8 mm)	5.1 oz. (145 g)
32216	Phillips	#2	—	7" (177.8 mm)	11-1/4" (285.8 mm)	5.1 oz. (145 g)

Terminal Block Screwdriver



612-4

Additional Features:

- Precision-machined cabinet tip provides exact fit for terminal block screws
- Tip is up to 19% stronger than competitors and provides 76% higher torque value than the required ASME B107 Standard

Cat. No.	Tip Type	Shank Type	Tip Size	Shank Length	Overall Length	Weight
612-4	Cabinet	Round	1/8" (3.2 mm)	4" (101.6 mm)	7-3/4" (196.9 mm)	2.4 oz. (68 g)

Wire Bending Screwdrivers




605-6B

Additional Features:

- Metal stud offers a convenient and easy way to bend, loop and connect solid wire when installing outlets and switches

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length	Bends AWG Gauges	Weight
605-4B	Cabinet	1/4" (6.4 mm)	Round	4" (101.6 mm)	8-11/32" (211.9 mm)	Nos. 10, 12, 14	4.0 oz. (113 g)
605-6B	Cabinet	1/4" (6.4 mm)	Round	6" (152.4 mm)	10-11/32" (262.7 mm)	Nos. 10, 12, 14	4.8 oz. (136 g)
603-3B	Phillips	#1	Round	3" (76.2 mm)	6-3/4" (171.5 mm)	Nos. 12 and 14	2.4 oz. (68 g)
603-4B	Phillips	#2	Round	4" (101.6 mm)	8-5/16" (211.1 mm)	Nos. 10, 12, 14	4.0 oz. (113 g)





Conduit Reamers

Conduit-Fitting and Reaming Screwdriver

- Hooded-blade design keeps tip from slipping out of screws, especially when tightening hard-to-reach conduit fittings. Thicker hood is designed for rugged use
- Reams and smooths 1/2" (13 mm), 3/4" (19 mm), and 1" (25 mm) thin-wall conduit ends to protect wire
- Reams both the inside and outside of the conduit at the same time
- Longer Cushion-Grip handle provides comfort and more torque for reaming
- Replaceable reaming blade is now held in place with a 1/6" (1.5 mm) set screw



85191

Cat. No.	Tip Size	Shank Length	Overall Length	Weight
85191	5/16" (7.9 mm)	2-1/2" (63.5 mm)	7-1/2" (190.5 mm)	8.0 oz. (227 g)

Replacement Parts

Cat. No.	Item	Weight
19353	Conduit Reamer Replacement Blade Kit	0.16 oz. (4.5 g)

Conduit Reamer

- Locks onto screwdrivers; reams and smooths thin-wall conduit
- Reams ID and OD at the same time
- Two set-screws for round- and square-shank screwdrivers
- Fits up to 3/8" (10 mm) keystone-tip screwdrivers
- NOT for use on power tools



19352

Cat. No.	Conduit Capacity	Weight
19352	1/2" (12.7 mm), 3/4" (19.1 mm), 1" (25.4 mm)	3.2 oz. (91 g)

Replacement Parts

Cat. No.	Item	Weight
19353	Conduit Reamer Replacement Blade Kit	0.16 oz. (4.5 g)

Power Conduit Reamer

IMPACT RATED!

- Ream 1/2" (13 mm), 3/4" (19 mm), and 1" (25 mm) conduit and install fittings in a fraction of the time
- Designed to fit into power drill chucks and quick release adapters; impact ready
- Includes precision engineered replaceable reaming blade
- Replacement blades are available and the only approved blade for use in this tool
- Replacement bits are available but any standard 1/4" hex bit will work

Precision engineered
replaceable reaming blade

1/4" hex
quick connect



85091

4x Stronger
Bit Retention



NOTE: Read and follow safety instructions in power tool owner's manual.

Cat. No.	Item	Weight
85091	Conduit Reamer Drill Head for 1/2", 3/4", 1"	5.3 oz. (150 g)

Replacement Parts

Cat. No.	Item	Weight
19353	Conduit Reamer Replacement Blade Kit	0.16 oz. (4.5 g)



Multi-Bit Cushion-Grip Screwdrivers/Nut Drivers

15-in-1 Screwdriver/Nut Drivers

- Multi-bit driver includes 14 different screwdriver tips plus a 1/4" (6.4 mm) nut driver
- Internal storage for screwdriver bits



32290



Internal Storage



Cat. No.	Description	Shank Length	Slotted Bits	Phillips Bits	Square Bits	Nut Driver Sizes	Hex Bits	TORX Bits	Combo Bits	Other Bits	Overall Length	Weight
32290 NEW!	Multi-Bit Screwdriver with Storage 15 Pc	4" (101.6 mm)	4 mm, 6 mm	#0, #1, #2, #3	#1, #2	1/4"	—	#10, #15, #20, #25	#1, #2	—	8-1/2" (215.9 mm)	8.0 oz. (227 g)
32291 NEW!	Tamperproof Multi-Bit Screwdriver 15 Pc	4" (101.6 mm)	—	—	—	1/4"	Pins: 1/8", 9/64", 5/32", 3/16"	Pins: #10, #15, #20, #25, #27, #30	—	Spanners: #6, #8, #10, #12	8-1/2" (215.9 mm)	8.0 oz. (227 g)
32292 NEW!	HVAC Multi-Bit Screwdriver 15 Pc	4" (101.6 mm)	4 mm, 6 mm	#0, #1, #2, #3	#1, #2	1/4"	—	#10, #15, #20, #25	—	Schrader® Valve Insertion, Core Removal	8-1/2" (215.9 mm)	8.0 oz. (227 g)


Schrader® is a registered trademark of Schrader-Bridgeport International, Inc.

11-in-1 Screwdriver/Nut Driver with Schrader® Valve Removal/Installation Bit

- Great for HVAC and other industrial applications
- Includes unique style bit for installation/removal of common TR-4 Schrader® valves and aggressive thread extractor tip for backing out broken cores



32527



Cat. No.	Shank Length	Slotted Bits	Phillips Bits	Square Bits	Combo Bits	Nut Driver Sizes	Other Bits	Overall Length	Weight
32527	4" (101.6 mm)	1/4" (6.4 mm) and 3/16" (4.8 mm)	#1 and #2	#1 and #2	—	3/8", 5/16" and 1/4"	Schrader® Valve Core Removal/Installation - Extractor	7-3/4" (196.9 mm)	7.0 oz. (198 g)

Schrader® is a registered trademark of Schrader-Bridgeport International, Inc.

11-in-1 Combo-Tip Screwdriver/Nut Driver


- Precision machined tip designed for combination head screws



32505



Cat. No.	Shank Length	Slotted Bits	Phillips Bits	Square Bits	Combo Bits	Nut Driver Sizes	Overall Length	Weight
32505	4" (101.6 mm)	1/4" (6.4 mm), 5/16" (7.9 mm)	#1 and #2	#1 and #2	#1 and #2	1/4", 5/16" 3/8"	7-1/4" (184.2 mm)	8.0 oz. (227 g)



Multi-Bit Cushion-Grip Screwdrivers/Nut Drivers

Heavy-Duty Multi-Bit Screwdriver/Nut Driver

- Superior torque for tough applications
- Interchangeable shaft holds six universal tips; converts to three nut driver sizes and one hex driver
- Strong, heat-treated nut drivers for improved torque



32557



Cat. No.	Shank Length	Slotted Bits	Phillips Bits	Square Bits	Nut Driver Sizes	Hex Bits	Overall Length	Weight
32557	2-61/64" (75.0 mm)	3/16" (4.8 mm) and 1/4" (6.4 mm)	#1 and #2	#1 and #2	1/4", 5/16" and 3/8"	3/8"	7-57/64" (200.4 mm)	7.7 oz. (218 g)

Ratcheting Multi-Bit Screwdriver/Nut Driver

- High torque 3-way ratcheting mechanism, forward, reverse and locked positions for tough applications
- Interchangeable shaft holds six universal tips; converts to three nut driver sizes and one hex driver
- Strong, heat-treated nut drivers for improved torque



32558



Cat. No.	Shank Length	Slotted Bits	Phillips Bits	Square Bits	Nut Driver Sizes	Hex Bits	Overall Length	Weight
32558	2-61/64" (75.0 mm)	3/16" (4.8 mm) and 1/4" (6.4 mm)	#1 and #2	#1 and #2	1/4", 5/16" and 3/8"	3/8"	7-57/64" (200.4 mm)	7.7 oz. (218 g)

6-in-1 Ratcheting Stubby Screwdrivers

- Ratcheting mechanism allows user to work faster with more efficiency

NEW!



32593



Cat. No.	Shank Length	Slotted Bits	Phillips Bits	Square Bits	Nut Driver Sizes	Overall Length	Weight
32593 NEW!	1-19/64" (32.9 mm)	1/4" (6.4 mm) and 3/4" (19.1 mm)	#1 and #2	—	1/4" and 5/16"	3-1/2" (88.9 mm)	1.6 oz. (45 g)
32594 NEW!	1-19/64" (32.9 mm)	3/16" (4.8 mm)	#2	#1 and #2	1/4" and 5/16"	3-1/2" (88.9 mm)	1.6 oz. (45 g)

Extended-Reach Multi-Bit Screwdrivers/Nut Drivers

- Interchangeable shaft holds four universal tips and converts to two nut driver sizes
- Extended shafts and blades provide 39% longer reach
- Small diameter shaft for comfortable grip and quick, easy turning



32559



Cat. No.	Shank Length	Slotted Bits	Phillips Bits	Square Bits	Nut Driver Sizes	Overall Length	Weight
32559	4-7/64" (104.4 mm)	3/16" (4.8 mm) and 1/4" (6.4 mm)	#1 and #2	—	1/4" and 5/16"	9-7/64" (231.4 mm)	6.6 oz. (187 g)
32560	4-7/64" (104.4 mm)	1/4" (6.4 mm)	#2	#1 and #2	1/4" and 5/16"	9-7/64" (231.4 mm)	6.6 oz. (187 g)



Multi-Bit Cushion-Grip Screwdrivers/Nut Drivers

Multi-Bit Screwdriver/Nut Drivers

- Integrated screwdriver/nut driver shaft holds popular tips and converts nut driver sizes



32476



Cat. No.	Description	Shank Length	Slotted Bits	Phillips Bits	Square Bits	TORX® Bits	Nut Driver Sizes	Overall Length	Weight
32476	5-in-1 Screwdriver/ Nut Driver	4" (101.6 mm)	9/32" (7.1 mm) and 3/16" (4.8 mm)	#1 and #2	—	—	5/16"	7-3/4" (196.9 mm)	7.7 oz. (218 g)
32477	10-in-1 Screwdriver/ Nut Driver	4" (101.6 mm)	1/4" (6.4 mm) and 3/16" (4.8 mm)	#1 and #2	#1 and #2	T10 and T15	5/16" and 1/4"	7-3/4" (196.9 mm)	8.0 oz. (227 g)
32500	11-in-1 Screwdriver/ Nut Driver	4" (101.6 mm)	1/4" (6.4 mm) and 3/16" (4.8 mm)	#1 and #2	#1 and #2	T10 and T15	3/8", 5/16" and 1/4"	7-1/4" (184.2 mm)	8.0 oz. (227 g)

TORX® is a registered trademark of Acument Intellectual Properties, LLC.

Stubby Multi-Bit Screwdriver/Nut Driver

- Compact design features standard 1-1/4" (32 mm) shaft allowing easy access to tight work spaces
- Shaft holds four universal tips and converts to two nut driver sizes



32561



US Patent: D684,836

Cat. No.	Shank Length	Slotted Bits	Phillips Bits	Square Bits	Nut Driver Sizes	Overall Length	Weight
32561	1-17/64" (32.1 mm)	3/16" (4.8 mm) and 1/4" (6.4 mm)	#1 and #2	—	1/4" and 5/16"	3-13/32" (86.5 mm)	2.6 oz. (73 g)
32562	1-17/64" (32.1 mm)	3/16" (4.8 mm)	#2	#1 and #2	1/4" and 5/16"	3-13/32" (86.5 mm)	2.6 oz. (73 g)

4-in-1 Electronics Precision Screwdriver

- Four different tips in one tool
- Rotating cap for optimum and precise control
- Heat treated precision ground tip for greater strength
- Cushion-Grip handles for maximum comfort when working on small equipment

NEW!



32581



Cat. No.	Shank Length	Slotted Bits	Phillips Bits	Overall Length	Weight
32581 NEW!	2-51/64" (71.0 mm)	1/8" (3.2 mm) and 3/32" (2.4 mm)	#0 and #00	6-1/2" (165.1 mm)	1.1 oz. (31 g)

Multi-Bit Tap Tool Driver


- Increases job speed by combining taps and drivers in one tool
- Six common tap sizes (6-32, 8-32, 10-32, 10-24, 12-24, 1/4-20)



32517



Cat. No.	Shank Length	Slotted Bits	Phillips Bits	Nut Driver Sizes	Overall Length	Weight
32517	4" (101.6 mm)	1/4" (6.4 mm) and 3/16" (4.8 mm)	#1 and #2	1/4", 5/16" and 3/8"	7-3/4" (196.9 mm)	8.0 oz. (227 g)



Multi-Bit Cushion-Grip Screwdrivers/Nut Drivers

10-in-1 Folding Screwdriver/Nut Driver

10-FOLD™



32535

- Conveniently folds up for easy storage or to fit into your pocket
- Each driver arm contains four interchangeable bit styles and two nut drivers
- Unfold each driver arm up to a full 180° for straight on driving power, or at 90° for extra leverage on stubborn fasteners
- The quick release button easily unlocks a fully extended driver arm

32536
TORX®



32537
Tamperproof TORX®



32538
Standard Hex



32539
Metric Hex



32434
Schrader®



32535
Standard



Cat. No.	Handle Color	Slotted Bits	Phillips Bits	Square Bits	TORX® Bits	Nut Driver Sizes	Hex Bits	Other Bits	Weight
32535	Black	1/4" (6.4 mm) and 3/16" (4.8 mm)	#1 and #2	#1 and #2	T10 and T15	5/16" and 1/4"	—	—	5.9 oz. (167 g)
32536	Green	—	—	—	T6, T7, T8, T10, T15, T20, T25, T27	5/16" and 1/4"	—	—	5.9 oz. (167 g)
32537	Green	—	—	—	T7, T8, T9, T10, T15, T20, T25, T27	5/16" and 1/4"	—	—	5.9 oz. (167 g)
32538	Red	—	—	—	—	5/16" and 1/4"	1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16"	—	5.9 oz. (167 g)
32539	Blue	—	—	—	—	5/16" and 1/4"	0.9 mm, 1.3 mm, 1.5 mm, 2 mm, 2.5 mm, 3 mm, 4 mm, 5 mm	—	5.9 oz. (167 g)
32534	Blue	1/4" (6.4 mm) and 3/16" (4.8 mm)	#1 and #2	#1 and #2	—	5/16" and 1/4"	—	Valve Core Removal/Installation - Extractor	5.9 oz. (167 g)

Schrader® is a registered trademark of Schrader-Bridgeport International, Inc.
TORX® is a registered trademark of Acument Intellectual Properties, LLC.

Magnetic Screwdriver Bit Sets

Non-Ratcheting Magnetic Screwdriver with 32-Piece Tamperproof Bit Set

- Sturdy bit and screw holding magnet allows for screws to fit securely in place for easy use
- Durable PVC black block allows for easy storage of standard 1/4" bits
- Includes complete tamperproof bit set in block



32510

Cat. No.	Included	Weight
32510	Bits Included: TORX® - T7, T8, T10, T15, T20, T25, T27, T30 and T40 Fraction Hex - 3/32", 7/64", 1/8", 9/64", 5/32", and 3/16" Metric Hex - 2 mm, 2.5 mm, 3 mm, 4 mm, and 5 mm Spanner - 4, 6, 8, and 10 Tri-Wing® - 1, 2, 3 and 4 TORQ-SET® - 6, 8 and 10, 1/4" (6 mm) Square to 1/4" (6 mm) Hex Adapter to Drive Sockets	11.4 oz. (323 g)

32-Piece Bit Sets

- Durable PVC black block allows for easy storage of standard 1/4" bits
- Block slides over most screwdriver shafts for easy bit access and storage
- Industrial strength, heat-treated steel bits for long lasting use
- 1/4" square to 1/4" hex adapter to drive sockets



32526



32525

Cat. No.	Description	Included	Weight
32526	32 Piece Standard Tip Bit Set	Hex: 5/64", 3/32", 7/64", 1/8", 9/64", 5/32" and 3/16" Phillips: #0, #1, #2 and #3 Square Recess: #1, #2 and #3 TORX® - T6, T7, T8, T10, T15, T20 and T25 Slotted: 3-4, 5-6, 6-8, 8-10, 10-12 and 12-14 Screw Sizes Clutch: 5/32" and 3/16"	6.8 oz. (193 g)
32525	32 Piece Tamperproof Bit Set	TORX®: T7, T8, T10, T15, T20, T25, T27, T30 and T40 Fraction Hex: 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", and 3/16" Metric Hex: 2 mm, 2.5 mm, 3 mm, 4 mm and 5 mm Spanner: 4, 6, 8, and 10 Tri-Wing®: 1, 2, 3 and 4 TORQ-SET®: 6, 8 and 10	6.8 oz. (193 g)



Replacement Parts

Replacement Parts for Multi-Bit Screwdriver/Nut Drivers


- Precision-machined tips for exact fit into fastener



Cat. No.	Description	For Use With	Package Quantity
32392	Heavy Duty Main Barrel Replacement	Heavy Duty (32557) and Ratcheting (32558)	1 Unit
32394	Secondary Blade Barrel Replacement	Heavy Duty (32557) and Ratcheting (32558)	2 Units
32395	Extended Blade Barrel Replacement	Extended Reach Drivers (32559 and 32560)	1 Unit
32396	Stubby Blade Barrel Replacement	Stubby Drivers (32561 and 32562)	1 Unit
32397	Replacement Bit #2 Phillips & #1 Square	Heavy Duty (32557) and Ratcheting (32558)	2 Bits
32398	Bit #1 Phillips 1/4" Slotted	Heavy Duty (32557), Ratcheting (32558) and Stubby (32561)	2 Bits
32399	Replacement Bit #2 Square 3/16" Slotted	Heavy Duty (32557) and Ratcheting (32558)	2 Bits
32400	Replacement Bit #2 Phillips, #1 Phillips	Extended Reach (32559)	2 Bits
32401	Bit 3/16" Slotted 1/4" Slotted	Extended Reach (32559)	2 Bits
32410	Replacement Bit #2 Square & #2 Phillips	Stubby Driver (32560)	2 Bits
32411	Replacement Bit #1 Square, 1/4" Slotted	Stubby Driver (32560)	2 Bits
32412	Bit for Stubby #2 PH 3/16" Slotted	Stubby Driver (32561)	2 Bits
32478	Bit for 32476 and 32460, #1 PH 3/16" SL	5-in-1 (32476)	1 Bit
32479	Bit #2 Phillips, 9/32" Slotted	5-in-1 (32476)	1 Bit
32482	Bit #1 Phillips, 3/16" Slotted	10-in-1, 11-in-1 and 10-Fold™	2 Bits
32483	Bit #2 Phillips 1/4" Slotted	10-in-1, 11-in-1 and 10-Fold™	2 Bits
32484	Replacement Bit #1 Square & #2 Square	10-in-1, 11-in-1 and 10-Fold™	2 Bits
67101	Bit #2 Phillips, 3/16" Slotted	2-in-1 Rapi-Drive®, 10-in-1, 11-in-1 and 10-Fold™	2 Bits
32540	Bit TT7, TT8 Tamperproof TORX®	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32541	Bit TT9, TT10 Tamperproof TORX®	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32542	Bit TT15 and TT20 Tamperproof TORX®	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32543	Bit TT25 and TT27 Tamperproof TORX®	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32544	Replacement Bit #6 TORX® & #7 TORX®	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32485	Replacement Bit #10 TORX® & #15 TORX®	10-in-1, 11-in-1 and 10-Fold™	2 Bits
32545	Replacement Bit #8 TORX® & #10 TORX®	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32546	Replacement Bit #T25 TORX® & #T27 TORX®	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32547	Replacement Bit 3/32" Hex & 7/64" Hex	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32548	Replacement Bit 5/32" Hex & 3/16" Hex	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32549	Replacement Bit 1/16" Hex & 5/64" Hex	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32550	Replacement Bit 1/8" Hex & 9/64" Hex	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32551	Replacement Bit .9 mm Hex & 1.3 mm Hex	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32552	Replacement Bit 1.5 mm Hex & 2 mm Hex	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32553	Replacement Bit 2.5 mm Hex & 3 mm Hex	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32554	Replacement Bit 4 mm Hex & 5 mm Hex	10-in-1, 11-in-1 and 10-Fold™ Multi-bit Drivers	2 Bits
32752	Double Sided Combo Replacement Bit	Combo-Tip Multi-Tool (32505)	2 Bits
32528	Replacement Bit for 11-in-1	11-in-1 Schrader (32527)	1 Bit
32770	Replacement Bit, Phillips #1, #2	15-in-1 Screwdrivers (32290, 32291, 32292)	1 bit
32771	Replacement Bit, Phillips #0, #3	15-in-1 Screwdrivers (32290, 32291, 32292)	1 bit
32772	Replacement Bit, Square #1, #2	15-in-1 Screwdrivers (32290, 32291, 32292)	1 bit
32773	Replacement Bit, Torx 10, 15	15-in-1 Screwdrivers (32290, 32291, 32292)	1 bit
32774	Replacement Bit, Torx 20, 25	15-in-1 Screwdrivers (32290, 32291, 32292)	1 bit
32775	Replacement Bit, Slotted 4mm, 6mm	15-in-1 Screwdrivers (32290, 32291, 32292)	1 bit
32776	Replacement Bit, Combo Tip #1, #2	15-in-1 Screwdrivers (32290, 32291, 32292)	1 bit
32777	Replacement Bit, Spanner 6, 8	15-in-1 Screwdrivers (32290, 32291, 32292)	1 bit
32778	Replacement Bit, Spanner 10, 12	15-in-1 Screwdrivers (32290, 32291, 32292)	1 bit
32779	Replacement Bit, Hex Pin 1/8, 9/64	15-in-1 Screwdrivers (32290, 32291, 32292)	1 bit
32780	Replacement Bit, Hex Pin 5/32, 3/16	15-in-1 Screwdrivers (32290, 32291, 32292)	1 bit
32781	Replacement Bit, Tamperproof 10, 15	15-in-1 Tamperproof Screwdriver (32291)	1 bit
32782	Replacement Bit, Tamperproof 20, 25	15-in-1 Tamperproof Screwdriver (32291)	1 bit
32783	Replacement Bit, Tamperproof 27, 30	15-in-1 Tamperproof Screwdriver (32291)	1 bit
32784	Replacement Bit, Schrader Valve & Core Remover	15-in-1 HVAC Screwdriver (32292)	1 bit
13391	Replacement Bits, 4-in-1 Elect., PH 0, SLTD 3/32"	4-in-1 Electronics Screwdriver (Cat. No. 32581)	2 Bits
13392	Replacement Bits, 4-in-1 Elect., PH 00, SLTD 1/8"	4-in-1 Electronics Screwdriver (Cat. No. 32581)	2 Bits



Screwdrivers, Nut Drivers and Accessories



Plastic-Handle Screwdrivers

Meets or exceeds applicable ASME / ANSI and MIL specifications

Nickel-chrome, precision-forged and polished blades with black tips

Tough amber plastic handle

Smooth Comfordome® handles fit the palm of the hand comfortably.



Chrome-plated shank helps prevent corrosion

Internal flanges provide solid, twist-resistant shaft anchor.



7-Piece Combination Screwdriver Set



Additional Features:

- Set contains two Phillips-tip screwdrivers, two slotted keystone-tip screwdrivers and three popular cabinet-tip screwdrivers



Cat. No.	Set Contains	Weight			
85276		1.1 lbs. (0.50 kg)			
Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length
BD284	Keystone	1/4" (6.4 mm)	Square	4" (101.6 mm)	8-1/2" (215.9 mm)
BD306	Keystone	5/16" (7.9 mm)	Square	6" (152.4 mm)	11-3/16" (284.2 mm)
A216-3	Cabinet	1/8" (3.2 mm)	Round	3" (76.2 mm)	6" (152.4 mm)
A216-4	Cabinet	1/8" (3.2 mm)	Round	4" (101.6 mm)	7" (177.8 mm)
A216-6	Cabinet	1/8" (3.2 mm)	Round	6" (152.4 mm)	9" (228.6 mm)
BD111	Phillips	#1	Round	3" (76.2 mm)	6-5/8" (168.3 mm)
BD122	Phillips	#2	Round	4" (101.6 mm)	8-1/2" (215.9 mm)

85276

Bull Driver™ Plastic-Handle Screwdrivers



Additional Features:

- Oversized handle is 35% larger than comparable screwdriver handles
- Delivers up to 50% extra power to perform tough jobs with minimum effort



BD306

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length	Weight
BD284	Keystone	1/4" (6.4 mm)	Square	4" (101.6 mm)	8-1/2" (215.9 mm)	4.0 oz. (113 g)
BD286	Keystone	1/4" (6.35 mm)	Square	6" (152.4 mm)	10-1/2" (266.7 mm)	4.8 oz. (136 g)
BD306	Keystone	5/16" (7.9 mm)	Square	6" (152.4 mm)	11-3/16" (284.2 mm)	5.6 oz. (159 g)
BD308	Keystone	5/16" (7.9 mm)	Square	8" (203.2 mm)	13-3/16" (335.0 mm)	6.4 oz. (181 g)
BD410	Keystone	3/8" (9.52 mm)	Square	10" (254.0 mm)	15-3/16" (385.8 mm)	9.6 oz. (272 g)
BD412	Keystone	3/8" (9.52 mm)	Square	12" (304.8 mm)	17-3/16" (436.6 mm)	12.0 oz. (340 g)
BD144	Keystone	1/4" (6.4 mm)	Round	4" (101.6 mm)	8-1/2" (215.9 mm)	4.0 oz. (113 g)
BD146	Keystone	1/4" (6.4 mm)	Round	6" (152.4 mm)	10-1/2" (266.7 mm)	4.0 oz. (113 g)
BD156	Keystone	5/16" (7.9 mm)	Round	6" (152.4 mm)	11-3/16" (284.2 mm)	5.6 oz. (159 g)
BD408	Keystone	3/8" (9.52 mm)	Round	8" (203.2 mm)	13-3/16" (335.0 mm)	8.0 oz. (227 g)
BD510	Keystone	3/8" (9.52 mm)	Round	10" (254 mm)	15-3/16" (385.76 mm)	8.8 oz. (249 g)
BD512	Keystone	3/8" (9.5 mm)	Round	12" (305 mm)	17-3/16" (437 mm)	9.6 oz. (272 g)
BD111	Phillips	#1	Round	3" (76.2 mm)	6-5/8" (168.3 mm)	1.6 oz. (45 g)
BD122	Phillips	#2	Round	4" (101.6 mm)	8-1/2" (215.9 mm)	3.2 oz. (91 g)
BD133	Phillips	#3	Round	6" (152.4 mm)	11-3/16" (284.2 mm)	5.6 oz. (159 g)

See page 310 for additional information on warnings.



Plastic-Handle Screwdrivers

Plastic-Handle Screwdrivers



P28

Additional Features:

- Precision-machined Phillips tips provide a more consistent geometric symmetry to ensure accurate fit and torque without slippage
- Small-diameter cabinet-tip shanks for use in recessed holes or tight places and is well-suited for electrical and telecommunications work

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length	Weight
P18	Phillips	#1	Round	8" (203.2 mm)	11-1/2" (292.1 mm)	2.4 oz. (68 g)
P28	Phillips	#2	Round	8" (203.2 mm)	11-5/8" (295.3 mm)	3.2 oz. (91 g)
P212	Phillips	#2	Round	12" (304.8 mm)	15-5/8" (396.9 mm)	4.0 oz. (113 g)
P202	Phillips	#2	Round	20" (508.0 mm)	24-1/2" (622.3 mm)	8.8 oz. (249 g)
A000	Keystone	3/32" (2.4 mm)	Round	1-1/2" (38.1 mm)	2-7/8" (73.0 mm)	0.3 oz. (8.5 g)
A216-2	Cabinet	1/8" (3.17 mm)	Round	2" (50.8 mm)	5" (127 mm)	0.8 oz. (23 g)
A216-3	Cabinet	1/8" (3.2 mm)	Round	3" (76.2 mm)	6" (152.4 mm)	0.8 oz. (23 g)
A216-4	Cabinet	1/8" (3.2 mm)	Round	4" (101.6 mm)	7" (177.8 mm)	0.8 oz. (23 g)
A216-6	Cabinet	1/8" (3.2 mm)	Round	6" (152.4 mm)	9" (228.6 mm)	0.8 oz. (23 g)
A216-8	Cabinet	1/8" (3.2 mm)	Round	8" (203.2 mm)	11" (279.4 mm)	0.8 oz. (23 g)
A216-10	Cabinet	1/8" (3.2 mm)	Round	10" (254.0 mm)	13" (330.2 mm)	0.8 oz. (23 g)
A316-3	Cabinet	3/16" (4.76 mm)	Round	3" (76.2 mm)	6-5/8" (168.27 mm)	1.6 oz. (45 g)
A316-4	Cabinet	3/16" (4.8 mm)	Round	4" (101.6 mm)	7-5/8" (193.7 mm)	1.6 oz. (45 g)
A316-6	Cabinet	3/16" (4.8 mm)	Round	6" (152.4 mm)	9-5/8" (244.5 mm)	1.6 oz. (45 g)
A316-8	Cabinet	3/16" (4.76 mm)	Round	8" (203.2 mm)	11-5/8" (295.27 mm)	2.4 oz. (68 g)
A316-10	Cabinet	3/16" (4.8 mm)	Round	10" (254.0 mm)	13-5/8" (346.1 mm)	3.2 oz. (91 g)
70155	Cabinet	1/4" (6.4 mm)	Round	20" (508.0 mm)	24-1/2" (622.3 mm)	7.2 oz. (204 g)

Pocket-Clip Screwdrivers



A116-3

Additional Features:

- Specially designed for delicate instrument work

Cat. No.	Tip Type	Tip Size	Shank Length	Shank Type	Overall Length	Weight
A130-2	Keystone	1/8" (3.2 mm)	2" (50.8 mm)	Round	3-7/8" (98.4 mm)	0.8 oz (23 g)
A130-3	Keystone	1/8" (3.2 mm)	3" (76.2 mm)	Round	4-7/8" (123.8 mm)	0.6 oz. (17 g)
A116-2	Keystone	3/32" (2.4 mm)	2" (50.8 mm)	Round	4-7/16" (112.7 mm)	0.8 oz (23 g)
A116-3	Keystone	3/32" (2.4 mm)	3" (76.2 mm)	Round	5-7/16" (138.1 mm)	0.5 oz. (14 g)
A131-2	Keystone	1/8" (3.2 mm)	2" (50.8 mm)	Round	4-7/16" (112.7 mm)	0.8 oz (23 g)
P12	Phillips	#0	2-1/2" (63.5 mm)	Round	5" (127.0 mm)	0.8 oz (23 g)

Magnetic Plastic-Handle Screwdriver


- Powerful magnet built into its shank to hold interchangeable bits and also screws
- Comfortable handle for easier driving
- Interchangeable bits store inside handle for quick access
- Wide selection of bits for different screw types



70035

Cat. No.	Shank Length	Tip Size	Overall Length	Weight
70035	3-3/4" (95.3 mm)	Slotted 3/16" (4.8 mm), 9/32" (7.1 mm); Phillips #1, #2	7-1/4" (184.2 mm)	4 oz. (113 g)





Screw-Holding Screwdrivers

3-Piece Slotted Plastic-Handle Screw-Holding Screwdriver Set

- Not designed for torquing or tightening



SK234

Cat. No.	Set Contains	Weight		
SK234		6.6 oz. (187 g)		
Cat. No.	Tip Type	Tip Size	Shank Length	Overall Length
K23	Slotted	3/16" (4.8 mm)	3" (76.2 mm)	5-1/4" (133.4 mm)
K34	Slotted	1/4" (6.4 mm)	4" (101.6 mm)	7-3/4" (196.9 mm)
K46	Slotted	5/16" (7.9 mm)	6" (152.4 mm)	10-1/4" (260.4 mm)

Slotted Plastic-Handle Screw-Holding Screwdrivers

- Positive gripping action holds, starts, and drives slotted screws in awkward, hard-to-reach places
- Split-blade screw-holding driver wedges into screw slot
- Not designed for torquing or tightening



K36

Cat. No.	Tip Type	Tip Size	Shank Type	Shank Length	Overall Length	Weight
K23	Slotted	3/16" (4.8 mm)	Round	3" (76.2 mm)	5-1/4" (133.4 mm)	0.8 oz. (23 g)
K28	Slotted	3/16" (4.8 mm)	Round	8" (203.2 mm)	10-1/4" (260.4 mm)	1.6 oz. (45 g)
K34	Slotted	1/4" (6.4 mm)	Round	4" (101.6 mm)	7-3/4" (196.9 mm)	1.6 oz. (45 g)
K36	Slotted	1/4" (6.4 mm)	Round	6" (152.4 mm)	9-3/4" (247.7 mm)	2.4 oz. (68 g)
K38	Slotted	1/4" (6.4 mm)	Round	8" (203.2 mm)	11-3/4" (298.5 mm)	3.2 oz. (91 g)
K44	Slotted	5/16" (7.9 mm)	Round	4" (101.6 mm)	8-1/4" (209.6 mm)	4.0 oz. (113 g)
K46	Slotted	5/16" (7.9 mm)	Round	6" (152.4 mm)	10-1/4" (260.4 mm)	4.0 oz. (113 g)
K48	Slotted	5/16" (7.9 mm)	Round	8" (203.2 mm)	12-1/4" (311.2 mm)	4.8 oz. (136 g)

Phillips-Tip Screw-Holding Screwdrivers

- Positive gripping action holds and starts Phillips screws in awkward, hard-to-reach places
- Blade separates to hold the fastener
- Not designed for torquing or tightening



K16

Cat. No.	Overall Length	Weight
K14	5" (127.0 mm) with Pocket Clip	0.8 oz. (23 g)
K16	7" (177.8 mm)	0.8 oz. (23 g)
K19	9" (228.6 mm)	0.8 oz. (23 g)



Impact and Torque Drivers

Reversible Impact-Driver Set

- Rugged, hand-impact driver turns rusted, frozen, or other stubborn screws
- Can also be used with 3/8" square-drive impact sockets
- Internal, spring-loaded, helical design transforms the impact of a hammer blow to up to 200 ft.-lbs. of shock torque
- Easily reverses for tightening or loosening screws
- Constructed of high-grade alloy steel that has been heat-treated for added strength
- Reclosable, seal-tight vinyl pouch with hang-up grommet



70220

Cat. No.	Includes	Nut Driver Sizes	Phillips Bits	Slotted Bits	Weight
70220	3/8" (9.5 mm) Square Drive fitting Adapter	5/16"	#2 and #4	5/16" (7.9 mm) and 1/2" (12.7 mm)	2.2 lbs. (1.00 kg)

Replacement Part

Cat. No.	Description	Slotted Bits	Phillips Bits	Weight
70229	Screwdriver Bits for Impact Driver Set	5/16" (7.9 mm) and 1/2" (12.7 mm)	#2 and #4	4.0 oz. (113 g)

Torque Screwdriver Set

- Compact, easy to use set includes the Torque Screwdriver, a 6-piece bit set and a rugged case with foam inserts for a tight, organized fit
- Increased usability and readability plus a wider torque range (5-40 in. lbs)
- Tri-lobular design with a textured finish for better grip
- Lightweight, aluminum frame
- N.I.S.T. traceable calibration certificate
- Set includes six 3-1/2" (89 mm) power drivers



57032

Cat. No.	Included	Weight
57032	Phillips: #1 and #2 Slotted: 3/16" (4.76 mm) and 1/4" (6.35 mm) Square: #1 and #2	1.0 lbs. (0.45 kg)



Heavy-Duty Cushion-Grip Nut Drivers

Through-handle full-hollow shaft

design for torquing hex nuts onto threaded rod of any length




Wrench-assist
feature for
added torque



**Rare-earth
magnetic tip**
holds nut in
place while
fastening



**Color-coded
ends and tips**
for easy size
identification

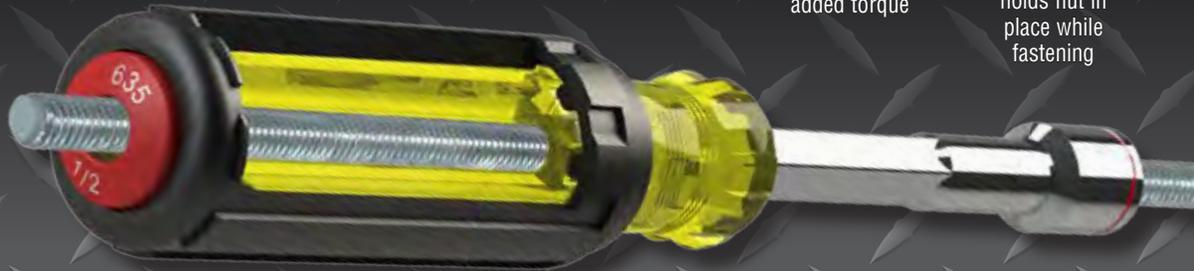

6 sizes 1/4", 5/16", 3/8",
7/16", 1/2" and 9/16" sizes

PROUDLY BUILT IN
USA
WITH GLOBAL COMPONENTS

6-Piece Heavy-Duty Nut Driver Set

Cat. No.	Set Contains	Weight	
635-6		2.5 lbs. (1.13 kg)	
Cat. No.	Color Code	Hex Size	Overall Length
635-1/4	Red	1/4"	9" (228.6 mm)
635-5/16	Yellow	5/16"	9" (228.6 mm)
635-3/8	Blue	3/8"	9" (228.6 mm)
635-7/16	Brown	7/16"	9-25/64" (238.5 mm)
635-1/2	Red	1/2"	9-25/64" (238.5 mm)
635-9/16	Orange	9/16"	9-25/64" (238.5 mm)



4-Piece Heavy-Duty Nut Driver Set

Cat. No.	Set Contains	Weight	
635-4		1.4 lbs. (0.64 kg)	
Cat. No.	Color Code	Hex Size	Overall Length
635-1/4	Red	1/4"	9" (228.6 mm)
635-5/16	Yellow	5/16"	9" (228.6 mm)
635-3/8	Blue	3/8"	9" (228.6 mm)
635-7/16	Brown	7/16"	9-25/64" (238.5 mm)



Heavy-Duty Nut Drivers

Cat. No.	Color Code	Hex Size	Overall Length	Weight
635-1/4	Red	1/4"	9" (228.6 mm)	4.8 oz. (136 g)
635-5/16	Yellow	5/16"	9" (228.6 mm)	4.8 oz. (136 g)
635-3/8	Blue	3/8"	9" (228.6 mm)	4.8 oz. (136 g)
635-7/16	Brown	7/16"	9-25/64" (238.5 mm)	6.4 oz. (181 g)
635-1/2	Red	1/2"	9-25/64" (238.5 mm)	8.0 oz. (227 g)
635-9/16	Orange	9/16"	9-25/64" (238.5 mm)	8.0 oz. (227 g)



See page 310 for additional information on warnings.



Cushion-Grip Nut Drivers

Meets or exceeds applicable ASME / ANSI and MIL specifications



Handle end is also color coded for easy identification

Tip-Ident® quickly identifies nut driver and size

Internal flanges provide solid, twist-resistant shaft anchor



Cushion-Grip handle for greater torque and comfort

Premium chrome-plated shaft for smooth feel and corrosion resistance



7-Piece Magnetic-Tip Hollow-Shaft Nut Driver Sets

Additional Features:

- Exclusive hollow shaft* design with Rare Earth magnetic tip features unobstructed pass-through, even on long bolts

Cat. No.	Set Contains	Weight		
631M	Magnetic Nut Driver Set 3" Shaft, 7 Pc	1.5 lbs. (0.68 kg)		
Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length
630-3/16M*	Black	3/16"	3" (76.2 mm)	6-3/4" (171.5 mm)
630-1/4M	Red	1/4"	3" (76.2 mm)	6-3/4" (171.5 mm)
630-5/16M	Yellow	5/16"	3" (76.2 mm)	6-3/4" (171.5 mm)
630-11/32M	Green	11/32"	3" (76.2 mm)	6-3/4" (171.5 mm)
630-3/8M	Blue	3/8"	3" (76.2 mm)	6-3/4" (171.5 mm)
630-7/16M	Brown	7/16"	3" (76.2 mm)	7-5/16 (185.7 mm)
630-1/2M	Red	1/2"	3" (76.2 mm)	7-5/16 (185.7 mm)
647M	Magnetic Nut Driver Set 6" Shafts, 7 Pc	1.5 lbs. (0.68 kg)		
Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length
646-3/16M*	Black	3/16"	6" (152.4 mm)	9-3/4" (247.7 mm)
646-1/4M	Red	1/4"	6" (152.4 mm)	9-3/4" (247.7 mm)
646-5/16M	Yellow	5/16"	6" (152.4 mm)	9-3/4" (247.7 mm)
646-11/32M	Green	11/32"	6" (152.4 mm)	9-3/4" (247.7 mm)
646-3/8M	Blue	3/8"	6" (152.4 mm)	9-3/4" (247.7 mm)
646-7/16M	Brown	7/16"	6" (152.4 mm)	10-5/16" (261.9 mm)
646-1/2M	Red	1/2"	6" (152.4 mm)	10-5/16" (261.9 mm)

*3/16" magnetic nut driver does not have hollow shaft



631M

2-Piece Magnetic-Tip Hollow-Shaft Nut Driver Sets

Additional Features:


- Exclusive hollow shaft* design with Rare Earth magnetic tip features unobstructed pass-through, even on long bolts

Cat. No.	Set Contains	Weight		
630M	Magnetic Nut Driver Set 3" Shank 2 Pc	6.4 oz. (181 g)		
Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length
630-1/4M	Red	1/4"	3" (76.2 mm)	6-3/4" (171.5 mm)
630-5/16M	Yellow	5/16"	3" (76.2 mm)	6-3/4" (171.5 mm)
646M	Nut Driver Set 6" Shafts, Magnetic 2 Pc	8.0 oz. (227 g)		
Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length
646-1/4M	Red	1/4"	6" (152.4 mm)	9-3/4" (247.7 mm)
646-5/16M	Yellow	5/16"	6" (152.4 mm)	9-3/4" (247.7 mm)



630M





Cushion-Grip Nut Driver Sets

7-Piece Nut Driver Sets



Cat. No.	Set Contains	Weight		
631	Nut Driver Set 3" Shafts, 7 Pc	1.5 lbs. (0.68 kg)		
Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length
630-3/16	Black	3/16"	3" (76.2 mm)	6-3/4" (171.5 mm)
630-1/4	Red	1/4"	3" (76.2 mm)	6-3/4" (171.5 mm)
630-5/16	Yellow	5/16"	3" (76.2 mm)	6-3/4" (171.5 mm)
630-11/32	Green	11/32"	3" (76.2 mm)	6-3/4" (171.5 mm)
630-3/8	Blue	3/8"	3" (76.2 mm)	6-3/4" (171.5 mm)
630-7/16	Brown	7/16"	3" (76.2 mm)	7-5/16" (185.7 mm)
630-1/2	Red	1/2"	3" (76.2 mm)	7-5/16" (185.7 mm)
647	Nut Driver Set 6" Shafts, 7 Pc	1.7 lbs. (0.77 kg)		
Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length
646-3/16	Black	3/16"	6" (152.4 mm)	9-3/4" (247.7 mm)
646-1/4	Red	1/4"	6" (152.4 mm)	9-3/4" (247.7 mm)
646-5/16	Yellow	5/16"	6" (152.4 mm)	9-3/4" (247.7 mm)
646-11/32	Green	11/32"	6" (152.4 mm)	9-3/4" (247.7 mm)
646-3/8	Blue	3/8"	6" (152.4 mm)	9-3/4" (247.7 mm)
646-7/16	Brown	7/16"	6" (152.4 mm)	10-5/16" (261.9 mm)
646-1/2	Red	1/2"	6" (152.4 mm)	10-5/16" (261.9 mm)



631

7-Piece Metric Nut Driver Set



Additional Features:

- Standard length for most applications

Cat. No.	Set Contains	Weight		
65160		1.5 lbs. (0.68 kg)		
Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length
630-5MM	Black	5 mm	3" (76.2 mm)	6-3/4" (171.5 mm)
630-55MM	Brown	5.5 mm	3" (76.2 mm)	6-3/4" (171.5 mm)
630-6MM	Red	6 mm	3" (76.2 mm)	6-3/4" (171.5 mm)
630-7MM	Orange	7 mm	3" (76.2 mm)	6-3/4" (171.5 mm)
630-8MM	Yellow	8 mm	3" (76.2 mm)	6-3/4" (171.5 mm)
630-9MM	Green	9 mm	3" (76.2 mm)	6-3/4" (171.5 mm)
630-10MM	Blue	10 mm	3" (76.2 mm)	6-3/4" (171.5 mm)



65160

4-Piece Nut Driver Set



Additional Features:

- Standard length for most applications

Cat. No.	Set Contains	Weight		
633		1.3 lbs. (0.59 kg)		
Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length
630-1/4	Red	1/4"	3" (76.2 mm)	6-3/4" (171.5 mm)
630-5/16	Yellow	5/16"	3" (76.2 mm)	6-3/4" (171.5 mm)
630-3/8	Blue	3/8"	3" (76.2 mm)	6-3/4" (171.5 mm)
630-9/16	Orange	9/16"	4" (101.6 mm)	9-3/8" (238.1 mm)



633

See page 310 for additional information on warnings.



Cushion-Grip Nut Driver Sets

2-Piece Stubby Nut Driver Set

Additional Features:

- For work in close quarters

Cat. No.	Set Contains	Weight															
610	Stubby Nut Driver Set 1-1/2" Shafts, 2 Pc	3.2 oz. (91 g)															
	<table border="1"> <thead> <tr> <th>Cat. No.</th> <th>Color Code</th> <th>Hex Size</th> <th>Shaft Length</th> <th>Overall Length</th> </tr> </thead> <tbody> <tr> <td>610-1/4</td> <td>Red</td> <td>1/4"</td> <td>1-1/2" (38.1 mm)</td> <td>3-1/2" (88.9 mm)</td> </tr> <tr> <td>610-5/16</td> <td>Yellow</td> <td>5/16"</td> <td>1-1/2" (38.1 mm)</td> <td>3-1/2" (88.9 mm)</td> </tr> </tbody> </table>	Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length	610-1/4	Red	1/4"	1-1/2" (38.1 mm)	3-1/2" (88.9 mm)	610-5/16	Yellow	5/16"	1-1/2" (38.1 mm)	3-1/2" (88.9 mm)	
Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length													
610-1/4	Red	1/4"	1-1/2" (38.1 mm)	3-1/2" (88.9 mm)													
610-5/16	Yellow	5/16"	1-1/2" (38.1 mm)	3-1/2" (88.9 mm)													
610M	Nut Driver Set 1-1/2" Hollow Shaft, 2 Pc	3.2 oz. (91 g)															
	<table border="1"> <thead> <tr> <th>Cat. No.</th> <th>Color Code</th> <th>Hex Size</th> <th>Shank Length</th> <th>Overall Length</th> </tr> </thead> <tbody> <tr> <td>610-1/4M</td> <td>Red</td> <td>1/4"</td> <td>1-1/2" (38 mm)</td> <td>3-1/2" (88.9 mm)</td> </tr> <tr> <td>610-5/16M</td> <td>Yellow</td> <td>5/16"</td> <td>1-1/2" (38 mm)</td> <td>3-1/2" (88.9 mm)</td> </tr> </tbody> </table>	Cat. No.	Color Code	Hex Size	Shank Length	Overall Length	610-1/4M	Red	1/4"	1-1/2" (38 mm)	3-1/2" (88.9 mm)	610-5/16M	Yellow	5/16"	1-1/2" (38 mm)	3-1/2" (88.9 mm)	
Cat. No.	Color Code	Hex Size	Shank Length	Overall Length													
610-1/4M	Red	1/4"	1-1/2" (38 mm)	3-1/2" (88.9 mm)													
610-5/16M	Yellow	5/16"	1-1/2" (38 mm)	3-1/2" (88.9 mm)													



610



Cushion-Grip Nut Drivers

Magnetic-Tip Hollow-Shaft Nut Drivers

Additional Features:

- Exclusive hollow shaft* design with Rare Earth magnetic tip features unobstructed pass-through, even on long bolts



630-3/8M

Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length	Weight
610-1/4M	Red	1/4"	1-1/2" (38.1 mm)	3-1/2" (88.9 mm)	1.6 oz. (45 g)
610-5/16M	Yellow	5/16"	1-1/2" (38.1 mm)	3-1/2" (88.9 mm)	1.6 oz. (45 g)
610-3/8M	Blue	3/8" (9.52 mm)	1-1/2" (38.1 mm)	3-1/2" (88.9 mm)	1.6 oz. (45 g)
630-3/16M*	Black	3/16"	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-1/4M	Red	1/4"	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-5/16M	Yellow	5/16"	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-11/32M	Green	11/32"	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-3/8M	Blue	3/8"	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-7/16M	Brown	7/16"	3" (76.2 mm)	7-5/16" (185.7 mm)	4.0 oz. (113 g)
630-1/2M	Red	1/2"	3" (76.2 mm)	7-5/16" (185.7 mm)	4.0 oz. (113 g)
646-3/16M*	Black	3/16"	6" (152.4 mm)	9-3/4" (247.7 mm)	4.0 oz. (113 g)
646-1/4M	Red	1/4"	6" (152.4 mm)	9-3/4" (247.7 mm)	4.0 oz. (113 g)
646-5/16M	Yellow	5/16"	6" (152.4 mm)	9-3/4" (247.7 mm)	4.0 oz. (113 g)
646-11/32M	Green	11/32"	6" (152.4 mm)	9-3/4" (247.7 mm)	4.0 oz. (113 g)
646-3/8M	Blue	3/8"	6" (152.4 mm)	9-3/4" (247.7 mm)	4.8 oz. (136 g)
646-7/16M	Brown	7/16"	6" (152.4 mm)	10-5/16" (261.9 mm)	5.6 oz. (159 g)
646-1/2M	Red	1/2"	6" (152.4 mm)	10-5/16" (261.9 mm)	5.6 oz. (159 g)
618-1/4M	Red	1/4"	18" (457.2 mm)	21-3/4" (552.5 mm)	8.0 oz. (227 g)
618-5/16M	Yellow	5/16"	18" (457.2 mm)	21-3/4" (552.5 mm)	8.0 oz. (227 g)

*3/16" magnetic nut driver does not have hollow shaft

Hollow-Shaft Stubby Nut Drivers


- For work in close quarters



610-5/16

Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length	Weight
610-1/4	Red	1/4"	1-1/2" (38.1 mm)	3-1/2" (88.9 mm)	1.6 oz. (45 g)
610-5/16	Yellow	5/16"	1-1/2" (38.1 mm)	3-1/2" (88.9 mm)	1.6 oz. (45 g)





Cushion-Grip Nut Drivers

Hollow-Shaft Nut Drivers

Additional Features:

- 3" (76 mm) length for most long bolt and stud applications
- 6" (152 mm) length reaches into deep recesses and fits over extra-long bolts and studs
- Exclusive hollow shaft* design with Rare Earth magnetic tip features unobstructed pass-through, even on long bolts



630-11MM

Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length	Weight
630-3/16*	Black	3/16"	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-1/4	Red	1/4"	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-5/16	Yellow	5/16"	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-11/32	Green	11/32"	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-3/8	Blue	3/8"	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-7/16	Brown	7/16"	3" (76.2 mm)	7-5/16 (185.7 mm)	4.0 oz. (113 g)
630-1/2	Red	1/2"	3" (76.2 mm)	7-5/16 (185.7 mm)	4.0 oz. (113 g)
630-9/16	Orange	9/16"	4" (101.6 mm)	9-3/8" (238.1 mm)	5.6 oz. (159 g)
630-5/8	Yellow	5/8"	4" (101.6 mm)	9-3/8" (238.1 mm)	5.6 oz. (159 g)
646-3/16*	Black	3/16"	6" (152.4 mm)	9-3/4" (247.7 mm)	4.0 oz. (113 g)
646-1/4	Red	1/4"	6" (152.4 mm)	9-3/4" (247.7 mm)	4.0 oz. (113 g)
646-5/16	Yellow	5/16"	6" (152.4 mm)	9-3/4" (247.7 mm)	4.0 oz. (113 g)
646-11/32	Green	11/32"	6" (152.4 mm)	9-3/4" (247.7 mm)	4.0 oz. (113 g)
646-3/8	Blue	3/8"	6" (152.4 mm)	9-3/4" (247.7 mm)	4.8 oz. (136 g)
646-7/16	Brown	7/16"	6" (152.4 mm)	10-5/16" (261.9 mm)	5.6 oz. (159 g)
646-1/2	Red	1/2"	6" (152.4 mm)	10-5/16" (261.9 mm)	5.6 oz. (159 g)
646-9/16	Orange	9/16"	6" (152.4 mm)	11-3/8" (288.9 mm)	6.4 oz. (181 g)
646-5/8	Yellow	5/8"	6" (152.4 mm)	11-3/8" (288.9 mm)	6.4 oz. (181 g)
Metric					
630-4MM	Red	4 mm	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-4.5MM	Yellow	4.5 mm	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-5MM	Black	5 mm	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-6MM	Red	6 mm	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-7MM	Orange	7 mm	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-8MM	Yellow	8 mm	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-10MM	Blue	10 mm	3" (76.2 mm)	6-3/4" (171.5 mm)	3.2 oz. (91 g)
630-11MM	Brown	11 mm	3" (76.2 mm)	7-5/16 (185.7 mm)	3.2 oz. (91 g)

*3/16" magnetic nut driver does not have hollow shaft

Coated Hollow-Shaft Nut Drivers

Additional Features:

- Entire shaft plastic coated for circuit protection only. NOT INSULATED
- Special plastic coating resists cutting, cracking and chipping
- Thin coating permits use in confined areas



640-1/2

Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length	Weight
640-3/16	Black	3/16"	3" (76.2 mm)	6-3/4" (171.5 mm)	4.0 oz. (113 g)
640-1/4	Red	1/4"	3" (76.2 mm)	6-3/4" (171.5 mm)	4.0 oz. (113 g)
640-5/16	Yellow	5/16"	3" (76.2 mm)	6-3/4" (171.5 mm)	4.0 oz. (113 g)
640-3/8	Blue	3/8"	3" (76.2 mm)	6-3/4" (171.5 mm)	4.0 oz. (113 g)
640-7/16	Brown	7/16"	3" (76.2 mm)	7-5/16 (185.7 mm)	4.8 oz. (136 g)
640-1/2	Red	1/2"	3" (76.2 mm)	7-5/16 (185.7 mm)	4.0 oz. (113 g)
640-9/16	Orange	9/16"	4" (101.6 mm)	9-3/8" (238.1 mm)	6.4 oz. (181 g)
640-5/8	Yellow	5/8"	4" (101.6 mm)	9-3/8" (238.1 mm)	6.4 oz. (181 g)

⚠ WARNING: NOT insulated. Coating is intended for protection of circuits only.

See page 310 for additional information on warnings.



Cushion-Grip Multi-Nut Drivers

Heavy-Duty Multi-Nut Drivers



Additional Features:

- Multiple sizes in one convenient tool
- Heavy-duty handle and shaft exceed the torque performance of regular nut drivers
- Wrench-assist feature for added torque



32800




Cat. No.	Driver Type	Hex Size	Shaft Length	Overall Length	Weight
32800	6-in-1	3/16", 1/4", 5/16", 3/8", 7/16", 9/16"	4" (101.6 mm)	9-1/2" (241.3 mm)	1.2 lbs. (0.54 kg)
32801	5-in-1	3/16", 1/4", 5/16", 3/8", 9/16"	4" (101.6 mm)	9-7/64" (231.4 mm)	1.0 lbs. (0.45 kg)

Plastic-Handle Nut Drivers

Meets or exceeds applicable ASME / ANSI and MIL specifications.

Smooth Comfordome® handles fit the palm of the hand comfortably.

Chrome-plated shank helps prevent corrosion.

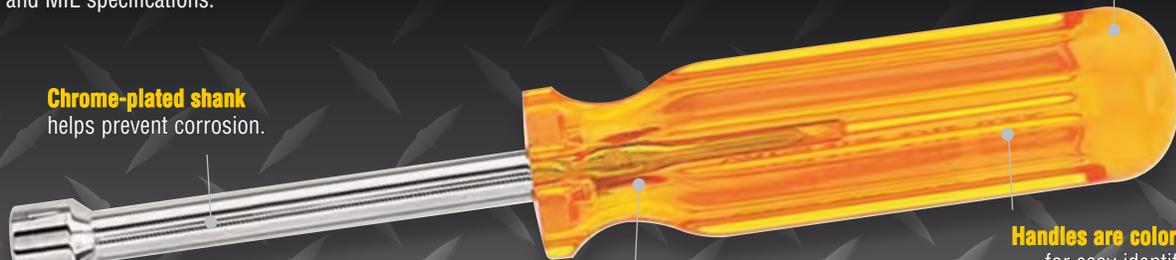

Handles are color-coded for easy identification.

Internal flanges provide solid, twist-resistant shaft anchor.



10-Piece Metric Hollow-Shaft Nut Driver Set With Stand

Additional Features:

- White enameled metal stand holds all ten 3" shaft metric nut drivers
- Identification label makes individual size selection easy




Cat. No.	Set Contains	Weight
70200		1.9 lbs. (0.86 kg)

Cat. No.	Handle Color	Hex Size	Shaft Length	Overall Length
70204	Black	4 mm	3" (76.2 mm)	6-5/8" (168.3 mm)
70245	Black	4.5 mm	3" (76.2 mm)	6-5/8" (168.3 mm)
70205	Black	5 mm	3" (76.2 mm)	6-5/8" (168.3 mm)
70255	Black	5.5 mm	3" (76.2 mm)	6-5/8" (168.3 mm)
70206	Black	6 mm	3" (76.2 mm)	6-5/8" (168.3 mm)
70207	Black	7 mm	3" (76.2 mm)	6-5/8" (168.3 mm)
70208	Black	8 mm	3" (76.2 mm)	6-5/8" (168.3 mm)
70209	Black	9 mm	3" (76.2 mm)	6-5/8" (168.3 mm)
70210	Black	10 mm	3" (76.2 mm)	7" (177.8 mm)
70211	Black	11 mm	3" (76.2 mm)	7" (177.8 mm)



70200





Plastic-Handle Nut Driver Sets

7-Piece Nut Driver Sets



Additional Features:

- Cat. No. K7 includes a convenient vinyl pouch which hangs up or rolls up
- Cat. No. 89904 contains seven 6" (152 mm) shaft nut drivers that reach into deep recesses



K7

Cat. No.	Set Contains					Weight
K7	Nut Driver Set 3" Shafts, 7 Pc					1.2 lbs. (0.54 kg)
	Cat. No.	Handle Color	Hex Size	Shaft Length	Overall Length	
	S6	Black	3/16"	3" (76.2 mm)	6-5/8" (168.3 mm)	
	S8	Red	1/4"	3" (76.2 mm)	6-5/8" (168.3 mm)	
	S10	Amber	5/16"	3" (76.2 mm)	6-5/8" (168.3 mm)	
	S11	Green	11/32"	3" (76.2 mm)	6-5/8" (168.3 mm)	
	S12	Blue	3/8"	3" (76.2 mm)	6-5/8" (168.3 mm)	
	S14	Brown	7/16"	3" (76.2 mm)	7" (177.8 mm)	
	S16	Red	1/2"	3" (76.2 mm)	7" (177.8 mm)	
89904	7 Piece Nut Driver Set 6" Shafts					1.2 lbs. (0.54 kg)
	Cat. No.	Handle Color	Hex Size	Shaft Length	Overall Length	
	S66	Black	3/16"	6" (152.4 mm)	9-5/8" (244.5 mm)	
	S86	Red	1/4"	6" (152.4 mm)	9-5/8" (244.5 mm)	
	S106	Amber	5/16"	6" (152.4 mm)	9-5/8" (244.5 mm)	
	S116	Green	11/32"	6" (152.4 mm)	9-5/8" (244.5 mm)	
	S126	Blue	3/8"	6" (152.4 mm)	9-5/8" (244.5 mm)	
	S146	Brown	7/16"	6" (152.4 mm)	10" (254.0 mm)	
	S166	Red	1/2"	6" (152.4 mm)	10" (254.0 mm)	

Plastic-Handle Nut Drivers

Magnetic Nut Drivers - Solid Shafts



S106M

Additional Features:

- Powerful nut-holding magnet built into solid shaft

Cat. No.	Handle Color	Hex Size	Shaft Length	Overall Length	Weight
S8M	Red	1/4"	3" (76.2 mm)	6-5/8" (168.3 mm)	2.4 oz. (68 g)
S10M	Amber	5/16"	3" (76.2 mm)	6-5/8" (168.3 mm)	2.4 oz. (68 g)
S86M	Yellow	1/4"	6" (152.4 mm)	9-5/8" (244.5 mm)	2.4 oz. (68 g)
S106M	Amber	5/16"	6" (152.4 mm)	9-5/8" (244.5 mm)	2.4 oz. (68 g)
S126M	Blue	3/8"	6" (152.4 mm)	9-5/8" (244.5 mm)	2.4 oz. (68 g)
S818M	Red	1/4"	18" (457.2 mm)	21-5/8" (549.3 mm)	4.0 oz. (113 g)
S1018M	Amber	5/16"	18" (457.2 mm)	21-5/8" (549.3 mm)	4.0 oz. (113 g)

6" Hollow Shaft Nut Drivers



S86

Additional Features:

- Reach into deep recesses
- Fits over extra-long bolts and studs

Cat. No.	Handle Color	Hex Size	Shaft Length	Overall Length	Weight
S66	Black	3/16"	6" (152.4 mm)	9-5/8" (244.5 mm)	2.4 oz. (68 g)
S86	Red	1/4"	6" (152.4 mm)	9-5/8" (244.5 mm)	2.4 oz. (68 g)
S106	Amber	5/16"	6" (152.4 mm)	9-5/8" (244.5 mm)	2.4 oz. (68 g)
S116	Green	11/32"	6" (152.4 mm)	9-5/8" (244.5 mm)	2.4 oz. (68 g)
S126	Blue	3/8"	6" (152.4 mm)	9-5/8" (244.5 mm)	2.4 oz. (68 g)
S146	Brown	7/16"	6" (152.4 mm)	10" (254.0 mm)	3.2 oz. (91 g)
S166	Red	1/2"	6" (152.4 mm)	10" (254.0 mm)	3.2 oz. (91 g)

See page 310 for additional information on warnings.



Plastic-Handle, Hollow-Shaft Nut Drivers

Hollow-Shaft Nut Drivers

Additional Features:

- Standard length works for most applications
- Fits over long bolts and studs
- Cat. Nos. SS8, SS10 and SS12 have smaller shaft length for work in close quarters



S10



SS10

Cat. No.	Handle Color	Hex Size	Shaft Length	Overall Length	Weight
SS8	Red	1/4"	1-1/2" (38.1 mm)	3-3/4" (95.3 mm)	2.4 oz. (68 g)
SS10	Amber	5/16"	1-1/2" (38.1 mm)	3-3/4" (95.3 mm)	2.4 oz. (68 g)
SS12	Blue	3/8"	1-1/2" (38.1 mm)	3-3/4" (95.3 mm)	2.4 oz. (68 g)
S5	Amber	5/32"	3" (76.2 mm)	6-1/2" (165.1 mm)	1.6 oz. (45 g)
S6	Black	3/16"	3" (76.2 mm)	6-5/8" (168.3 mm)	1.6 oz. (45 g)
S7	Brown	7/32"	3" (76.2 mm)	6-5/8" (168.3 mm)	1.6 oz. (45 g)
S8	Red	1/4"	3" (76.2 mm)	6-5/8" (168.3 mm)	2.4 oz. (68 g)
S9	Orange	9/32"	3" (76.2 mm)	6-5/8" (168.3 mm)	2.4 oz. (68 g)
S10	Amber	5/16"	3" (76.2 mm)	6-5/8" (168.3 mm)	2.4 oz. (68 g)
S11	Green	11/32"	3" (76.2 mm)	6-5/8" (168.3 mm)	2.4 oz. (68 g)
S12	Blue	3/8"	3" (76.2 mm)	6-5/8" (168.3 mm)	2.4 oz. (68 g)
S14	Brown	7/16"	3" (76.2 mm)	7" (177.8 mm)	3.2 oz. (91 g)
S16	Red	1/2"	3" (76.2 mm)	7" (177.8 mm)	3.2 oz. (91 g)
S18	Red	9/16"	4" (101.6 mm)	8-1/2" (215.9 mm)	4.8 oz. (136 g)
S20	Red	5/8"	4" (101.6 mm)	8-1/2" (215.9 mm)	4.8 oz. (136 g)

Metric Nut Drivers

Additional Features:

- Standard length works for most applications
- Fits over long bolts and studs



70209

Cat. No.	Handle Color	Hex Size	Shaft Length	Overall Length	Weight
70204	Black	4 mm	3" (76.2 mm)	6-5/8" (168.3 mm)	1.6 oz. (45 g)
70245	Black	4.5 mm	3" (76.2 mm)	6-5/8" (168.3 mm)	1.6 oz. (45 g)
70205	Black	5 mm	3" (76.2 mm)	6-5/8" (168.3 mm)	2.4 oz. (68 g)
70255	Black	5.5 mm	3" (76.2 mm)	6-5/8" (168.3 mm)	2.4 oz. (68 g)
70206	Black	6 mm	3" (76.2 mm)	6-5/8" (168.3 mm)	2.4 oz. (68 g)
70207	Black	7 mm	3" (76.2 mm)	6-5/8" (168.3 mm)	2.4 oz. (68 g)
70208	Black	8 mm	3" (76.2 mm)	6-5/8" (168.3 mm)	2.4 oz. (68 g)
70209	Black	9 mm	3" (76.2 mm)	6-5/8" (168.3 mm)	2.4 oz. (68 g)
70210	Black	10 mm	3" (76.2 mm)	7" (177.8 mm)	2.4 oz. (68 g)
70211	Black	11 mm	3" (76.2 mm)	7" (177.8 mm)	3.2 oz. (91 g)

Super-Long Nut Drivers - 18" (457 mm) Shafts


Additional Features:

- Ideal for reaching into walls and other hard-to-reach places where added length is necessary
- Available in magnetic and non-magnetic tips



S1018

Cat. No.	Handle Color	Type	Hex Size	Shaft Length	Overall Length	Weight
S818	Red	Nonmagnetic	1/4" (6.35 mm)	18" (457.2 mm)	21-5/8" (549.27 mm)	4.0 oz. (113 g)
S1018	Amber	Nonmagnetic	5/16" (7.93 mm)	18" (457.2 mm)	21-5/8" (549.27 mm)	4.0 oz. (113 g)
S818M	Red	Magnetic	1/4"	18" (457.2 mm)	21-5/8" (549.3 mm)	4.0 oz. (113 g)
S1018M	Amber	Magnetic	5/16"	18" (457.2 mm)	21-5/8" (549.3 mm)	4.0 oz. (113 g)




Tapping Tools and Awls

Drill Tap Set

- For aluminum, brass, copper, plastic, and mild steel
- 1/4" hex for easier application with quick connect
- Set of six tap sizes plus two extra of the smallest taps
- For use on up to 10 gauge metal
- Made of high speed steel for added durability

IMPACT RATED!

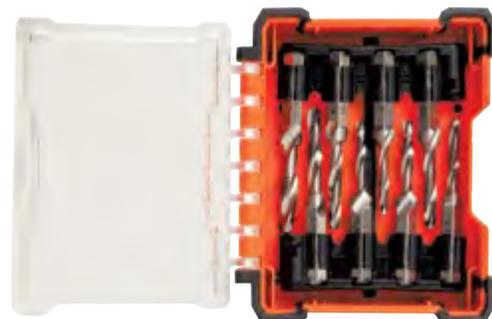

32217

Cat. No.	Tap Sizes Included	Weight
32217	6-32 (2), 8-32 (2), 10-24, 10-32, 12-24, 1/4-20	1.5 lbs. (0.68 kg)
Replacement Taps		
32237	6-32 Drill Tap	4.0 oz. (113 g)
32238	8-32 Drill Tap	4.0 oz. (113 g)
32239	10-32 Drill Tap	4.0 oz. (113 g)
32240	10-24 Drill Tap	4.0 oz. (113 g)
32241	12-24 Drill Tap	4.0 oz. (113 g)
32242	1/4-20 Drill Tap	4.0 oz. (113 g)

NOTE: Read and follow safety instructions in power tool owner's manual.

Cushion-Grip Multi-Bit Tap Tool Driver

- Increases job speed by combining taps and drivers in one tool
- Six common tap sizes (6-32, 8-32, 10-32, 10-24, 12-24, 1/4-20)
- Each tap size rethreads to next larger size if threads are stripped



32517



Cat. No.	Shank Length	Slotted Bits	Phillips Bits	Nut Driver Sizes	Overall Length	Weight
32517	4" (101.6 mm)	1/4" (6.4 mm) and 3/16" (4.8 mm)	#1 and #2	1/4", 5/16" and 3/8"	7-3/4" (196.9 mm)	8.0 oz. (227 g)
Replacement Tap						
Cat. No.	Tap Size	For Use With	Package Quantity			
32518	6-32, 8-32, 10-32, 10-24, 12-24, 1/4-20	Multi-Bit Tap Tool (32517)	6 Taps			

Cushion-Grip 6-in-1 Tap Tool

- Quickly forms new threads, re-forms burred threads, and cleans out plaster obstructions
- Each tap size rethreads to next larger size if threads are stripped



626

Cat. No.	Tap Size	Overall Length	Weight
626	6-in-1 Tap 6-32, 8-32, 10-32, 10-24, 12-24, 1/4-20	7-3/4" (196.9 mm)	4.0 oz. (113 g)
Replacement Tap			
Cat. No.	Tap Sizes	Application	
628-20	10-24, 12-24, 1/4-20	Replacement for 626 and 627-20	
626-32	6-32, 8-32, 10-32	Replacement for 625-32, 626, and 627-20	

See page 310 for additional information on warnings.



Tapping Tools and Awls

Cushion-Grip Scratch Awl

- Professional, heavy-duty, hard-pointed awl
- Scribes metal, starts screw holes, performs a variety of piercing and punching jobs
- Rigid, chrome-plated, heat-treated, tempered-steel shank has full reinforcing bolster at handle for extra strength and impact reinforcement
- Cat. No. 650DD has plated metal strike cap to protect handle from hammer blows and is engineered, manufactured and tested for prying, chiseling and punching



650DD



Cat. No. 650 only

Cat. No.	Blade Length	Overall Length	Weight
650	3-1/2" (88.9 mm)	7-7/8" (200.0 mm)	4.0 oz. (113 g)
650DD	3-1/2" (88.9 mm)	7-7/8" (200.0 mm)	4.8 oz. (136 g)

6-in-1 Tapping Tool

- Quickly forms new threads, re-forms burred threads, and cleans out plaster obstructions
- Each tap size rethreads to next larger size if threads are stripped
- Two high-carbon steel taps are secured in reversible holder



627-20

Cat. No.	Tap Sizes	Overall Length	Weight
627-20	6-32, 8-32, 10-32, 10-24, 12-24, 1/4-20	7-5/8" (193.7 mm)	5.6 oz. (159 g)

Replacement Taps

Cat. No.	Tap Sizes	Application
626-32	6-32, 8-32, 10-32	Replacement for 625-32, 626, and 627-20
628-20	10-24, 12-24, 1/4-20	Replacement for 626 and 627-20

Triple Taps

- Quickly forms new threads, re-forms burred threads, and cleans out plaster obstructions
- Each tap size rethreads to next larger size if threads are stripped



625-24

Cat. No.	Tap Sizes	Color Code	Overall Length	Weight
625-24	6-32, 8-32, 10-24	Blue	7-1/8" (181.0 mm)	3.2 oz. (91 g)
625-32	6-32, 8-32, 10-32	Orange	7-1/8" (181.0 mm)	3.2 oz. (91 g)

Replacement Taps

Cat. No.	Tap Sizes	Application
626-24	6-32, 8-32, 10-24	For Cat. No. 625-24
626-32	6-32, 8-32, 10-32	Replacement for 625-32, 626, and 627-20

Steel Scratch Awl

- One-piece forged-steel blade and bolstered shank
- Heat-treated for long life
- Well-balanced for top efficiency during use
- Black finish for rust resistance



66385

Cat. No.	Blade Length	Overall Length	Weight
66385	3-1/2" (88.9 mm)	7" (177.8 mm)	4.8 oz. (136 g)

