

# Madison Technical Specification

## Robe Hook


# DN6903

### Stock Numbers:

- q **DN6903CH – Robe Hook**  
Polished Chrome Finish  
Concealed Screw Mounting
- q **DN6903PW – Robe Hook**  
Pewter Finish  
Concealed Screw Mounting
- q **BP6903OWB – Robe Hook**  
Old World Bronze Finish  
Concealed Crew Mounting

“BP” SKUs in wholesale packaging

### Dimensions:

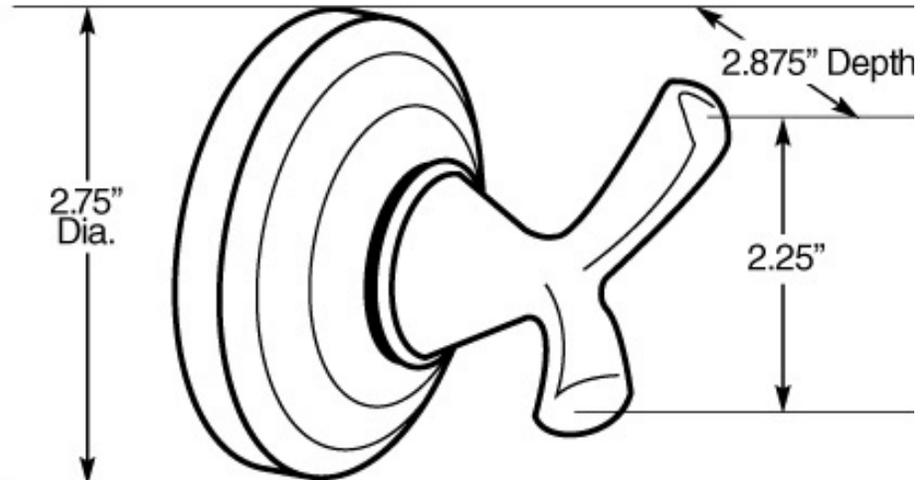

### Materials:

**Robe Hook** is die cast from highest quality zinc alloy (zamac) and finished in a high quality powder coating or metallic plated finish

### Installation Instructions:

1. Position the mounting plate on the wall at desired location with “UP” facing you.
2. One at a time, place each anchor screw through the mounting plate, centered in each large hole. Using a Phillips screwdriver, turn the anchor screw while applying pressure. Screw will self drill and tap into drywall. Do not over tighten.
3. Place assembly over the mounting plate, setscrew facing down.
4. Tighten setscrew.

### Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

**Stock Number:** \_\_\_\_\_ **Robe Hook**  
By CSI Bath Furnishings



25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070  
CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636  
INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726  
CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720  
WWW.CSI.MOEN.COM

©Copyright Creative Specialties International 2006

Literature #BA1014