

# **Specifications**

## DESCRIPTION

 The shower trim is chrome plated metal construction Includes showerhead, arm, flange

#### **OPERATION**

- Acrylic knob style handle, pull-on push-off design
- Temperature operates through an 180° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 2^{\circ}$ .

#### FLOW

• Showerhead is limited to 2.5 gpm (9.5 L/min) CARTRIDGE


- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
  Accommodates back to back installations

#### **STANDARDS**

 Designed and manufactured to comply with the requirements of: CSA B-125 and ASME A112.18.1M and all applicable requirements referenced therein

#### WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



## LEGEND<sup>®</sup> MOENTROL<sup>®</sup> Single-Handle Shower Trim Kit

Model: T171 (Bulk Packed 12 Per Carton)

> NOTE: See reverse side for illustrated parts

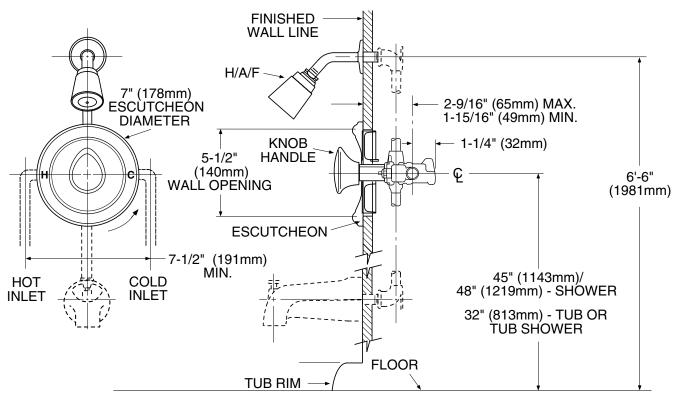

# **CRITICAL DIMENSIONS**

(DO NOT SCALE)