

# 1700 Series Cabinets

## Fire Valve Cabinets



Models 1700-1728



### Ordering Options

#### Optional Door & Frame Materials:

- ☐ **AL** - Clear Anodized Aluminum
- ☐ **SS** - No. 4 304 Stainless Steel

#### Door Style:

- ☐ **A** - Full Panel
- ☐ **D** - Horizontal Duo Panel
- ☐ **DV** - Vertical Duo Panel
- ☐ **E** - Solid Panel

#### Door Glazing:

- ☐ Clear Acrylic
- ☐ **T** - Clear Tempered Glass
- ☐ **S** - Laminated Safety Glass
- ☐ **W** - Clear Wire Glass w/ Safety Film

#### Recessed Flange (Trimless Cabinets):

- ☐ **WB** - 5/8" Drywall Bead Flange
- ☐ **PW** - 3/4" Plaster Flange

#### Additional Options:

- ☐ **FR** - Fire-rated Tub
- ☐ **1836** - Breakable Cylinder Lock
- ☐ Decal/Die Cut Lettering \_\_\_\_\_ (Specify)

Croker Division  
Fire-End & Croker Corporation  
7 Westchester Plaza  
Elmsford, NY 10523

1-800-759-FIRE  
[info@croker.com](mailto:info@croker.com)  
[www.croker.com](http://www.croker.com)

## Application

1700 Series cabinets will accommodate a 1 1/2" or 2 1/2" fire department valve and cap with chain. Models 1710 through 1718 will accommodate a 2 1/2" fire department valve with 2 1/2" x 1 1/2" reducer and 1 1/2" cap with chain. Models 1720 through 1728 will accommodate a 2 1/2" pressure reducing valve and cap with chain.

## Standard Features

- 20 gauge cold rolled steel door, frame, and tub with a white powder-coat suitable as a finish or primer coat. Flush doors with 5/8" door stop are attached by a 180° continuous hinge and equipped with a zinc-plated pull handle and roller catch. Surface mounted models have square edge trim. Trimless models are designed with a 5/8" recessed flange for drywall installation (WB), or 3/4" recessed flange for plaster or stucco wall (PW). 1 3/4" face trim on frame and 1 1/4" trim on doors with glazing. Full and duo panel doors come standard with a clear acrylic glazing (plexiglass).
- Hardware: Includes Model 1834 pull handle with (2) screws, roller catch with (2) screws, glass clips with set screws.
- Knockouts: Standard on trimless, recessed, and semi-recessed models. Knockout locations must be specified on surface mounted cabinets. Knockouts are not available on fire-rated or stainless steel tubs.

## Optional Features

- **AL** 18 gauge No. 180 clear satin anodized aluminum door and frame. Surface mounted models have square edge trim and clear anodized aluminum tubs. Trimless models have a tub constructed of 20 gauge cold rolled steel with a silver powder-coated finish. Rolled edge aluminum trim is formed of extrusions.
- **SS** 20 gauge type 304 No. 4 stainless steel door and frame. Surface mounted models have rolled edge trim and stainless steel tubs with a galvanized back panel. Trimless models have a tub constructed of 20 gauge cold rolled steel with a silver powder-coated finish.
- **FR** Fire-Rated 20 gauge steel tub with white powder-coat, insulated with Firespan™ 90 by Thermafiber®, a UL-Listed, inorganic, mineral wool fiber insulation with high recycled content, attached to the exterior of the tub and forms a flange to cover cut edges of wallboard material. These cabinets have been tested by Underwriters Laboratories® to maintain one and two-hour fire-rated wall barriers in accordance with ANSI/UL-1479, ASTM E814 and ULC/Can S115 for membrane and penetration firestops. Installation instructions must be strictly adhered to in order to obtain the fire rating. This option is not available for surface mounted models.
- **Cabinet Options & Accessories** - Refer to this section of the Croker catalog for all available cabinet options and accessories, including custom powder coat finishes and glazings, decals and die-cut lettering, etched and engraved lettering, locks, alarms, and more!



**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Call Croker for current listings and approvals. Dimensions and weights are approximated and do not include packaging. All products, product specifications, and data are subject to change without notice to improve reliability, function, design, or otherwise. If there is any question about a specific product's origin, contact the Customer Service Department.

# 1700 Series Cabinets

## Fire Valve Cabinets




Models 1700-1728

### Available Models & Dimensions



Model	Trim Style	Trim Depth	Inside Box Dimensions			Frame O.D.		Knockout Locations			Wall Opening Non-rated			Wall Opening Fire-rated		
			A	B	C	E	F	J	G	K	Width	Height	Depth	Width	Height	Depth
□ 1700	Recessed	3/8	18	18	8	21 3/8	21 3/8	4	9	2 1/2	19	19	7 7/8	20 5/16	20 5/16	8 15/16
□ 1701	Semi-recessed	1 1/4	18	18	8	21 3/8	21 3/8	4	9	2 1/2	19	19	6 7/8	20 5/16	20 5/16	7 15/16
□ 1702	Semi-recessed	2 1/2	18	18	8	21 3/8	21 3/8	4	9	2 1/2	19	19	5 5/8*	20 5/16	20 5/16	6 11/16*
□ 1706	Trimless	----	18	18	8	20 1/2	20 1/2	4	9	4	19	19	8 1/8	20 5/16	20 5/16	8 11/16
□ 1708	Surface	----	21 3/16	21 3/16	8 1/2	21 3/8	21 3/8	**	**	**	----	----	----	----	----	----
□ 1710	Recessed	3/8	18	18	10	21 3/8	21 3/8	5	9	5	19	19	9 7/8	20 5/16	20 5/16	10 15/16
□ 1711	Semi-recessed	1 1/4	18	18	10	21 3/8	21 3/8	5	9	5	19	19	8 7/8	20 5/16	20 5/16	9 15/16
□ 1712	Semi-recessed	2 1/2	18	18	10	21 3/8	21 3/8	5	9	5	19	19	7 5/8*	20 5/16	20 5/16	8 11/16*
□ 1716	Trimless	----	18	18	10	20 1/2	20 1/2	5	9	5	19	19	10 1/8	20 5/16	20 5/16	10 11/16
□ 1718	Surface	----	21 3/16	21 3/16	10 1/2	21 3/8	21 3/8	**	**	**	----	----	----	----	----	----
□ 1720	Recessed	3/8	26	26	10	29 3/8	29 3/8	5	13	5	27	27	9 7/8	28 5/16	28 5/16	10 15/16
□ 1721	Semi-recessed	1 1/4	26	26	10	29 3/8	29 3/8	5	13	5	27	27	8 7/8	28 5/16	28 5/16	9 15/16
□ 1722	Semi-recessed	2 1/2	26	26	10	29 3/8	29 3/8	5	13	5	27	27	7 5/8*	28 5/16	28 5/16	8 11/16*
□ 1726	Trimless	----	26	26	10	28 1/2	28 1/2	5	13	5	27	27	10 1/8	28 5/16	28 5/16	10 11/16
□ 1728	Surface	----	29 3/16	29 3/16	10 1/2	29 3/8	29 3/8	**	**	**	----	----	----	----	----	----

ALL DIMENSIONS ARE IN INCHES. \*\*KNOCKOUTS ARE NOT PROVIDED ON SURFACE MOUNTED CABINETS UNLESS SPECIFIED. KNOCKOUTS ARE NOT AVAILABLE ON STAINLESS STEEL OR FIRE-RATED TUBS. \*ADD 5/8" TO DEPTH OF WALL OPENING REQUIRED FOR CABINETS WITH ALUMINUM FRAMES. PRESSURE REDUCING VALVES WITH A REDUCER AND CAP WITH CHAIN MAY REQUIRE A 12" DEEP TUB.

### Trim Guide (Top View)

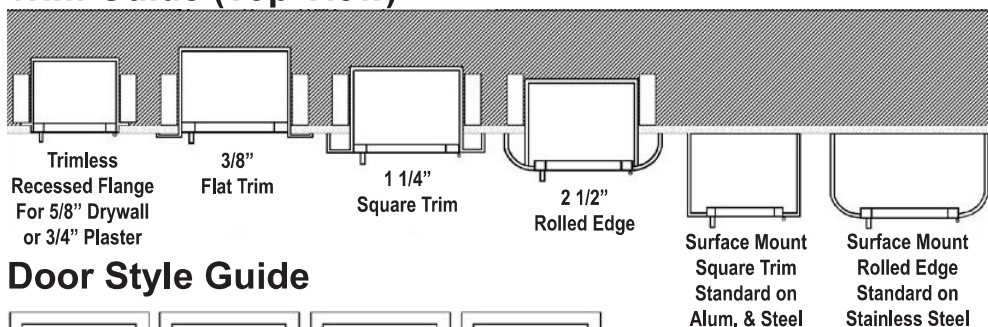

### Door Style Guide

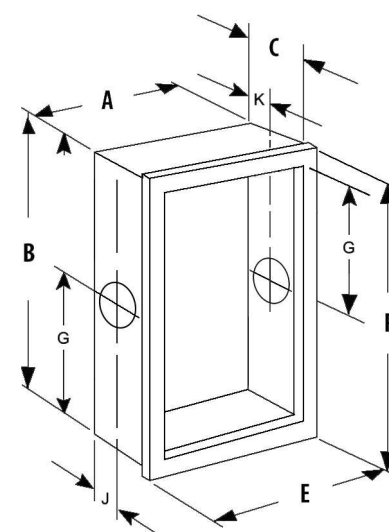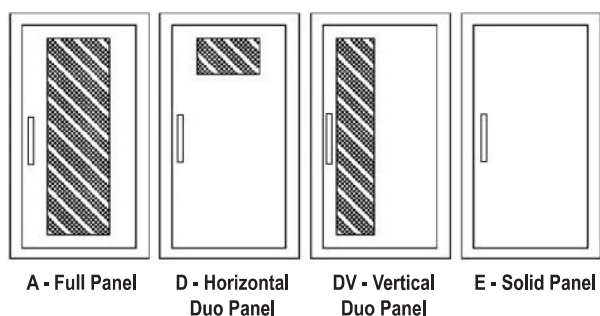

Croker Division  
Fire-End & Croker Corporation  
7 Westchester Plaza  
Elmsford, NY 10523  
1-800-759-FIRE  
[info@croker.com](mailto:info@croker.com)  
[www.croker.com](http://www.croker.com)

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Call Croker for current listings and approvals. Dimensions and weights are approximated and do not include packaging. All products, product specifications, and data are subject to change without notice to improve reliability, function, design, or otherwise. If there is any question about a specific product's origin, contact the Customer Service Department.