



Location: \_\_\_\_\_



# A2 BODY A2 BODY

**Specification:** MIFAB's lacquered cast iron A2 body Series manufactured with 15" diameter top flange designed with recessed grooves cast into the top for secure water-proofing sealing, weepholes, 1/2" trap seal primer tapping and plug and three 5/16" tapings on the top flange and underneath the top flange to receive hardware to connect with MIFAB's various membrane clamps and / or underdeck clamps. Available in either cast iron, PVC and / or ABS material in various outlet connection sizes (see chart below).

**Function:** Universal body that is used with all MIFAB F1340, F1360, F1440, F1460 and R1200 Series of floor and area drains. One common body for all of these floor and roof drains provides efficiency on the jobsite because the same body can be affixed to every pipe that is used to drain large area and roof drains.

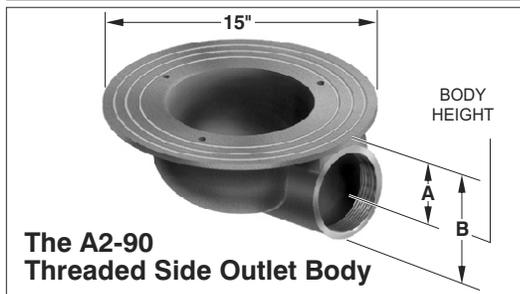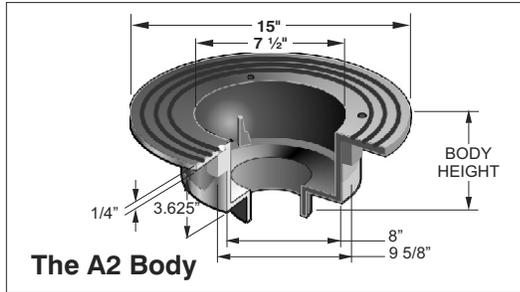

## A2 BODY

PIPE SIZE	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) ABS (-31)
2"	5 3/4"	5 1/2"	6 1/2"	6 1/2"	6 3/4"
3"	5 3/4"	5 1/2"	6 5/8"	6 1/2"	7 1/2"
4"	5 3/4"	5 1/2"	5 1/2"	6 1/2"	7 5/8"
5"	5 3/4"	-	6 5/8"	6 3/4"	-
6"	7 1/4"	5 5/8"	5 5/8"	6 1/2"	-
8"	5 7/8"	-	-	See note*	-

\*FOR DRAINS REQUIRING AN 8" INSIDE CAULK CONNECTION, USE A7-8X BODY

## A2-90

MODEL NUMBER	PIPE SIZE	"B" BODY HEIGHT	"A" DIMENSION THREADED OUTLET	"A" DIMENSION NO HUB OUTLET
A2-2T-90-7	2"	5 3/4"	4"	3 7/8"
A2-3T-90-7	3"	5 3/4"	3 1/2"	3 3/8"
A2-4T-90-7	4"	5 3/4"	2 7/8"	2 7/8"
A2-6T-90-7	6"	8 1/4"	4 9/16"	4 1/4"

## A2-90-NH

MODEL NUMBER	PIPE SIZE	"B" BODY HEIGHT	"A" DIMENSION THREADED OUTLET	"A" DIMENSION NO HUB OUTLET
A2-2T-90-NH-7	2"	5"	4"	2 3/4"
A2-3T-90-NH-7	3"	5"	3 1/2"	1 3/4"
A2-4T-90-NH-7	4"	5"	2 7/8"	5/8"

**Note:** No hub outlet connections are the standard outlet connection provided by MIFAB. No suffix is required to indicate the no hub outlet connection.

SUFFIX	OPTIONAL VARIATIONS
-11	Acid Resistant Coated Epoxy Body
-13	Galvanized Body
-28	Stainless Steel Body (Type 304)
-30	PVC Connection Body (2", 3" or 4")
-31	ABS Connection Body (2", 3" or 4")
-34	Close plug (C1440 Series)

SUFFIX	OPTIONAL VARIATIONS
-90	Threaded side outlet connection (2", 3", 4", 6"). Not available in ABS / PVC
-90NH	No hub side outlet connection (2", 3" or 4"). Not available in ABS / PVC
P	Push On Connection Body (2", 3" or 4")
T	Threaded Connection Body (2", 3" or 4")
X	Inside Caulk Connection Body (2", 3" or 4")

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_