




SUBMITTAL INFORMATION

Uni-Flange Restrainer (UFR1350-C-x-X-I style)




4" - 12" UNI-FLANGE SERIES 1350-C RESTRAINT DEVICE
FOR PVC PIPE BELL WITH 304 STAINLESS STEEL HARDWARE

1350 BACK-UP RING

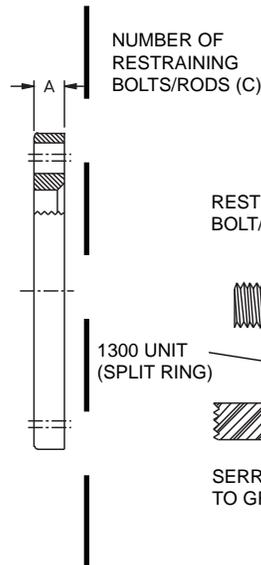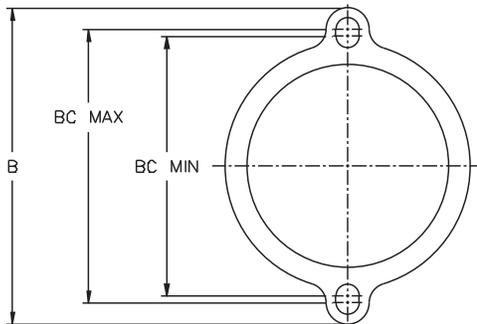

1350 ASSEMBLY

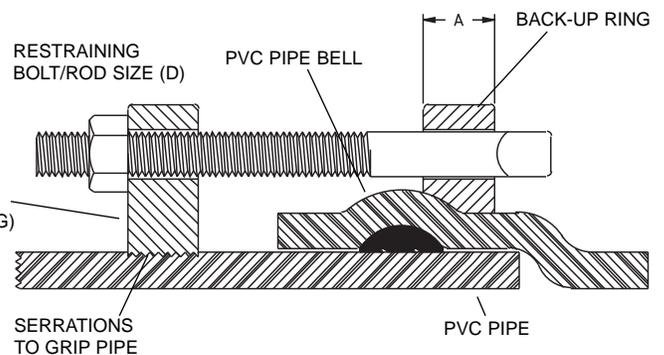

NOM PIPE SIZE	PVC PIPE WITH DI PIPE OD STYLE 1350-C		A	B APPROX.	RESTRAINING RODS		BC MAX	BC MIN	APPROX. WT. LBS.	✓ SUBMITTED ITEMS
	OD	CATALOG No.			QTY. C	SIZE D				
4"	4.80	UFR1350-C-4-X-I	1-1/8"	9-1/8"	2	3/4" x 9"	7.50"	7.50"	12.8	
6"	6.90	UFR1350-C-6-X-I	1-1/8"	11-7/8"	2	3/4" x 9"	10.25"	9.75"	16.3	
8"	9.05	UFR1350-C-8-X-I	1-1/4"	14-5/8"	2	3/4" x 12"	13.00"	12.50"	25.8	
10"	11.10	UFR1350-C-10-X-I	1-3/8"	16-5/8"	4	3/4" x 17"	15.00"	15.00"	43.4	
12"	13.20	UFR1350-C-12-X-I	1-3/8"	19-1/4"	4	3/4" x 17"	17.62"	17.62"	49.8	

FEATURES

- Back-up ring - 4" - 12" sizes, Ductile iron per ASTM A536, grade 65-45-12
- T-bolts / rods (included) - 304 stainless steel per ASTM A193 and ASTM A194
- Split ring restraint - 4" - 12" sizes: Uni-Flange Block Buster Series 1300 made from ductile iron per ASTM A536, grade 65-45-12
- Rated at full-rated pressure for most PVC pipe, minimum 2:1 safety factor
 - Not recommended for use on AWWA C900, DR-14 PVC pipe (use Series 1390)
- Black e-coat epoxy coating

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



05/06/15

Submitted By: