



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-C-xx-I style)




SERIES 1390-C 14" - 42" RESTRAINT DEVICE FOR PVC PIPE BELL AND SPIGOT JOINTS

1300 SPLIT RESTRAINT

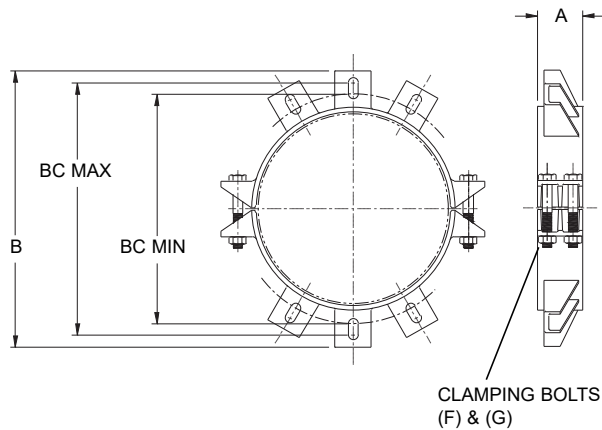

1390 ASSEMBLY

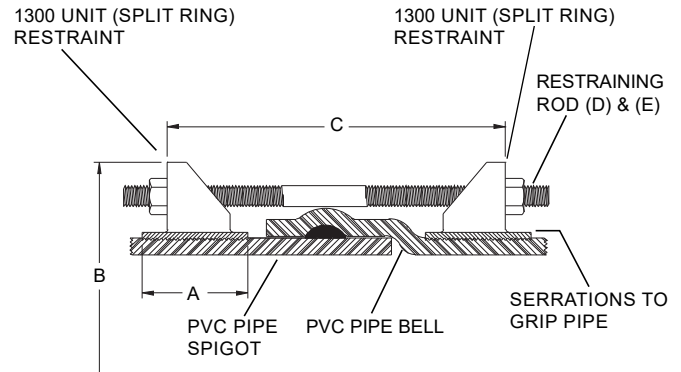

NOM PIPE SIZE	PVC PIPE WITH DI PIPE OD STYLE 1390-C		A	B APPROX	C MAX	RESTRAINING RODS		CLAMPING BOLTS		BC MIN	BC MAX	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
	OD	CATALOG No.				QTY. D	SIZE E	QTY. F	SIZE G				
14"	15.30	UFR1390-C-14-I	4"	22-5/16"	15"	6	3/4" x 30"	4	7/8" x 7"	18.50"	20.50"	123	
16"	17.40	UFR1390-C-16-I	4"	24-27/64"	15"	6	3/4" x 30"	4	7/8" x 7"	20.50"	22.50"	124	
18"	19.50	UFR1390-C-18-I	5"	26-35/64"	15"	8	3/4" x 30"	4	1" x 7"	22.75"	24.75"	176	
20"	21.60	UFR1390-C-20-I	5"	28-55/64"	22"	8	3/4" x 36"	4	1-1/8" x 9"	25.00"	27.00"	229	
24"	25.80	UFR1390-C-24-I	5"	33-35/64"	22"	12	3/4" x 36"	4	1-1/8" x 9"	29.50"	31.50"	298	
30"	32.00	UFR1390-C-30-I	7"	40-57/64"	22"	12	1" x 48"	6	1-1/8" x 6"	36.18"	38.18"	441	
36"	38.30	UFR1390-C-36-I	7"	48-23/64"	22"	12	1" x 48"	6	1-1/8" x 6"	42.50"	45.50"	508	
42"	44.50	UFR1390-C-42-I	10-3/4"	57-9/16"	22"	16	1-1/4" x 52"	8	1-1/8" x 6"	49.13"	54.13"	1232	

Note: For DR18, longer rods may be required. Please contact factory for more information.

FEATURES

- 14" - 42" sizes: Ductile iron per ASTM A536, grade 65-45-12
- Rods (included) - high strength, low alloy steel per ANSI / AWWA C111/A21.11
- Rated at full rated pressure of any class of PVC pipe, minimum 2:1 safety factor
- Coating: Black epoxy

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



05/22/18

Submitted By: