

Description (Sample Specification Language)

Manifolds are installed where multiple runs are made from a common location in parallel arrangement.

Features:

- Quick & Easy Installation
- Central Distribution Point for Appliance Runs
- Multiple mounting options




Listings:

- CSA: Certificate No. 2728525
- ICC-ES: Report No. PMG 1019
- IAPMO: File No. C-3250

Technical Data:

General

PORTMAN Material	ASTM A47 32510 Malleable Iron
111596-08 Material	Sch 40 Steel Pipe, Welded Polyester Coating

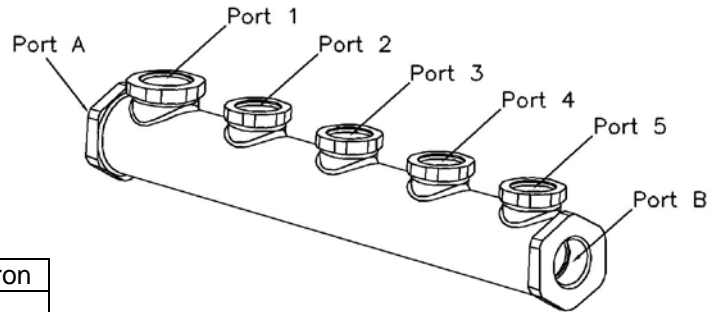

Dimensional Characteristics

P/N	Manifold Length	Port A (NPT)	Port 1 (NPT)	Port 2 (NPT)	Port 3 (NPT)	Port 4 (NPT)	Port 5 (NPT)	Port B (NPT)	Test Port (NPT)	Weight (lbs)
3-PORTMAN	7-5/8"	3/4"	1/2"	1/2"	1/2"	--	--	1/2"	1/4"	1.5
3-PORTMAN-1	7-5/8"	1/2"	1/2"	1/2"	1/2"	--	--	1/2"	--	1.5
4-PORTMAN	10-1/4"	3/4"	1/2"	1/2"	1/2"	1/2"	--	1/2"	1/4"	1.9
4-PORTMAN-2	12-1/8"	1-1/2"	3/4"	3/4"	3/4"	3/4"	--	1-1/2"	--	7.2
4-PORTMAN-3	14-3/8"	2"	1"	1"	1"	1"	--	1-1/2"	--	8.6
5-PORTMAN	12-31/32"	3/4"	3/4"	1/2"	1/2"	1/2"	1/2"	1/2"	1/4"	2.2
5-PORTMAN-1	12-31/32"	1"	3/4"	1/2"	1/2"	1/2"	1/2"	3/4"	1/4"	2.5
5-PORTMAN-2	14"	1-1/4"	3/4"	3/4"	3/4"	3/4"	3/4"	1"	--	6.7
111596-08	11-5/8"	3/4"	1/2"	1/2"	1/2"	1/2"	--	3/4" M	--	1.9