

### Features

- Brass construction.
- One-piece, self-contained ceramic disc valve allows both volume and temperature control.
- Temperature memory allows faucet to be turned on and off at any temperature setting.
- High-temperature limit setting for added safety.
- Single-hole mounting.
- 4-9/16" (116 mm) spout reach.
- Stationary spout.
- Less drain.
- Lever handle.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)].

### Optional Accessories

- K- 7107 Decorative Drain
- K- 7108 Decorative Drain
- K- 7114 Pop-Up Drain
- K- 7124 Pop-Up Clicker Drain
- K- 7127 Drain
- K- 7129 Drain



ADA

### Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF 61  
NSF 372  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
ADA  
ICC/ANSI A117.1  
All applicable US Federal and State material regulations

### KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

#### Color Code Description

● CP Polished Chrome

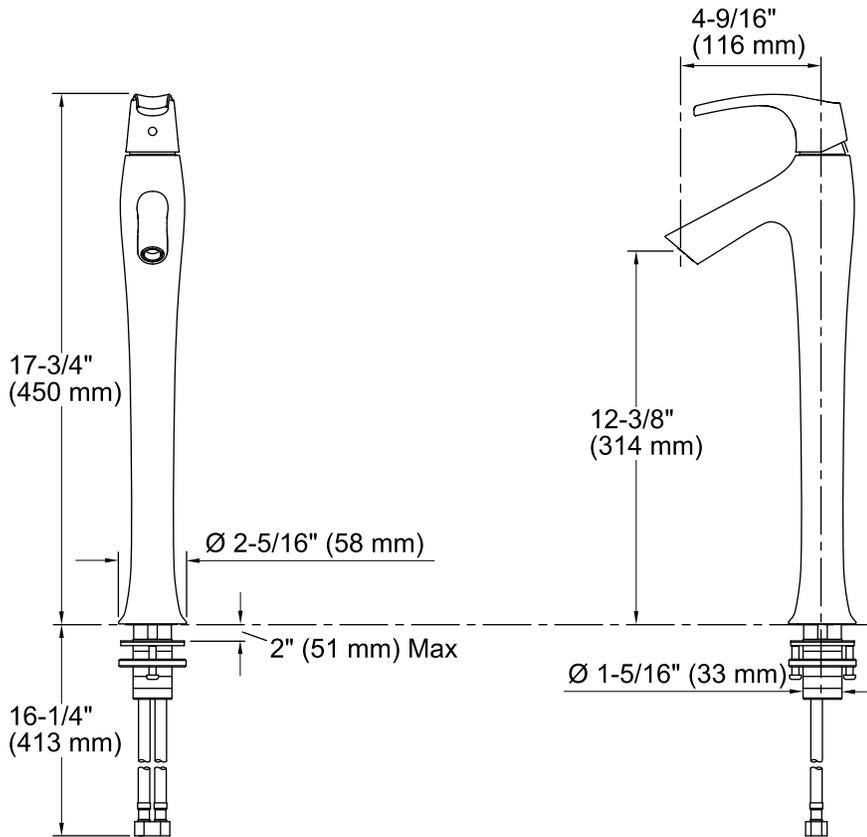

**Technical Information**

All product dimensions are nominal.

Spout reach: 4-9/16" (116 mm)

**Faucet:**

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

**Notes**

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.