

DESCRIPTION

The ALL-PRO 500 series utilizes a 5" aperture designed to accommodate smaller sized PAR20 and PAR30 halogen lamps.

APPLICATION

The 5" diameter trim size makes the EI500RAT the right choice for applications where dramatic yet inconspicuous lighting is required in an existing ceiling. Designed for use in insulated ceiling applications and may be completely covered in insulation. This is an AIR-TITE housing and it meets restricted airflow requirements.

DESIGN FEATURES

A...Housing

Die stamped 20 gauge aluminum. Integral flange secures fixture against ceiling.

B...Remodel Clips

Four remodel clips secure housing and accommodate 1/2" and 5/8" ceiling thickness.

C...Junction Box

U.L. listed for through branch circuit wiring. Seven conduit knockouts are uniform 1/2" size with true pryout slots. Four Romex pryouts simplify Romex installation.

D...Socket

Porcelain socket with nickel plated brass screw shell, snaps into trim for consistent lamp positioning. Shipping insert protects socket from overspray.

E...Thermal Protector

Integral Thermal Protector deactivates fixture if an incorrect lamp is used or if ceiling insulation material is not applied correctly.

Labels.


- UL Listed for Damp Location
- UL listed for Feed Through
- UL listed for Direct Contact with Insulation and

combustible material

• CSA Certified

Meets following requirements:

- State of California Title 24
- Washington State Energy Code
- International Energy Conservation Code (IECC)
- New York State Energy Conservation Construction Code (NY-ECCC)
- Model Energy Code MEC
- Certified Under ASTM-E283




EI500RAT

**5" Insulated Ceiling
AIR-TITE™ Recessed
Remodel Housing**

5" TRIMS

**FOR USE IN
INSULATED
CEILINGS**

**FOR USE IN
EXISTING CEILINGS**

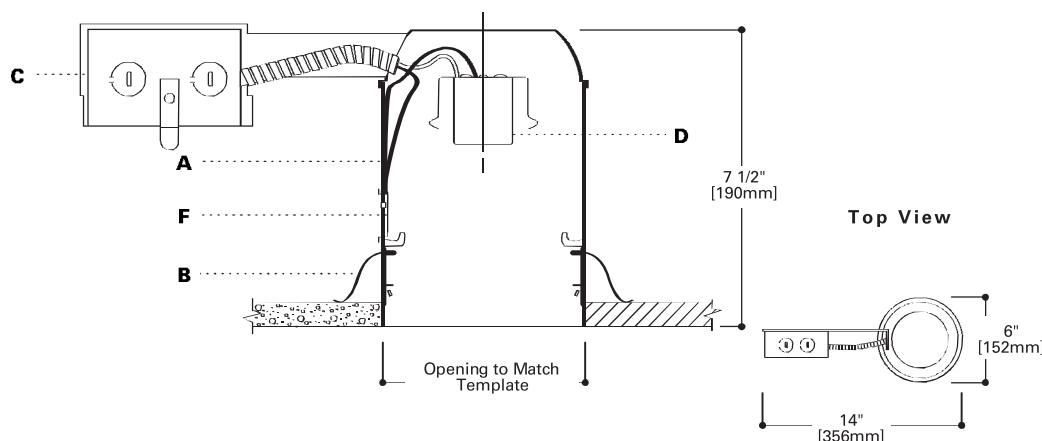

airtite™

with all trims listed

Ordering Information on reverse.

TRIMS

ORDERING INFORMATION

SAMPLE NUMBER: E1500RATERT513

Order housing and trim separately.

Housing

E1500RAT=5" AIR-TITE
Insulated Ceiling
Remodel
Housing

Trims



ERT513

Black Metal Baffle
50W PAR30L, 65W BR30
ERT513=Black Baffle

OD: 6 1/2" (165mm)



ERT513WHT

White Metal Baffle
75W PAR30L, 65W BR30
ERT513WHT=White Baffle
High Gloss Appliance White Finish

OD: 6 1/2" (165mm)



ERT570

Eyeball (30° Tilt)
75W PAR30
ERT570=High Gloss Appliance White Finish

OD: 6 1/2" (165mm)



ERT520

Reflector Cone
60W BR30, 50W PAR30L, 50W PAR30
ERT520=Specular Clear Reflector, High Gloss Appliance White Finish
Trim Ring

OD: 6 1/2" (165mm)



ERT552

Fresnel Lens Shower Light
35W PAR30L
ERT552=Fresnel Lens, High Gloss Appliance White Finish Trim Ring

OD: 6 1/2" (165mm)

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com