## SYNIRON 2 BOOTZCAST AFR (ABOVE FLOOR ROUGH) PORCELAIN ENAMEL 60" X 30" X 16 5/8" BATHTUB



O11-2394 RH DRAIN, SLIP RESISTANT O11-2395 LH DRAIN, SLIP RESISTANT

#### **DESCRIPTION:**

The SYNIRON 2 AFR (Above Floor Rough) is a 60" x 30" x 16 5/8" bathtub encased with a SYNIRON 2 composite backed material. The SYNIRON 2 AFR bathtub is designed for above floor installations and has a raised bathing well floor to allow for above floor drain installations (e.g. hotel, motel, concrete floor installations). The SYNIRON 2 AFR is "the affordable alternative to cast iron" designed to improve heat retention, prevent handling and installation damage. The SYNIRON 2 traditional style with a standard "straight" back support. Construction is a one piece heavy gauge seamless steel with an acid resistant porcelain enamel finish. The SYNIRON 2 AFR weighs 83 lbs., easy to install into a bathtub alcove -"just set it and level it". The full length support pad offers added strength and sound deadening. The SYNIRON 2 AFR complies with ASME A119.1-2008/CSA B45.2-08 Enameled Cast Iron and Enameled Steel Plumbing Fixtures, ADA American Disabilities Act, F462 Consumer Safety Specification for Slip Resistant Bathing Facilities, ASTM E 162-08 Surface Flammability, and ASTM E662-06 Smoke Density. Available in white, bone and biscuit colors with a right and left drain. Made in the USA.

Weight: 83 lbs.





# SYNIRON 2 BOOTZCAST AFR (ABOVE FLOOR ROUGH) PORCELAIN ENAMEL 60" X 30" X 16 5/8" BATHTUB


### **SYNIRON 2, 5' Bathtub** 60" x 30" x 16 5/8"

#### **Raised Outlet**

011-2394 RH Drain, slip resistant 011-2395 LH Drain, slip resistant

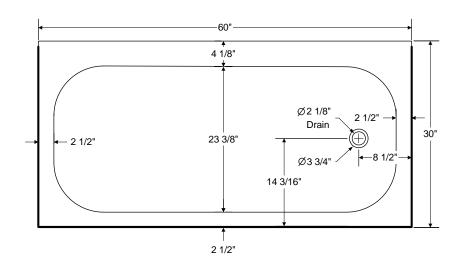

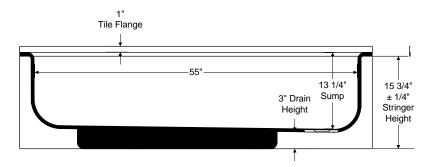





#### Complies with:

All fixtures are compatible or comply with ANSI, ASME, CSA, WW-P 541, HUD-FHA-VA, LEED and the "Buy America Act" where applicable when installed accordingly.

#### Standard Features:

"The affordable alternative to cast iron"
Full length sound deadening pad
Slip resistant bottom
Set it and level it

#### Made in the USA

All Dimensions +\-1/8" unless otherwise noted.

Dimensions shown are for reference.

Actual dimensions may vary slightly and should be checked prior to installation

SS 5/14